



UNDERGROUND SERVICE		
	200 AMP	400 AMP
CONDUIT	2 1/2"	(2) 2 1/2"
COPPER GROUND WIRE	#4	1/0


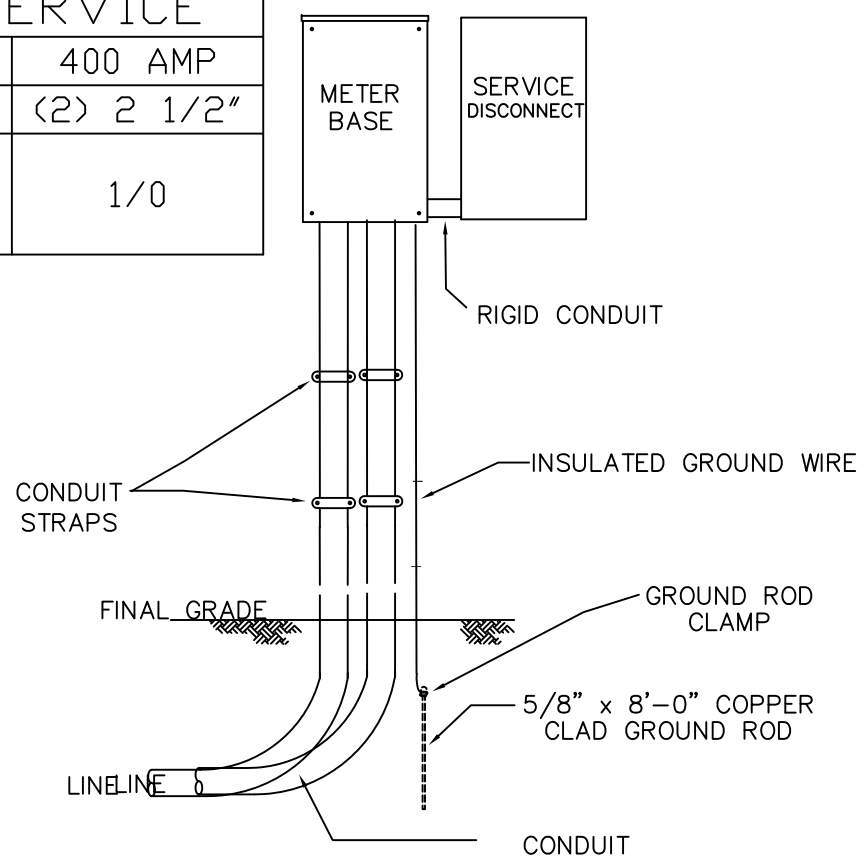


FLORENCE UTILITIES ELECTRICITY		
SCALE NTS	APPROVED BY	DRAWN BY
DATE 01/06/22		T. PIGG
200 & 400 AMP RESIDENTIAL UNDERGROUND SERVICE METERBASE & DISCONNECT LAYOUT		
W.O.#		DRAWING NUMBER
		S-6098

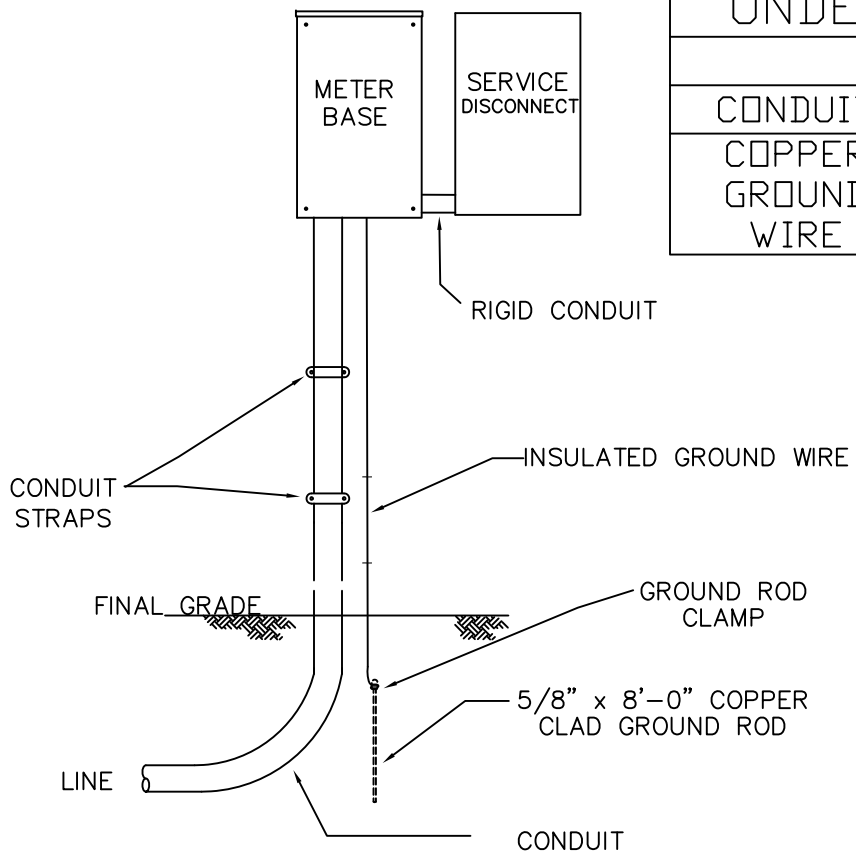


REVISED	
DATE	INITIALS

200, 400, & 600 AMP UNDERGROUND COMMERCIAL SERVICES

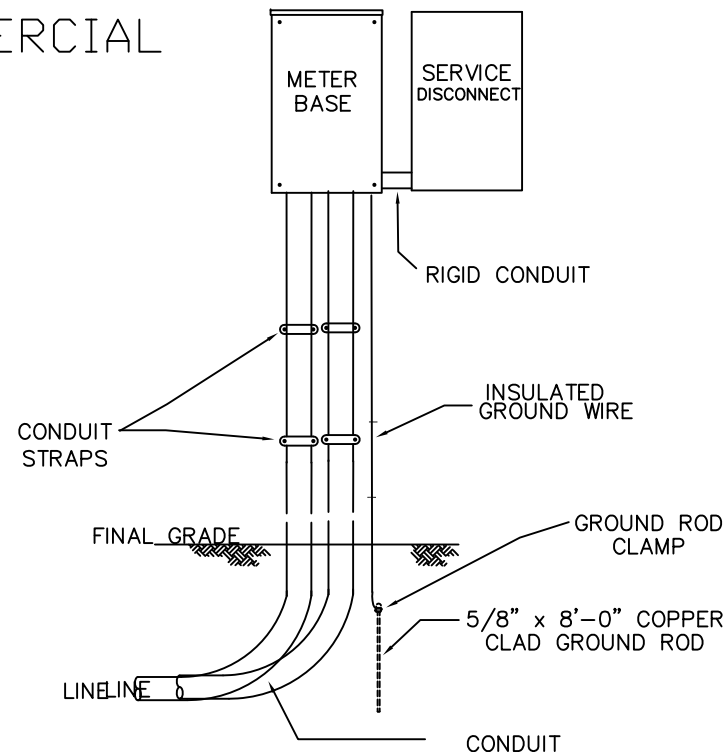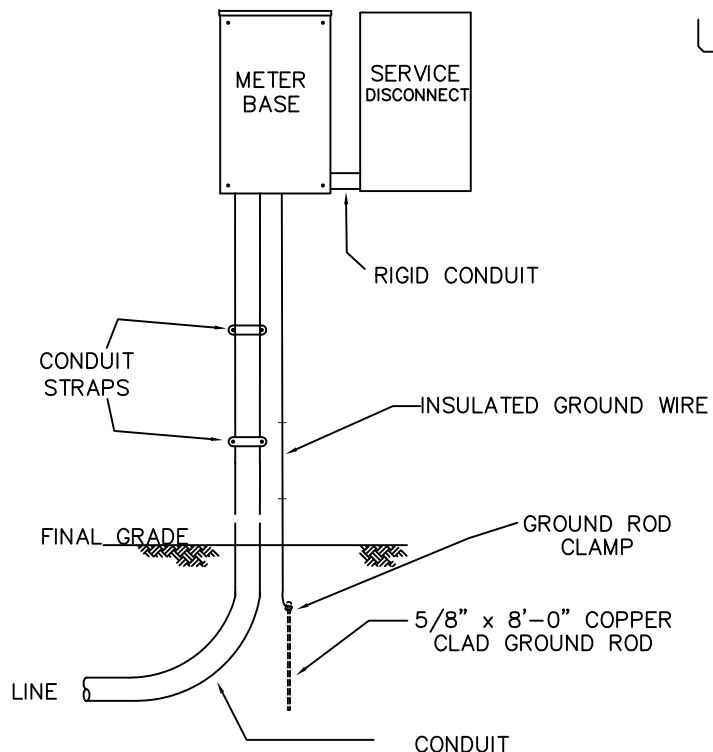

- 1.) ALL PHASE, NEUTRAL, AND GROUNDING CONDUCTORS MUST BE INSULATED.
- 2.) SERVICE WIRE SIZE SHALL COMPLY WITH NATIONAL ELECTRIC CODE
- 3.) WHEN INSTALLING A 480Y/277 SERVICE, METERING AND DISCONNECT INSTALLATION TO BE DETERMINED BY F.E.D. MANAGER AND ENGINEER

	FLORENCE UTILITIES ELECTRICITY																
	SCALE NTS	APPROVED BY	DRAWN BY														
	DATE 01/06/22		T. PIGG														
200, 400, & 600 AMP COMMERCIAL UNDERGROUND SERVICE METERBASE & DISCONNECT LAYOUT																	
W.O.#		DRAWING NUMBER															
		S-6099															
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="2" style="text-align: center;">REVISED</th> </tr> <tr> <th style="text-align: center;">DATE</th> <th style="text-align: center;">INITIALS</th> </tr> </thead> <tbody> <tr><td> </td><td> </td></tr> <tr><td> </td><td> </td></tr> <tr><td> </td><td> </td></tr> <tr><td> </td><td> </td></tr> <tr><td> </td><td> </td></tr> </tbody> </table>				REVISED		DATE	INITIALS										
REVISED																	
DATE	INITIALS																