




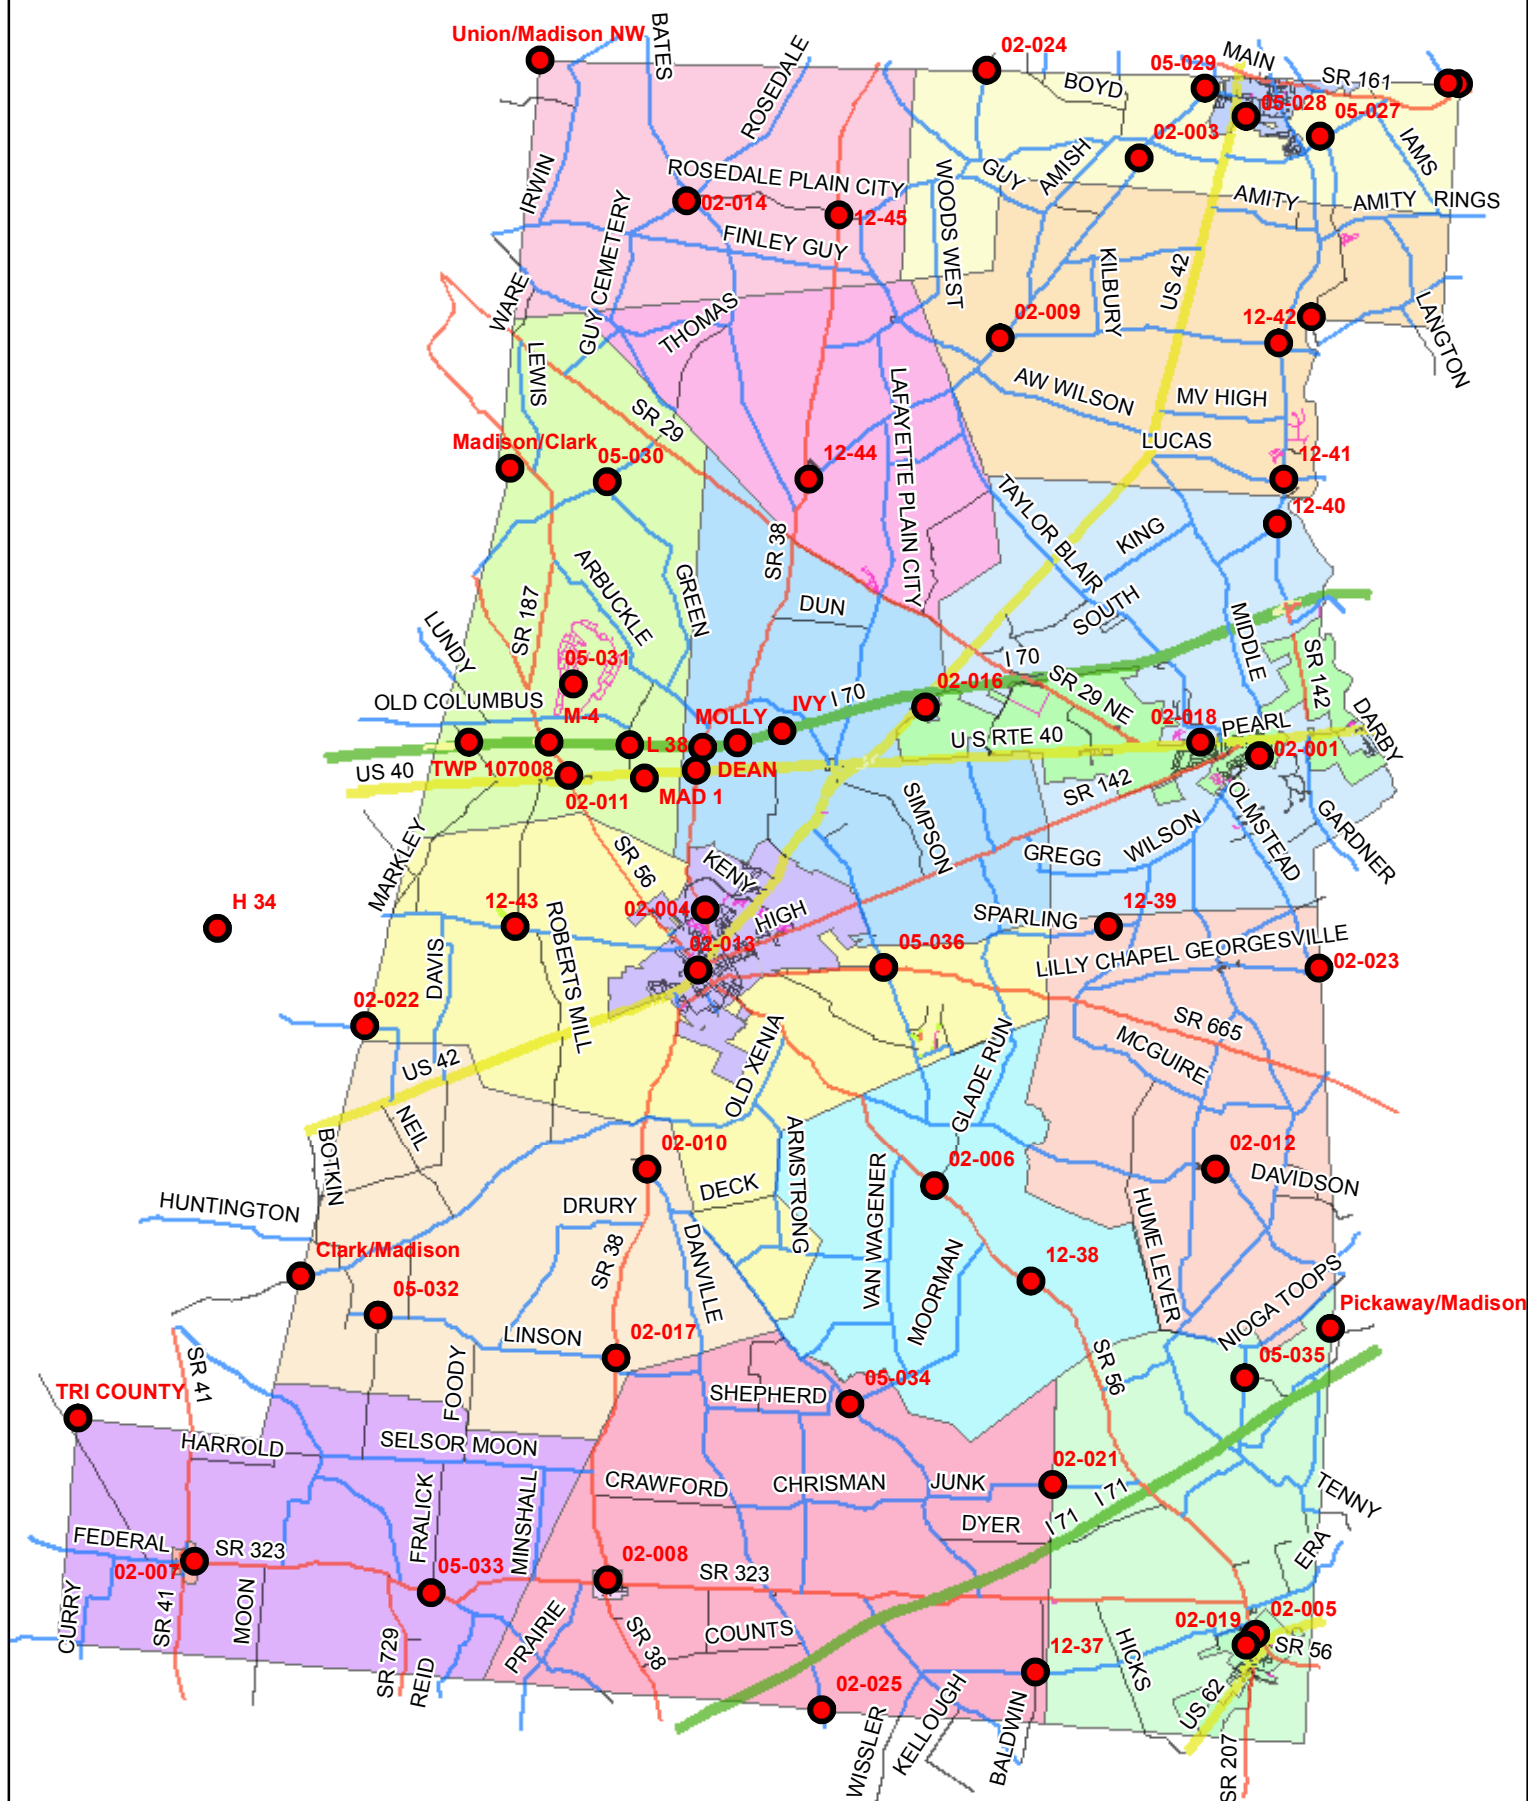

CANTER SURVEYING
GPS SERVICES, INC.

PROJECT: 22010
MADISON CO. ENGINEER
222 GARFIELD AVE
LONDON, OH 43140

REPORT ON ESTABLISHMENT OF SURVEY MARK


DESCRIPTION OF MARK	DATE	QUAD: X	STATE: OHIO
02-001	3-20-02	INDEX:	COUNTY: MADISON
WGS 84		GRID ZONE: OH SOUTH	HEIGHT
LAT: N39°56'25.546180"		N 707671.3895	ELLIPSOID: 246.1714 m
LONG: W83°16'9.274955"		E 1752805.6813	ORTHO: 916.14 FT.
HORIZONTAL DATUM: NAD 83 (95)		PAF: X	GRID METERS
VERTICAL DATUM: NAVD 88		GEOID MODEL: GEOID 99	N 215698.6709
		E 534256.2402	ORTHO: 279.24 m.


NOTE: ALL
ELEVATIONS ARE
BASED ON GPS

DETAILED STATION DESCRIPTION

BRASS TABLET IN POURED IN PLACE MONUMENT IN THE VILLAGE OF WEST JEFFERSON.

SURVEY MONUMENT IS 15' EAST OF CEMETERY ROAD, APPROXIMATELY 300' SOUTH OF LILLY CHAPEL PKWY.

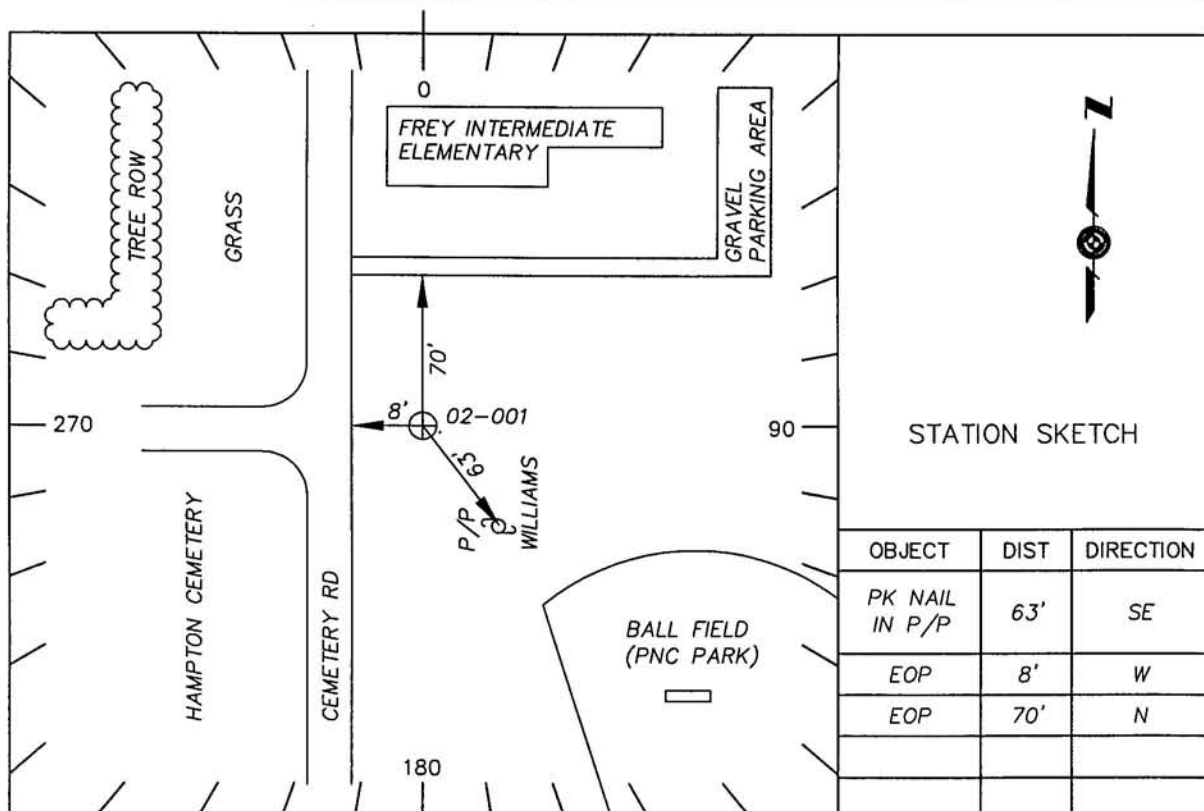

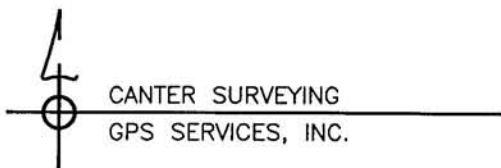

PROJECT: 22010
MADISON CO. ENGINEER
222 GARFIELD AVE
LONDON, OH 43140

REPORT ON ESTABLISHMENT OF SURVEY MARK


DESCRIPTION OF MARK	DATE	QUAD: X	STATE: OHIO
02-003	4-1-02	INDEX:	COUNTY: MADISON
WGS 84		GRID ZONE: OH SOUTH	HEIGHT
LAT: N40°5'18.851359"		N 761733.9684	ELLIPSOID: 260.3964 m
LONG: W83°18'35.134810"		E 1741929.1278	ORTHO: 963.53 FT.
HORIZONTAL DATUM: NAD 83 (95)		PAF: X	GRID METERS
VERTICAL DATUM: NAVD 88		GEOID MODEL: GEOID 99	N 232176.9779
		E 530941.0600	ORTHO: 293.68 m.

NOTE: ALL
ELEVATIONS ARE
BASED ON GPS

DETAILED STATION DESCRIPTION

BRASS TABLET IN POURED IN PLACE MONUMENT.

SURVEY MONUMENT IS 15' EAST OF LAYAFETTE PLAIN CITY ROAD, AT SHEKINAH CHRISTIAN SCHOOL.

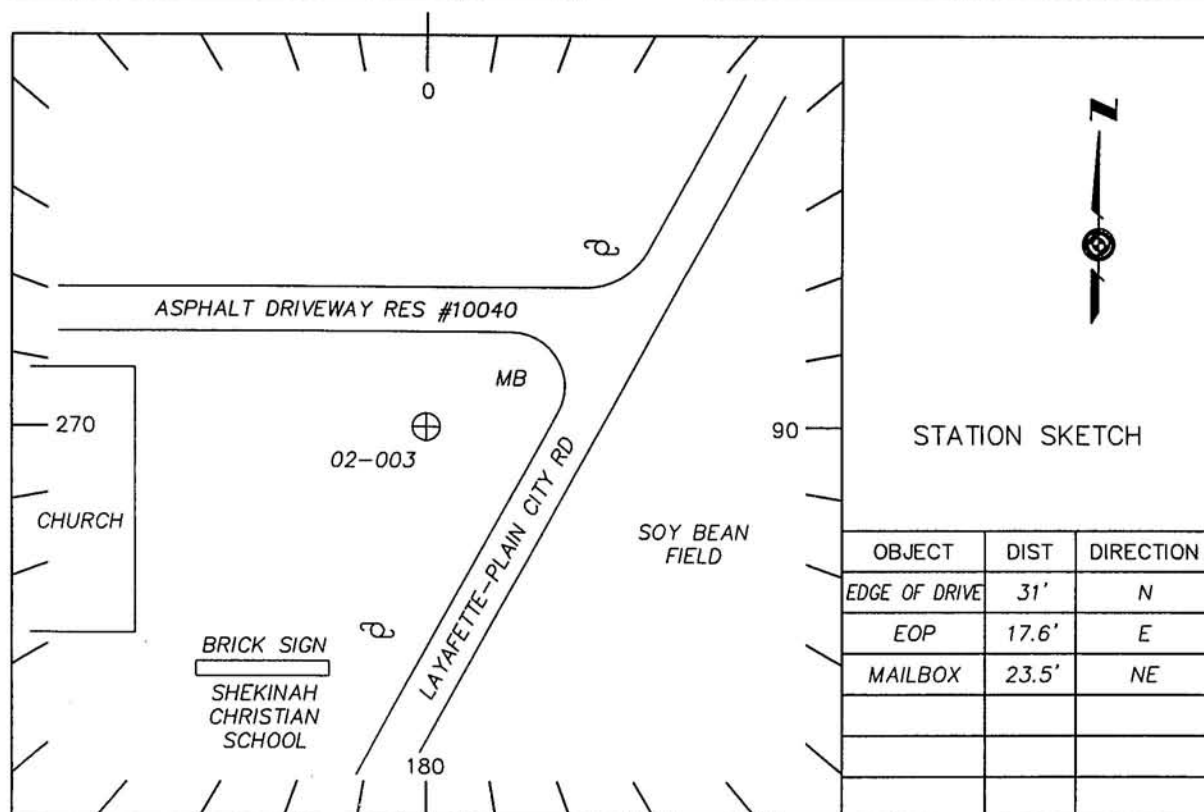



CANTER SURVEYING
GPS SERVICES, INC.

PROJECT: 22010
MADISON CO. ENGINEER
222 GARFIELD AVE
LONDON, OH 43140

REPORT ON ESTABLISHMENT OF SURVEY MARK


DESCRIPTION OF MARK	DATE	QUAD: X	STATE: OHIO
02-004	3-18-02	INDEX:	COUNTY: MADISON
WGS 84		GRID ZONE: OH SOUTH	HEIGHT
LAT: N39°54'2.623674"		N 693685.9412	ELLIPSOID: 289.3773 m
LONG: W83°26'51.659506"		E 1702621.2821	ORTHO: 1057.23 FT.
HORIZONTAL DATUM: NAD 83 (95)		PAF: X	GRID METERS
VERTICAL DATUM: NAVD 88		GEOID MODEL: GEOID 99	N 211435.8977
		E 518960.0047	ORTHO: 322.24 m.

NOTE: ALL
ELEVATIONS ARE
BASED ON GPS

DETAILED STATION DESCRIPTION

BRASS TABLET IN POURED IN PLACE MONUMENT.

SURVEY MONUMENT IS 20' EAST OF SR 38 APPROXIMATELY 45' SOUTH OF GARFIELD AVENUE.

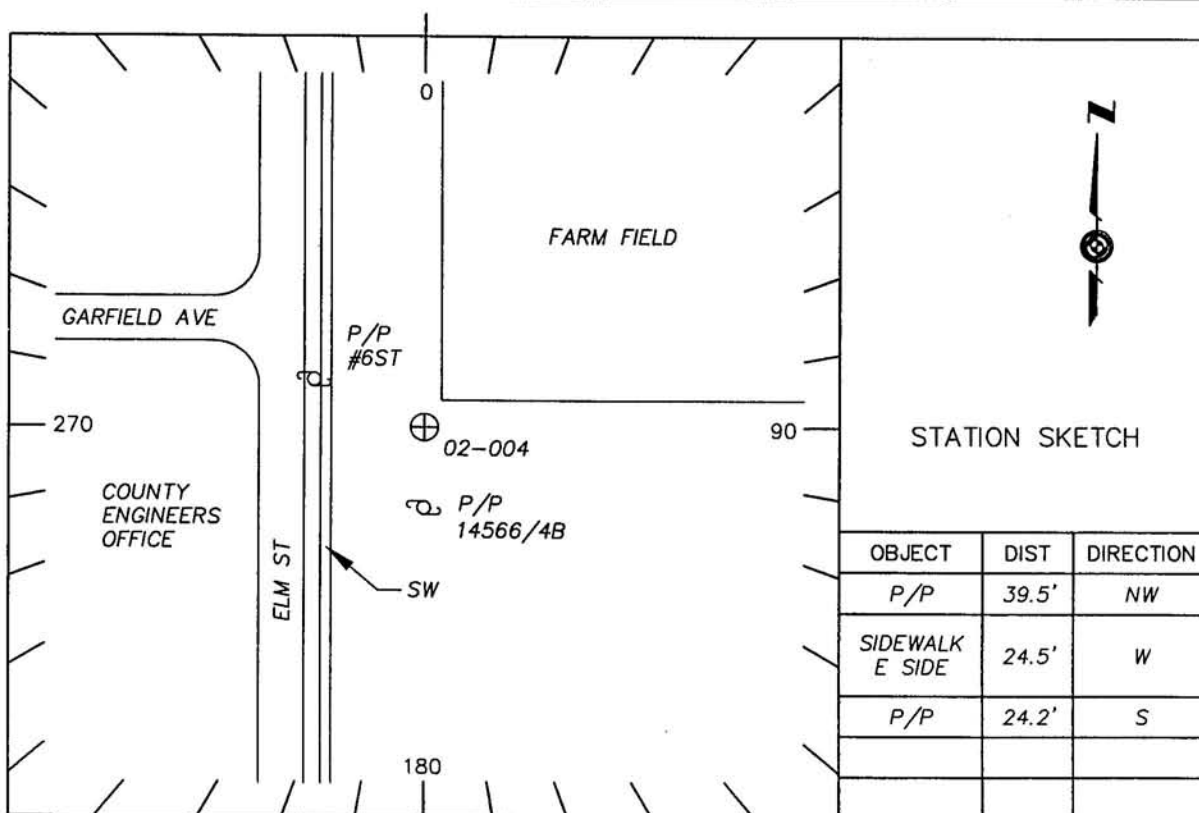



CANTER SURVEYING
GPS SERVICES, INC.

PROJECT: 22010
MADISON CO. ENGINEER
222 GARFIELD AVE
LONDON, OH 43140

REPORT ON ESTABLISHMENT OF SURVEY MARK


DESCRIPTION OF MARK	DATE	QUAD: X	STATE: OHIO
02-005	4-1-02	INDEX:	COUNTY: MADISON
WGS 84		GRID ZONE: OH SOUTH	HEIGHT
LAT: N39°43'19.315353"		N 628117.0901	ELLIPSOID: 243.1441 m
LONG: W83°16'4.790097"		E 1752478.3788	ORTHO: 905.19 FT.
HORIZONTAL DATUM: NAD 83 (95)		PAF: X	GRID METERS
VERTICAL DATUM: NAVD 88		GEOID MODEL: GEOID 99	N 191450.4720
			E 534156.4782
			ORTHO: 275.90 m.

NOTE: ALL
ELEVATIONS ARE
BASED ON GPS

DETAILED STATION DESCRIPTION

BRASS TABLET IN POURED IN PLACE MONUMENT IN THE VILLAGE OF MT. STERLING.

SURVEY MONUMENT IS LOCATED 20.4' WEST OF CL OF SR 56 AND 68.7' EAST OF CL NEW ST ALSO 59.1' NORTH OF STOP SIGN.

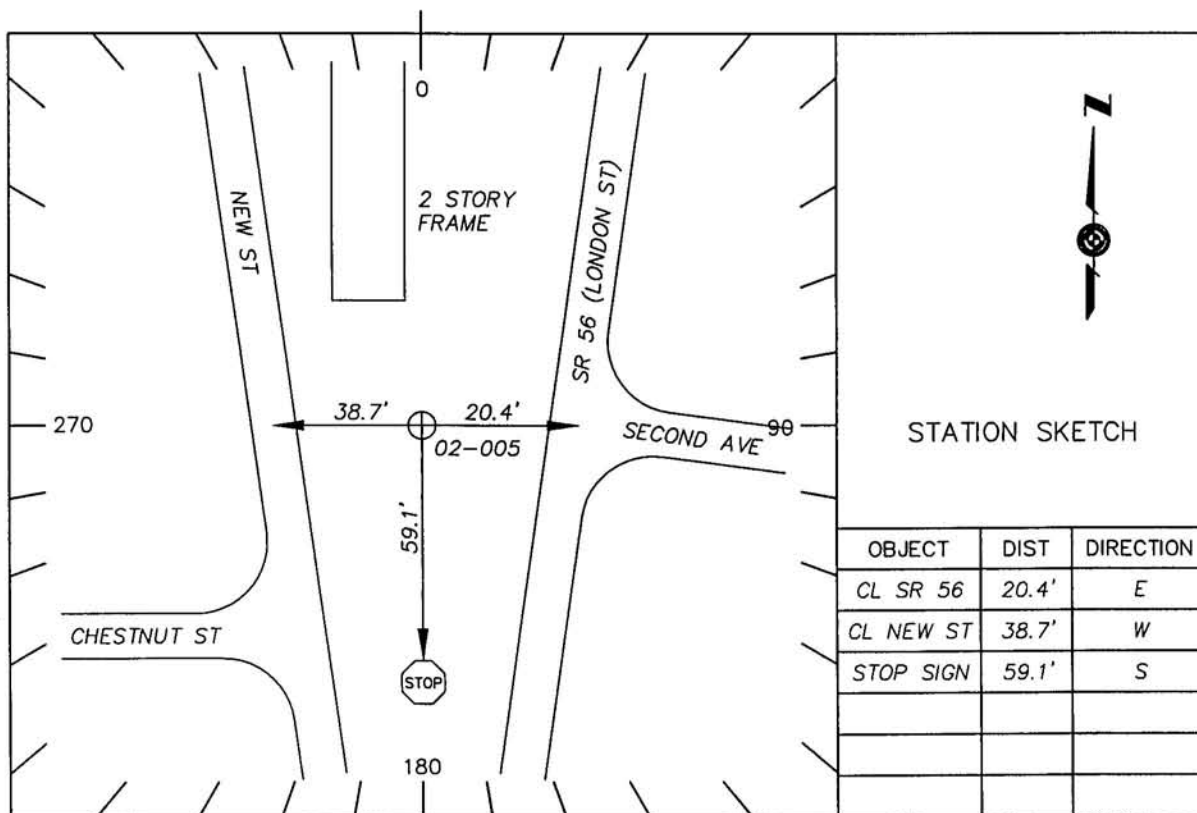



CANTER SURVEYING
GPS SERVICES, INC.

PROJECT: 22010
MADISON CO. ENGINEER
222 GARFIELD AVE
LONDON, OH 43140

REPORT ON ESTABLISHMENT OF SURVEY MARK


DESCRIPTION OF MARK	DATE	QUAD: X	STATE: OHIO
02-006	3-20-02	INDEX:	COUNTY: MADISON
WGS 84		GRID ZONE: OH SOUTH	HEIGHT
LAT: N39°49'58.295664"	N	668752.8562	ELLIPSOID: 269.5475 m
LONG: W83°22'22.023511"	E	1723395.0188	ORTHO: 991.65 FT.
HORIZONTAL DATUM: NAD 83 (95)	PAF: X		GRID METERS
VERTICAL DATUM: NAVD 88	GEOID MODEL: GEOID 99		N 203836.2782
		E 525291.8523	ORTHO: 302.25 m.

NOTE: ALL
ELEVATIONS ARE
BASED ON GPS

DETAILED STATION DESCRIPTION

BRASS TABLET IN POURED IN PLACE MONUMENT.

SURVEY MONUMENT IS 9' WEST OF SR 56, ON LINE WITH GREG MILL ROAD.

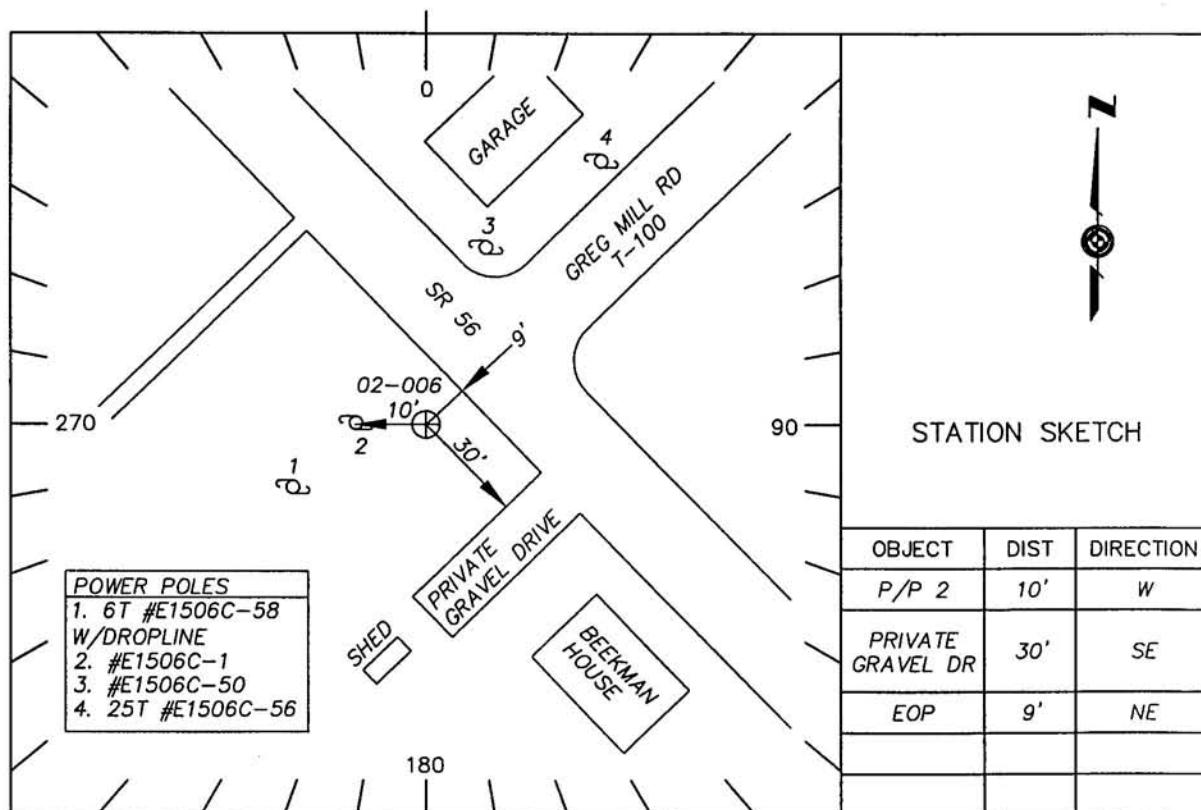



CANTER SURVEYING
GPS SERVICES, INC.

PROJECT: 22010
MADISON CO. ENGINEER
222 GARFIELD AVE
LONDON, OH 43140

REPORT ON ESTABLISHMENT OF SURVEY MARK


DESCRIPTION OF MARK	DATE	QUAD: X	STATE: OHIO
02-007	4-1-02	INDEX:	COUNTY: MADISON
WGS 84		GRID ZONE: OH SOUTH	HEIGHT
LAT: N39°44'14.840261"		N 634733.8640	ELLIPSOID: 304.8340 m
LONG: W83°36'34.720687"		E 1656453.2188	ORTHO: 1107.68 FT.
HORIZONTAL DATUM: NAD 83 (95)		PAF: X	GRID METERS
VERTICAL DATUM: NAVD 88		GEOID MODEL: GEOID 99	N 193467.2687
			E 504887.9509
			ORTHO: 337.62 m.

NOTE: ALL
ELEVATIONS ARE
BASED ON GPS

DETAILED STATION DESCRIPTION

BRASS TABLET IN POURED IN PLACE MONUMENT IN THE VILLAGE OF SOUTH SOLON.

SURVEY MONUMENT IS 41.3' NORTH OF CL SR 323 AND 27.6' EAST OF RAILROAD STREET AND 24.6'
WEST OF CL R/R.

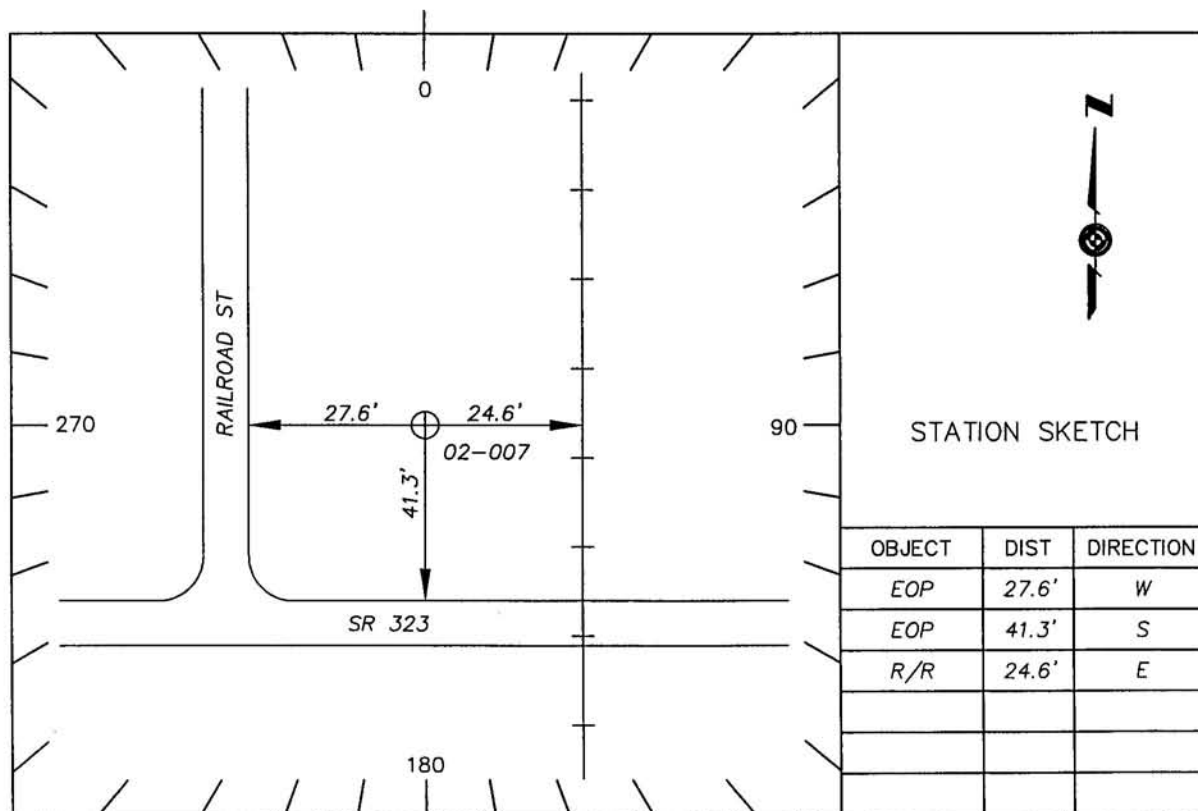



CANTER SURVEYING
GPS SERVICES, INC.

PROJECT: 22010
MADISON CO. ENGINEER
222 GARFIELD AVE
LONDON, OH 43140

REPORT ON ESTABLISHMENT OF SURVEY MARK


DESCRIPTION OF MARK	DATE	QUAD: X	STATE: OHIO
02-008	4-1-02	INDEX:	COUNTY: MADISON
WGS 84		GRID ZONE: OH SOUTH	HEIGHT
LAT: N39°44'2.542947"		N 633057.8357	ELLIPSOID: 292.7315 m
LONG: W83°28'36.192356"		E 1693818.3450	ORTHO: 1067.37 FT.
HORIZONTAL DATUM: NAD 83 (95)		PAF: X	GRID METERS
VERTICAL DATUM: NAVD 88		GEOID MODEL: GEOID 99	N 192956.4142
			E 516276.8641
			ORTHO: 325.34 m.

NOTE: ALL
ELEVATIONS ARE
BASED ON GPS

DETAILED STATION DESCRIPTION

BRASS TABLET IN POURED IN PLACE MONUMENT IN THE VILLAGE OF MIDWAY.

SURVEY MONUMENT IS 24.3' EAST OF CL SR 38, 4.5' WEST OF CL SIDEWALK, AND 30.8' NORTHWEST CORNER OF THE RANGE TWP FIRE DEPARTMENT BUILDING.

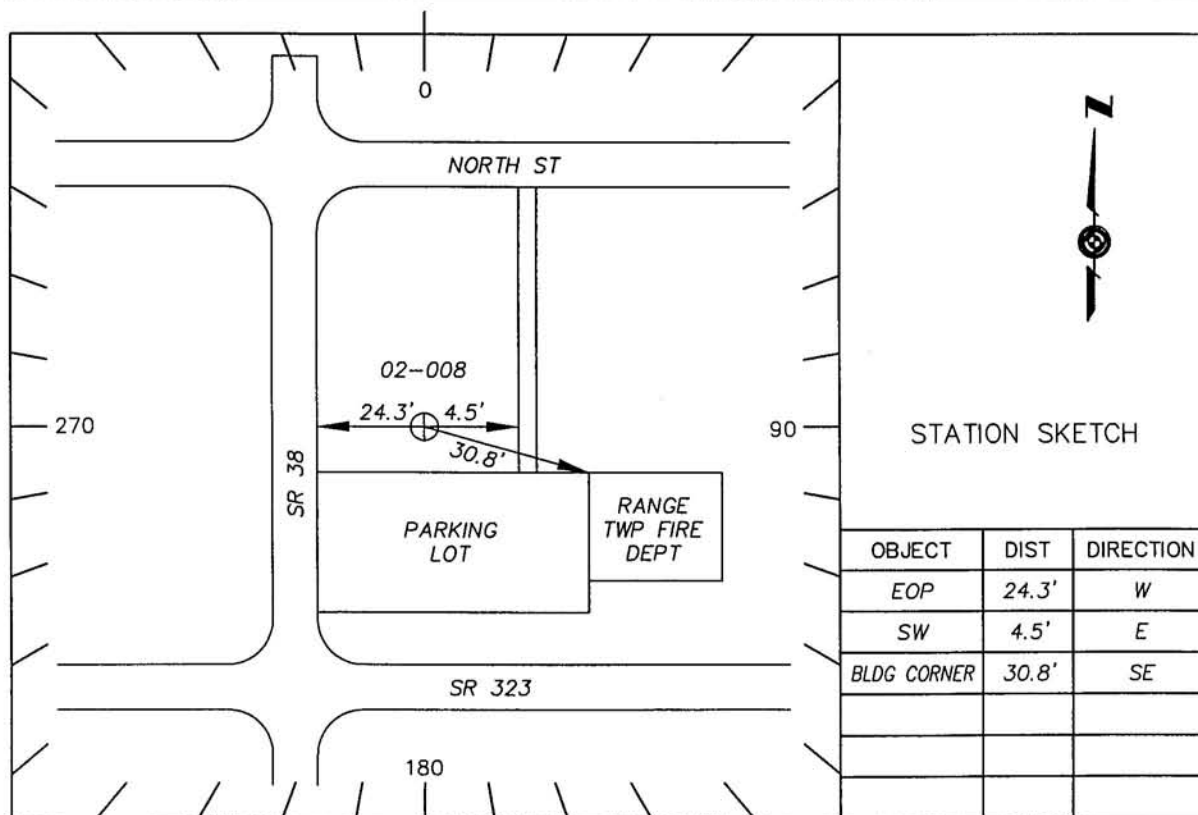



CANTER SURVEYING
GPS SERVICES, INC.

PROJECT: 22010
MADISON CO. ENGINEER
222 GARFIELD AVE
LONDON, OH 43140

REPORT ON ESTABLISHMENT OF SURVEY MARK


DESCRIPTION OF MARK	DATE	QUAD: X	STATE: OHIO
02-009	3-20-02	INDEX:	COUNTY: MADISON
WGS 84		GRID ZONE: OH SOUTH	HEIGHT
LAT: N40°2'36.810993"		N 745451.8884	ELLIPSOID: 264.4139 m
LONG: W83°21'14.951855"		E 1729353.0424	ORTHO: 976.35 FT.
HORIZONTAL DATUM: NAD 83 (95)		PAF: X	GRID METERS
VERTICAL DATUM: NAVD 88		GEOID MODEL: GEOID 99	N 227214.1900
			E 527107.8616
			ORTHO: 297.59 m.

NOTE: ALL
ELEVATIONS ARE
BASED ON GPS

DETAILED STATION DESCRIPTION

BRASS TABLET IN POURED IN PLACE MONUMENT.

SURVEY MONUMENT IS 5' SOUTH OF PRICE HILLIARDS ROAD, APPROXIMATELY 25' EAST OF
LAFAYETTE-PLAIN CITY ROAD.

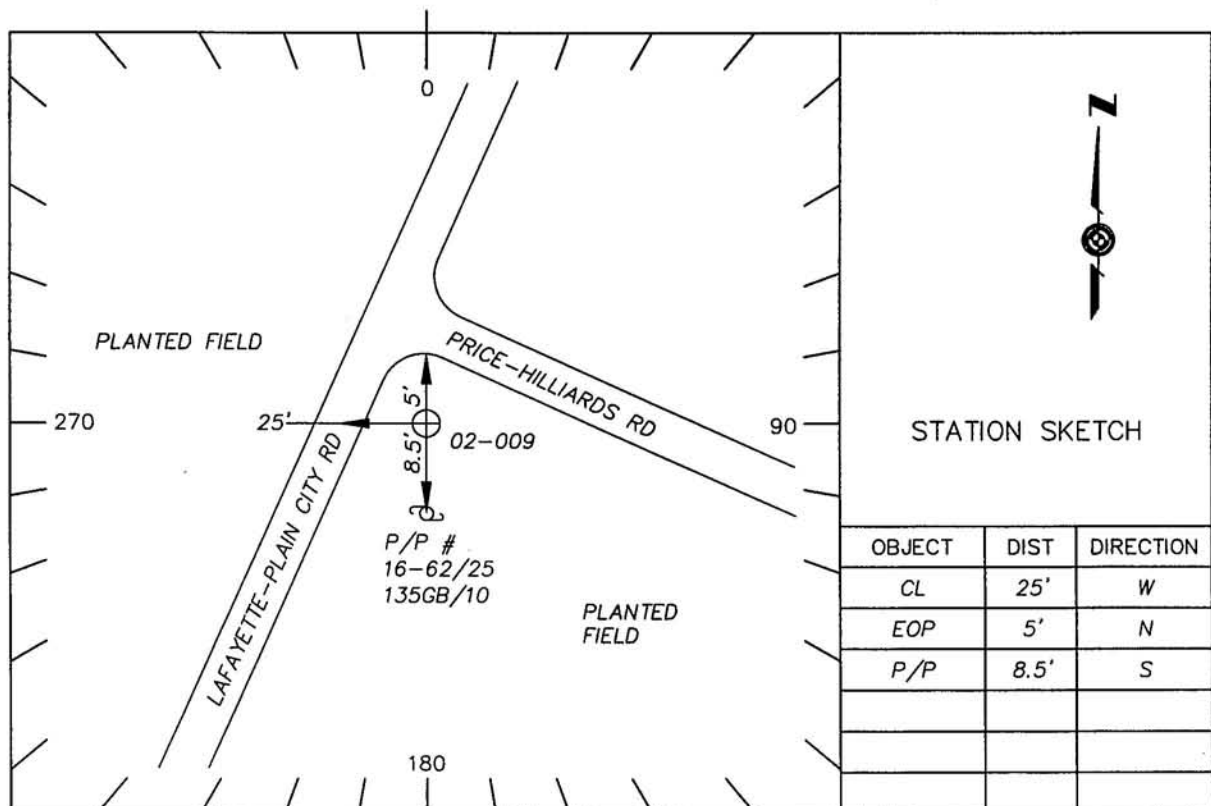



CANTER SURVEYING
GPS SERVICES, INC.

PROJECT: 22010
MADISON CO. ENGINEER
222 GARFIELD AVE
LONDON, OH 43140

REPORT ON ESTABLISHMENT OF SURVEY MARK


DESCRIPTION OF MARK	DATE	QUAD: X	STATE: OHIO
02-010	4-1-02	INDEX:	COUNTY: MADISON
WGS 84		GRID ZONE: OH SOUTH	HEIGHT
LAT: N39°50'10.123755"		N 670214.5216	ELLIPSOID: 293.5368 m
LONG: W83°27'55.658138"		E 1697382.3755	ORTHO: 1070.38 FT.
HORIZONTAL DATUM: NAD 83 (95)		PAF: X	GRID METERS
VERTICAL DATUM: NAVD 88		GEOID MODEL: GEOID 99	N 204281.7947
		E 517363.1828	ORTHO: 326.25 m.

NOTE: ALL
ELEVATIONS ARE
BASED ON GPS

DETAILED STATION DESCRIPTION

BRASS TABLET IN POURED IN PLACE MONUMENT.

SURVEY MONUMENT IS 30' WEST OF SR 38, IN VILLAGE OF NEWPORT.

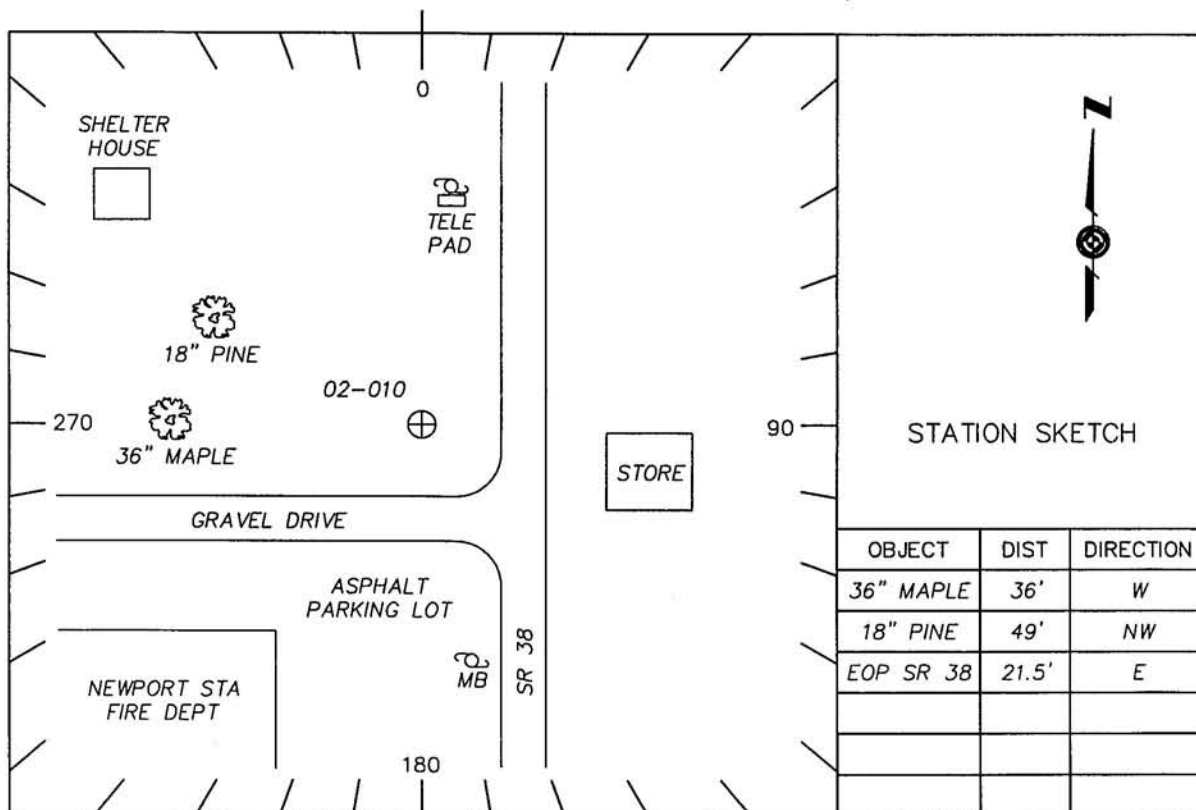



CANTER SURVEYING
GPS SERVICES, INC.

PROJECT: 22010
MADISON CO. ENGINEER
222 GARFIELD AVE
LONDON, OH 43140

REPORT ON ESTABLISHMENT OF SURVEY MARK


DESCRIPTION OF MARK	DATE	QUAD: X	STATE: OHIO
02-011	3-18-02	INDEX:	COUNTY: MADISON
WGS 84		GRID ZONE: OH SOUTH	HEIGHT
LAT: N39°56'1.695438"		N 705867.3675	ELLIPSOID: 302.9461 m
LONG: W83°29'31.311506"		E 1690312.0773	ORTHO: 1102.01 FT.
HORIZONTAL DATUM: NAD 83 (95)		PAF: X	GRID METERS
VERTICAL DATUM: NAVD 88		GEOID MODEL: GEOID 99	N 215148.8039
			E 515208.1516
			ORTHO: 335.89m.

NOTE: ALL
ELEVATIONS ARE
BASED ON GPS

DETAILED STATION DESCRIPTION

BRASS TABLET IN POURED IN PLACE MONUMENT.

SURVEY MONUMENT IS 30' WEST OF SR 56, APPROXIMATELY 25' NORTH OF OLD US 40 (TWP RD 1052).

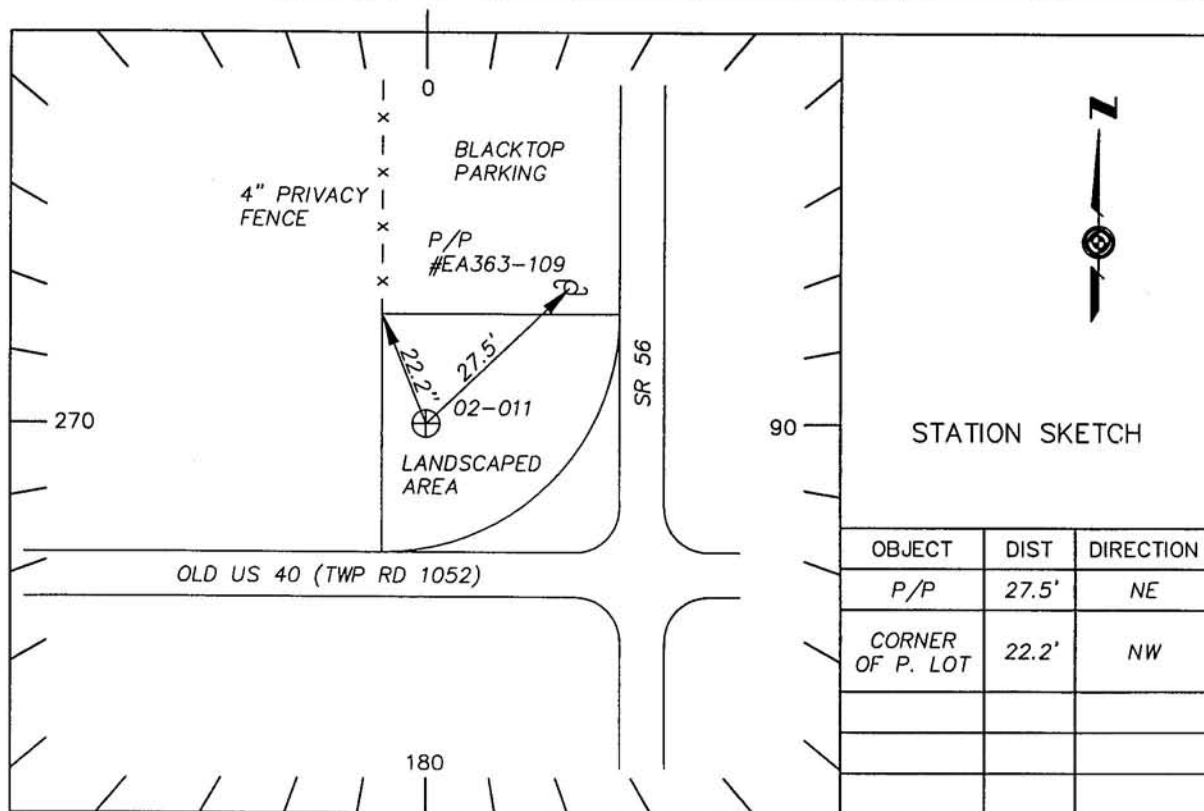



CANTER SURVEYING
GPS SERVICES, INC.

PROJECT: 22010
MADISON CO. ENGINEER
222 GARFIELD AVE
LONDON, OH 43140

REPORT ON ESTABLISHMENT OF SURVEY MARK


DESCRIPTION OF MARK	DATE	QUAD: X	STATE: OHIO
02-012	4-1-02	INDEX:	COUNTY: MADISON
WGS 84		GRID ZONE: OH SOUTH	HEIGHT
LAT: N39°50'15.209797"	N	670231.4978	ELLIPSOID: 264.6562 m
LONG: W83°16'56.487212"	E	1748803.8187	ORTHO: 975.95 FT.
HORIZONTAL DATUM: NAD 83 (95)	PAF: X		GRID METERS
VERTICAL DATUM: NAVD 88	GEOID MODEL: GEOID 99		N 204286.9691
		E 533036.4700	ORTHO: 297.47 m.

NOTE: ALL
ELEVATIONS ARE
BASED ON GPS

DETAILED STATION DESCRIPTION

BRASS TABLET IN POURED IN PLACE MONUMENT IN THE VILLAGE OF BIG PLAIN.

SURVEY MONUMENT IS 16' NORTH OF BIG PLAIN-CIRCLEVILLE ROAD, APPROXIMATELY 1.1 MILES WEST OF KIOUSVILLE-GEORGESVILLE ROAD.

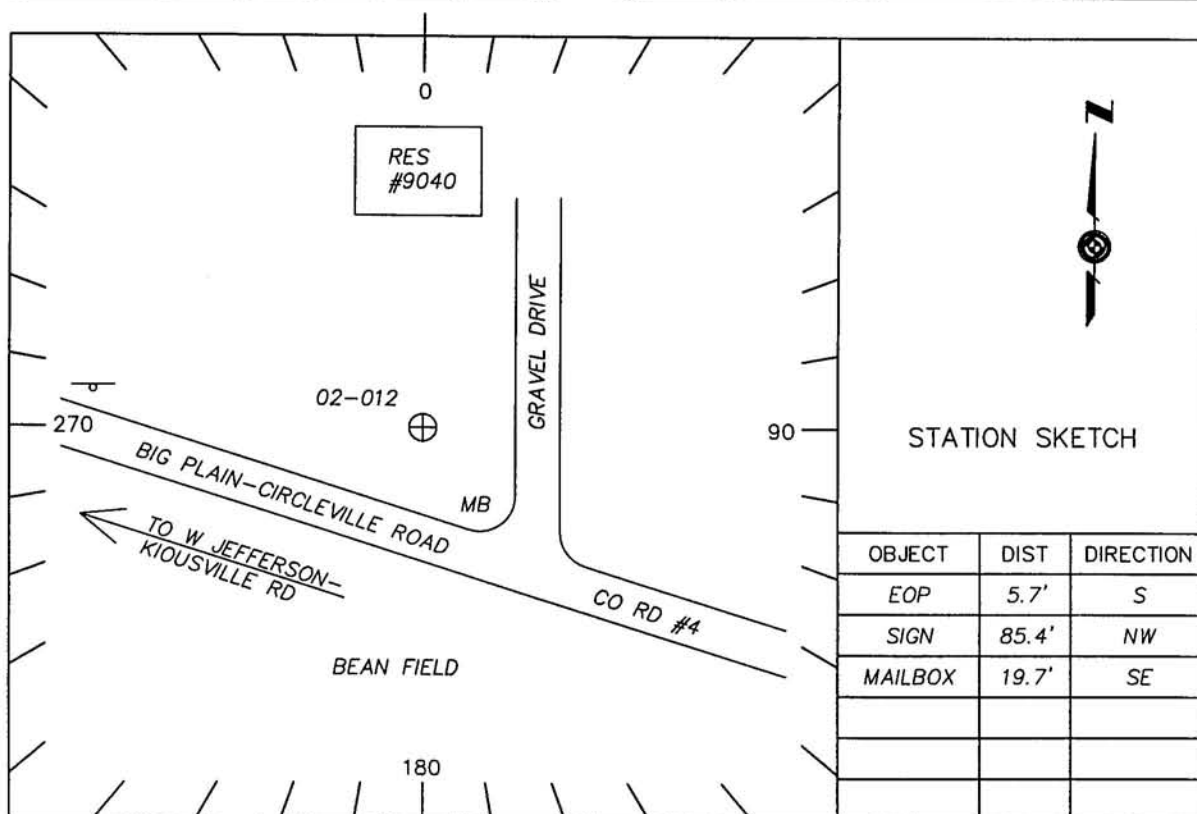



CANTER SURVEYING
GPS SERVICES, INC.

PROJECT: 22010
MADISON CO. ENGINEER
222 GARFIELD AVE
LONDON, OH 43140

REPORT ON ESTABLISHMENT OF SURVEY MARK


DESCRIPTION OF MARK	DATE	QUAD: X	STATE: OHIO
02-013	3-18-02	INDEX:	COUNTY: MADISON
WGS 84		GRID ZONE: OH SOUTH	HEIGHT
LAT: N39°53'8.987004"		N 688264.6683	ELLIPSOID: 286.9973 m
LONG: W83°26'58.644621"		E 1702019.8602	ORTHO: 1049.28 FT.
HORIZONTAL DATUM: NAD 83 (95)		PAF: X	GRID METERS
VERTICAL DATUM: NAVD 88		GEOID MODEL: GEOID 99	N 209783.4905
		E 518776.6909	ORTHO: 319.82 m.

NOTE: ALL
ELEVATIONS ARE
BASED ON GPS

DETAILED STATION DESCRIPTION

BRASS TABLET IN POURED IN PLACE MONUMENT IN THE CITY OF LONDON.

SURVEY MONUMENT IS 22' EAST OF OAK STREET, APPROXIMATELY 40' NORTH OF HIGH STREET.

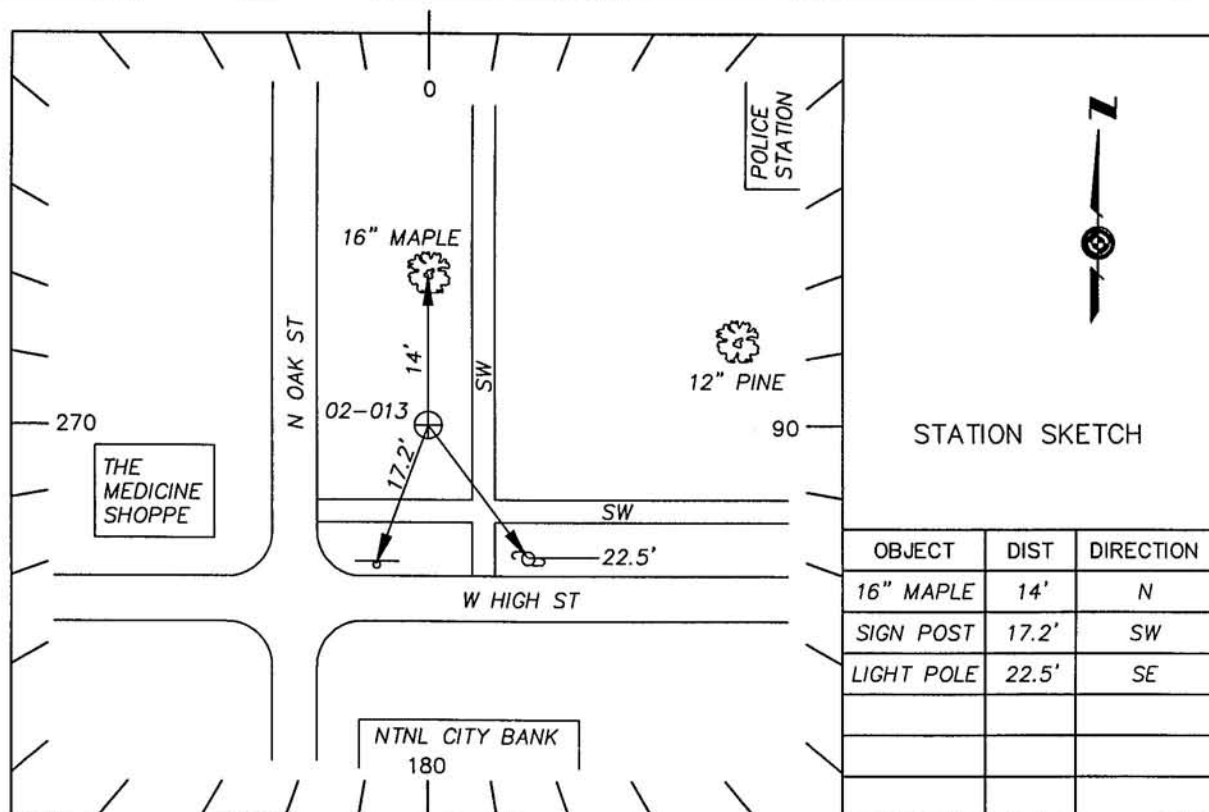



CANTER SURVEYING
GPS SERVICES, INC.

PROJECT: 22010
MADISON CO. ENGINEER
222 GARFIELD AVE
LONDON, OH 43140

REPORT ON ESTABLISHMENT OF SURVEY MARK


DESCRIPTION OF MARK	DATE	QUAD: X	STATE: OHIO
02-014	3-19-02	INDEX:	COUNTY: MADISON
WGS 84		GRID ZONE: OH SOUTH	HEIGHT
LAT: N40°4'36.956910"		N 757895.0281	ELLIPSOID: 274.4528 m
LONG: W83°27'21.816410"		E 1700950.7695	ORTHO: 1009.41 FT.
HORIZONTAL DATUM: NAD 83 (95)		PAF: X	GRID METERS
VERTICAL DATUM: NAVD 88		GEOID MODEL: GEOID 99	N 231006.8666
			E 518450.8314
			ORTHO: 307.67 m.


NOTE: ALL
ELEVATIONS ARE
BASED ON GPS

DETAILED STATION DESCRIPTION

BRASS TABLET IN POURED IN PLACE MONUMENT IN THE VILLAGE OF ROSEDALE.

SURVEY MONUMENT IS 20' EAST OF ROSEDALE ROAD, APPROXIMATELY 500' SOUTH OF ROSEDALE MILFORD CENTER.

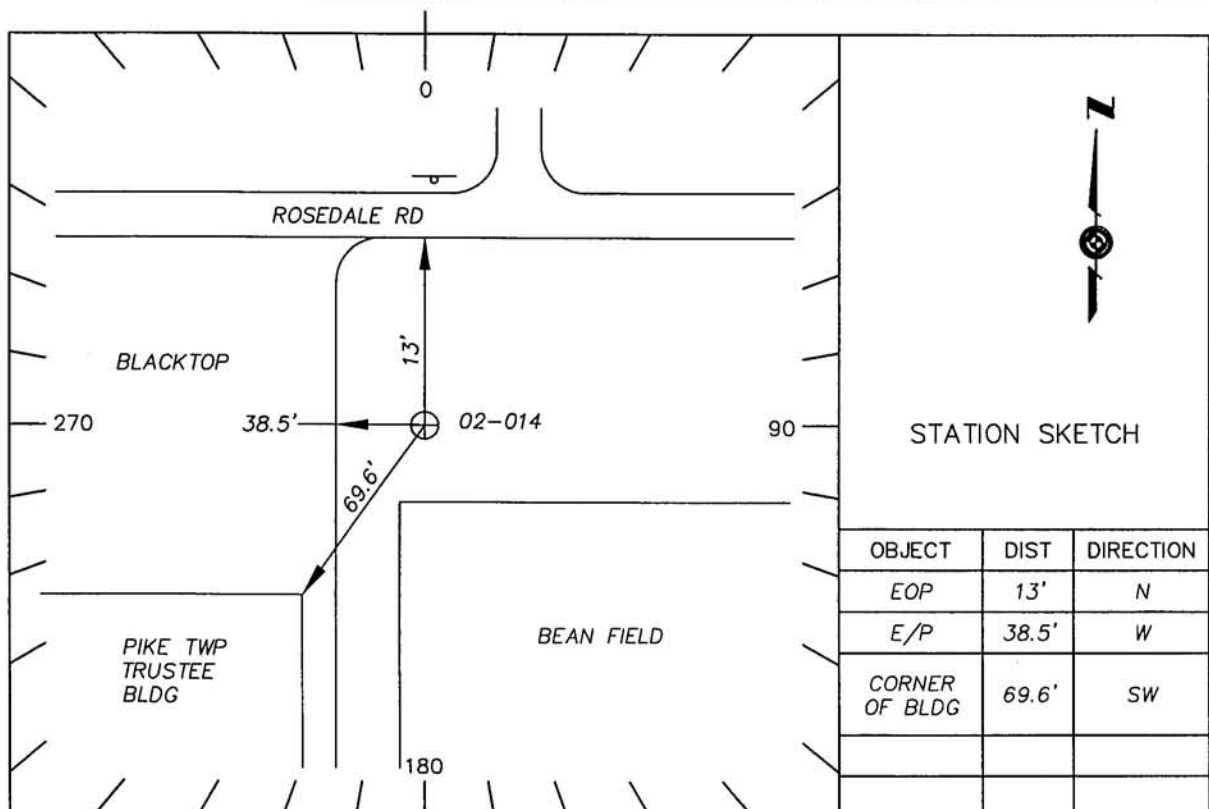



PROJECT: 22010
MADISON CO. ENGINEER
222 GARFIELD AVE
LONDON, OH 43140

REPORT ON ESTABLISHMENT OF SURVEY MARK


DESCRIPTION OF MARK	DATE	QUAD: X	STATE: OHIO	NOTE: ALL ELEVATIONS ARE BASED ON GPS
02-016	3-20-02	INDEX:	COUNTY: MADISON	
WGS 84		GRID ZONE: OH SOUTH	HEIGHT	
LAT: N39°57'6.066968"	N	712047.3823	ELLIPSOID: 271.5723 m	
LONG: W83°22'37.915789"	E	1722575.8039	ORTHO: 999.24 FT.	
HORIZONTAL DATUM: NAD 83 (95)	PAF: X		GRID METERS	
VERTICAL DATUM: NAVD 88		GEOID MODEL: GEOID 99	N 217032.4762	
			E 525042.1551	ORTHO: 304.57 m.

NOTE: ALL
ELEVATIONS ARE
BASED ON GPS

DETAILED STATION DESCRIPTION

BRASS TABLET IN POURED IN PLACE MONUMENT.

SURVEY MONUMENT IS IN MEDIAN LANDSCAPING AT NORTHEAST CORNER OF COUNTY ENGINEER'S OFFICE
PARKING AREA UNDER CONSTRUCTION.

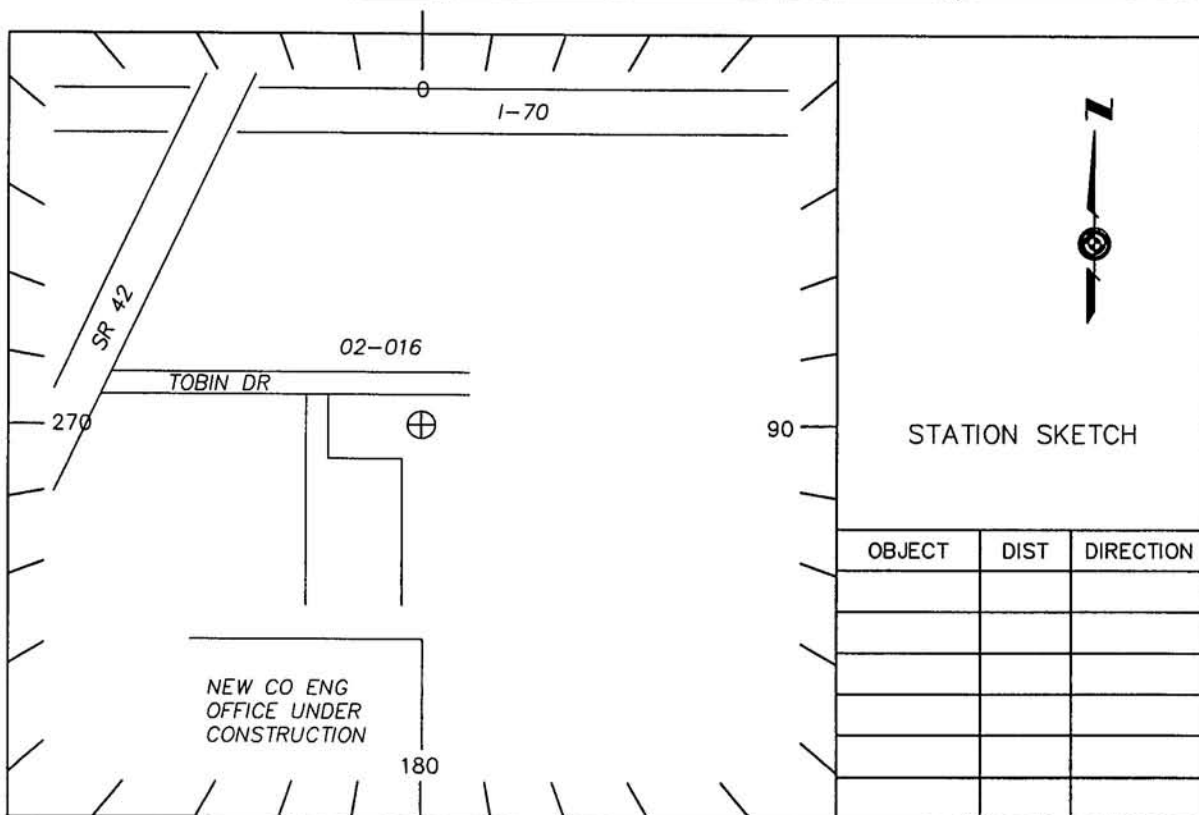



CANTER SURVEYING
GPS SERVICES, INC.

PROJECT: 22010
MADISON CO. ENGINEER
222 GARFIELD AVE
LONDON, OH 43140

REPORT ON ESTABLISHMENT OF SURVEY MARK


DESCRIPTION OF MARK	DATE	QUAD: X	STATE: OHIO
02-017	4-1-02	INDEX:	COUNTY: MADISON
WGS 84		GRID ZONE: OH SOUTH	HEIGHT
LAT: N39°47'21.481296"	N	653179.5122	ELLIPSOID: 299.3662 m
LONG: W83°28'28.899271"	E	1694605.3243	ORTHO: 1089.32 FT.
HORIZONTAL DATUM: NAD 83 (95)	PAF: X		GRID METERS
VERTICAL DATUM: NAVD 88	GEOID MODEL: GEOID 99		N 199089.5135
		E 516516.7359	ORTHO: 332.02 m.

NOTE: ALL
ELEVATIONS ARE
BASED ON GPS

DETAILED STATION DESCRIPTION

BRASS TABLET IN POURED IN PLACE MONUMENT.

SURVEY MONUMENT IS 28' WEST OF SR 38, APPROXIMATELY 35' SOUTH OF LINSON ROAD.

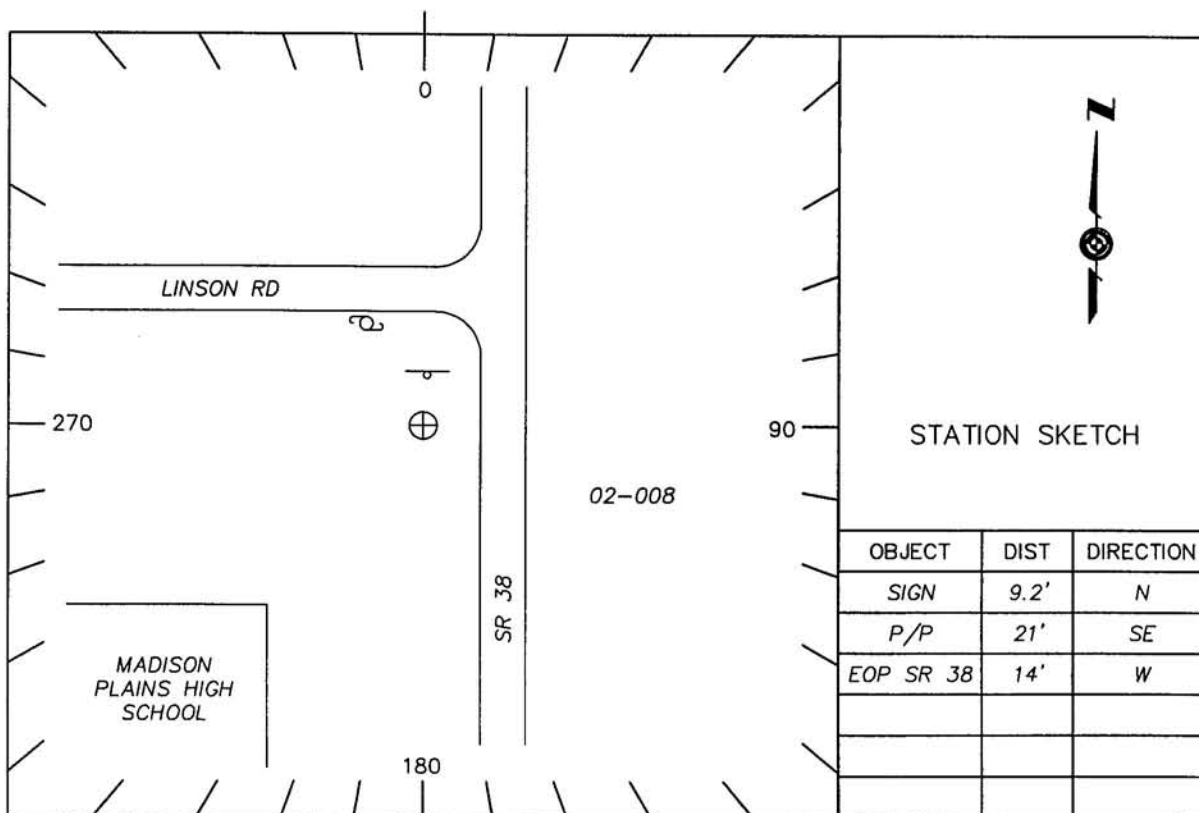



CANTER SURVEYING
GPS SERVICES, INC.

PROJECT: 22010
MADISON CO. ENGINEER
222 GARFIELD AVE.
LONDON, OH 43140

REPORT ON ESTABLISHMENT OF SURVEY MARK


DESCRIPTION OF MARK	DATE	QUAD: X	STATE: OHIO
02-018	3-20-02	INDEX:	COUNTY: MADISON
WGS 84		GRID ZONE: OH SOUTH	HEIGHT
LAT: N39°56'36.801446"	N	708856.2352	ELLIPSOID: 255.3428 m
LONG: W83°17'17.743983"	E	1747482.8159	ORTHO: 946.16 FT.
HORIZONTAL DATUM: NAD 83 (95)	PAF: X		GRID METERS
VERTICAL DATUM: NAVD 88	GEOID MODEL: GEOID 99		N 216059.8126
		E 532633.8276	ORTHO: 288.39 m.

NOTE: ALL
ELEVATIONS ARE
BASED ON GPS

DETAILED STATION DESCRIPTION

BRASS TABLET IN POURED IN PLACE MONUMENT.

SURVEY MONUMENT IS 28' EAST OF INWOOD ROAD, APPROXIMATELY 40' SOUTH OF US 40.

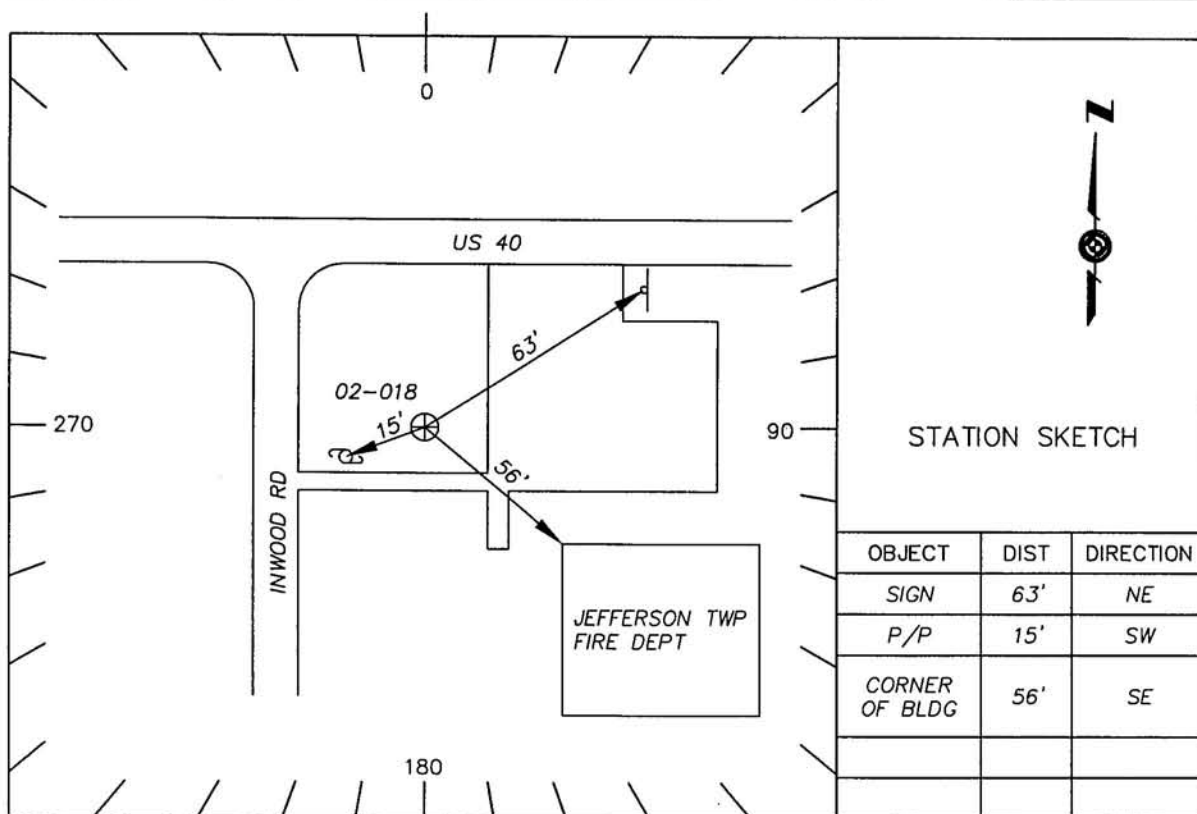



CANTER SURVEYING
GPS SERVICES, INC.

PROJECT: 22010
MADISON CO. ENGINEER
222 GARFIELD AVE
LONDON, OH 43140

REPORT ON ESTABLISHMENT OF SURVEY MARK


DESCRIPTION OF MARK	DATE	QUAD: X	STATE: OHIO
02-019	4-1-02	INDEX:	COUNTY: MADISON
WGS 84		GRID ZONE: OH SOUTH	HEIGHT
LAT: N39°43'9.385716"		N 627119.8301	ELLIPSOID: 243.10 m
LONG: W83°16'15.893656"		E 1751602.2651	ORTHO: 905.00 FT.
HORIZONTAL DATUM: NAD 83 (95)		PAF: X	GRID METERS
			N 191146.5065
VERTICAL DATUM: NAVD 88		GEOID MODEL: GEOID 99	E 533889.4382
			ORTHO: 275.85 m.

NOTE: ALL
ELEVATIONS ARE
BASED ON GPS

DETAILED STATION DESCRIPTION

BRASS TABLET IN POURED IN PLACE MONUMENT IN THE VILLAGE OF MT. STERLING.

SURVEY MONUMENT IS 21.9' NORTH OF CL CHESTNUT ST, 42.1' WEST OF CL ALLEY, AND 20.5' SOUTHWEST OF CON MAN HOLE.

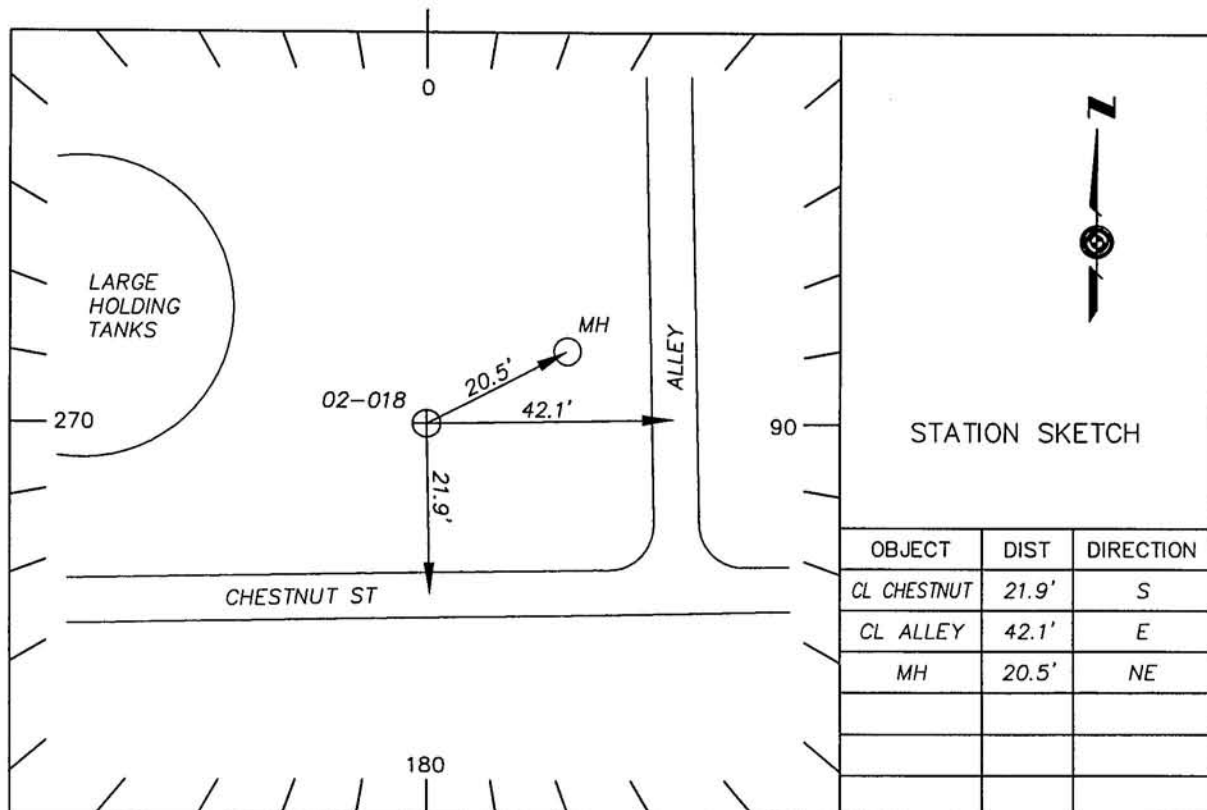



CANTER SURVEYING
GPS SERVICES, INC.

PROJECT: 22010
MADISON CO. ENGINEER
222 GARFIELD AVE
LONDON, OH 43140

REPORT ON ESTABLISHMENT OF SURVEY MARK


DESCRIPTION OF MARK	DATE	QUAD: X	STATE: OHIO
02-020	4-1-02	INDEX:	COUNTY: MADISON
WGS 84		GRID ZONE: OH SOUTH	HEIGHT
LAT: N39°53'43.999354"	N	691490.6679	ELLIPSOID: 265.5093 m
LONG: W83°20'7.720186"	E	1734082.8366	ORTHO: 978.96 FT.
HORIZONTAL DATUM: NAD 83 (95)	PAF: X		GRID METERS
VERTICAL DATUM: NAVD 88	GEOID MODEL: GEOID 99		N 210766.7771
		E 528549.5057	ORTHO: 298.39 m.

NOTE: ALL
ELEVATIONS ARE
BASED ON GPS

DETAILED STATION DESCRIPTION

BRASS TABLET IN POURED IN PLACE MONUMENT.

SURVEY MONUMENT IS 12' NORTH OF SPARLING ROAD, APPROXIMATELY 1.4 MILES WEST OF WILSON ROAD.

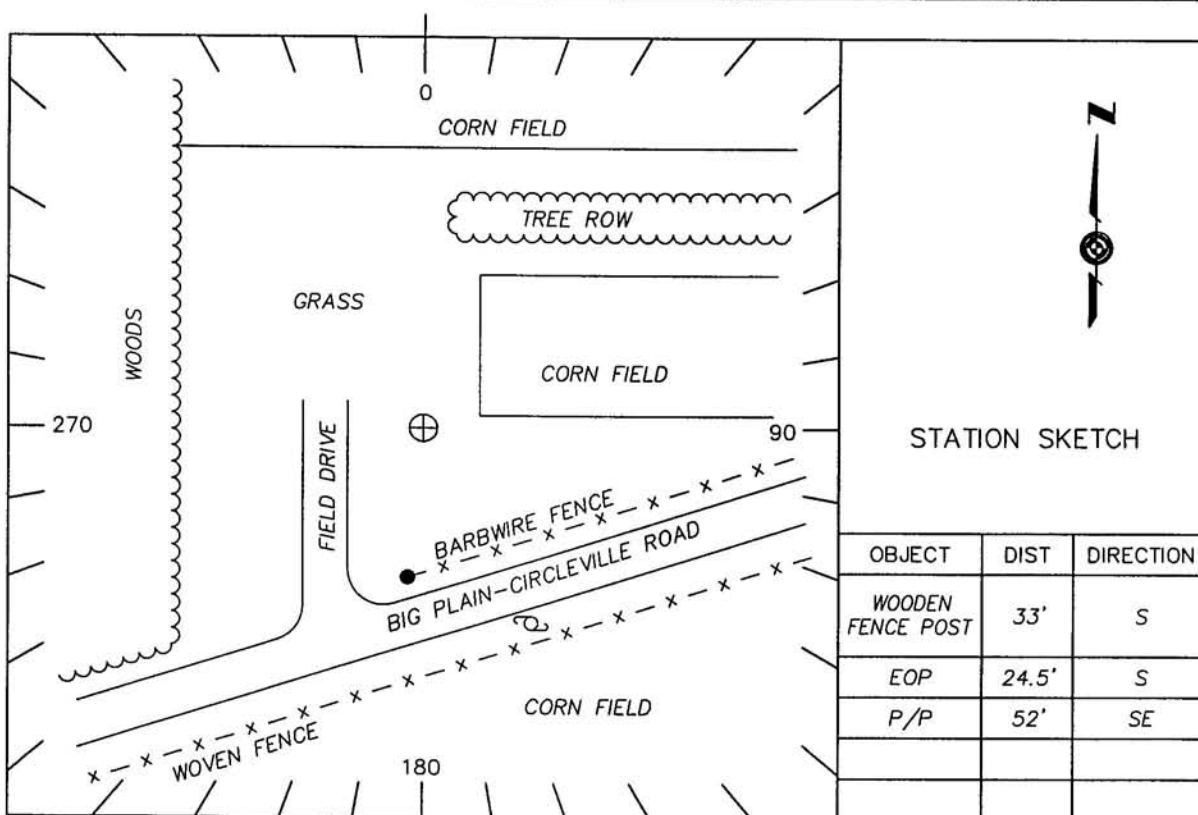



CANTER SURVEYING
GPS SERVICES, INC.

PROJECT: 22010
MADISON CO. ENGINEER
222 GARFIELD AVE
LONDON, OH 43140

REPORT ON ESTABLISHMENT OF SURVEY MARK


DESCRIPTION OF MARK	DATE	QUAD: X	STATE: OHIO
02-021	4-1-02	INDEX:	COUNTY: MADISON
WGS 84		GRID ZONE: OH SOUTH	HEIGHT
LAT: N39°45'31.713797"		N 641677.1354	ELLIPSOID: 255.2187 m
LONG: W83°20'1.924401"		E 1734074.5543	ORTHO: 944.50 FT.
HORIZONTAL DATUM: NAD 83 (95)		PAF: X	GRID METERS
VERTICAL DATUM: NAVD 88		GEOID MODEL: GEOID 99	N 195583.5820
		E 528546.9812	ORTHO: 287.89 m.

NOTE: ALL
ELEVATIONS ARE
BASED ON GPS

DETAILED STATION DESCRIPTION

BRASS TABLET IN POURED IN PLACE MONUMENT.

SURVEY MONUMENT IS 16.4' SOUTH OF CL JUNK ROAD, 6.7' NORTH OF FENCE, AND 17' NORTHWEST OF PLEASANT TOWNSHIP SIGN.

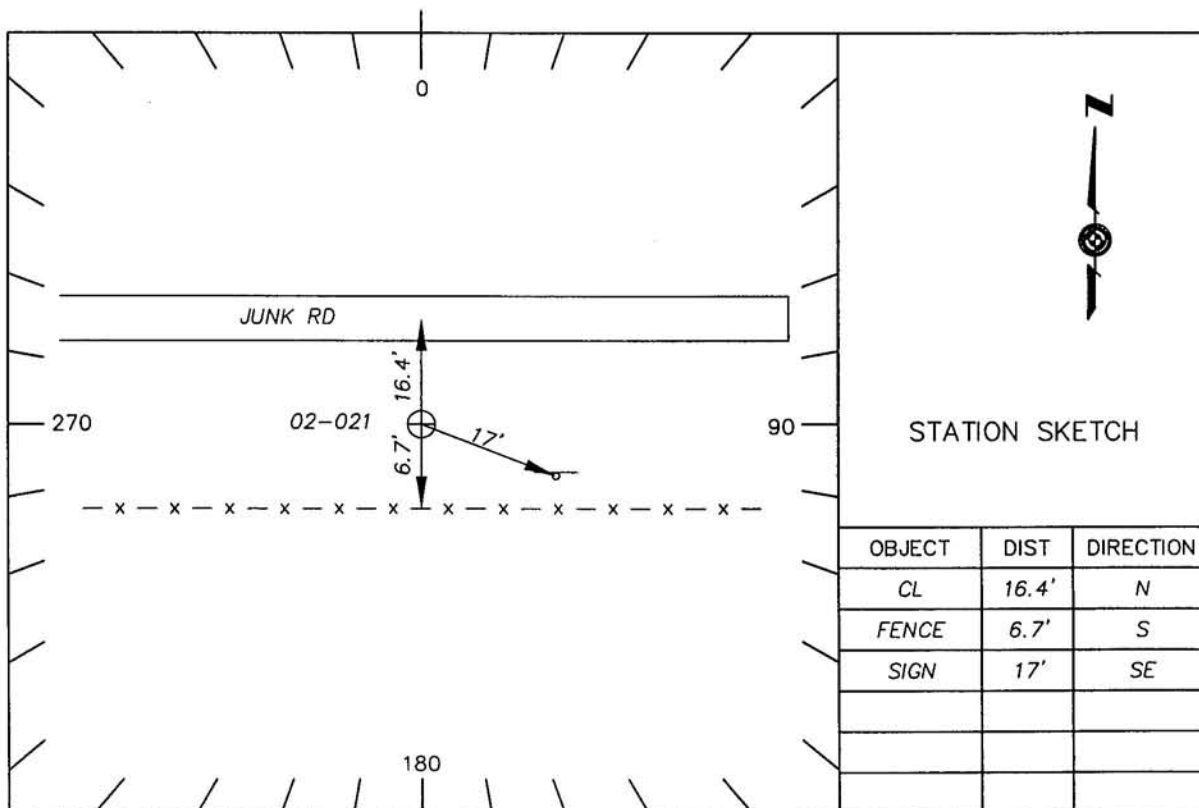



CANTER SURVEYING
GPS SERVICES, INC.

PROJECT: 22010
MADISON CO. ENGINEER
222 GARFIELD AVE
LONDON, OH 43140

REPORT ON ESTABLISHMENT OF SURVEY MARK


DESCRIPTION OF MARK	DATE	QUAD: X	STATE: OHIO
02-022	4-1-02	INDEX:	COUNTY: MADISON
WGS 84		GRID ZONE: OH SOUTH	HEIGHT
LAT: N39°52'15.638957"		N 683201.3876	ELLIPSOID: 316.2753 m
LONG: W83°33'24.778049"		E 1671859.2470	ORTHO: 1145.41 FT.
HORIZONTAL DATUM: NAD 83 (95)		PAF: X	GRID METERS
VERTICAL DATUM: NAVD 88		GEOID MODEL: GEOID 99	N 208240.1994
		E 509583.7176	ORTHO: 349.12 m.

NOTE: ALL
ELEVATIONS ARE
BASED ON GPS

DETAILED STATION DESCRIPTION

BRASS TABLET IN POURED IN PLACE MONUMENT.

SURVEY MONUMENT IS 15' NORTH OF BONNER ROAD AT COUNTY LINE.

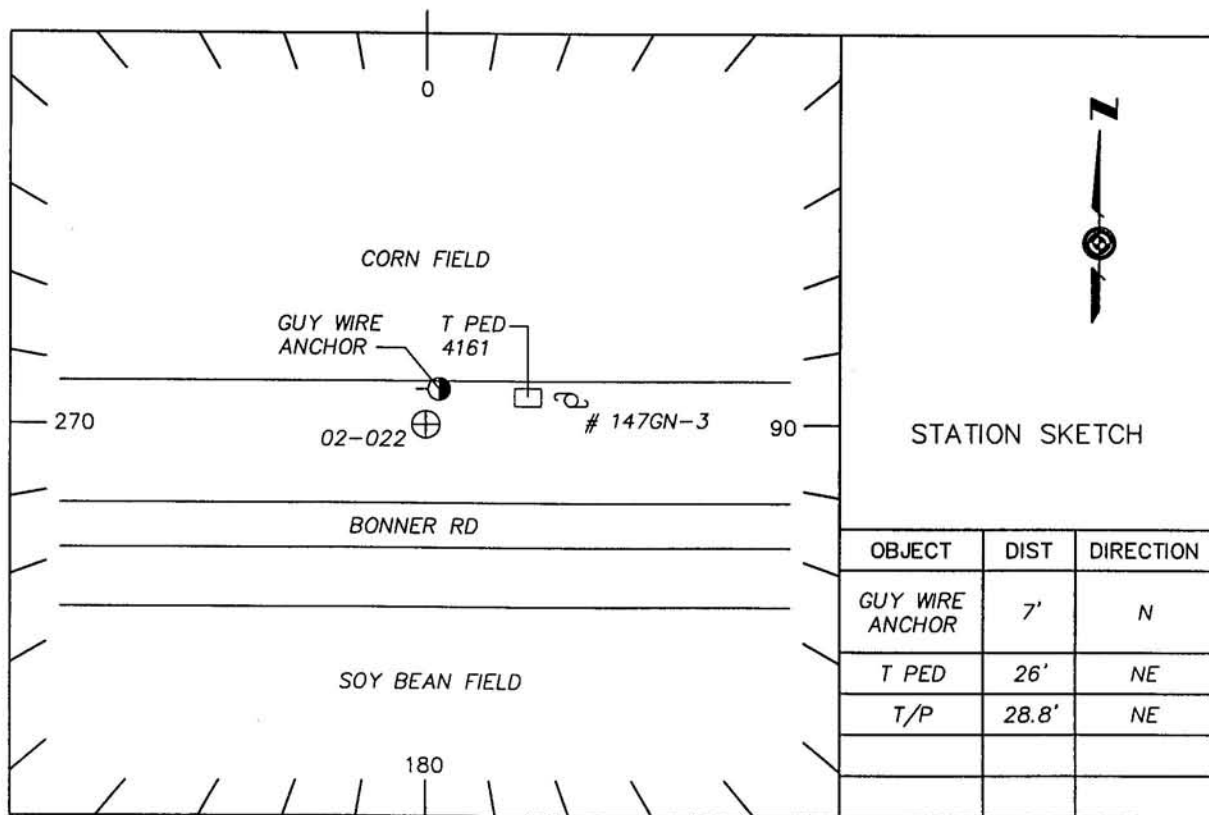



CANTER SURVEYING
GPS SERVICES, INC.

PROJECT: 22010
MADISON CO. ENGINEER
222 GARFIELD AVE
LONDON, OH 43140

REPORT ON ESTABLISHMENT OF SURVEY MARK


DESCRIPTION OF MARK	DATE	QUAD: X	STATE: OHIO
02-023	4-1-02	INDEX:	COUNTY: MADISON
WGS 84		GRID ZONE: OH SOUTH	HEIGHT
LAT: N39°53'15.644457"	N	688410.0765	ELLIPSOID: 251.8948 m
LONG: W83°14'58.433024"	E	1758163.8085	ORTHO: 934.61 FT.
HORIZONTAL DATUM: NAD 83 (95)	PAF: X	GRID METERS	
VERTICAL DATUM: NAVD 88	GEOID MODEL: GEOID 99	N 209827.8110	
		E 535889.4006	ORTHO: 284.87 m.

NOTE: ALL
ELEVATIONS ARE
BASED ON GPS

DETAILED STATION DESCRIPTION

BRASS TABLET IN POURED IN PLACE MONUMENT.

SURVEY MONUMENT IS 15' NORTH OF LILLY CHAPEL-GEORGESVILLE RD, AT THE COUNTY LINE.

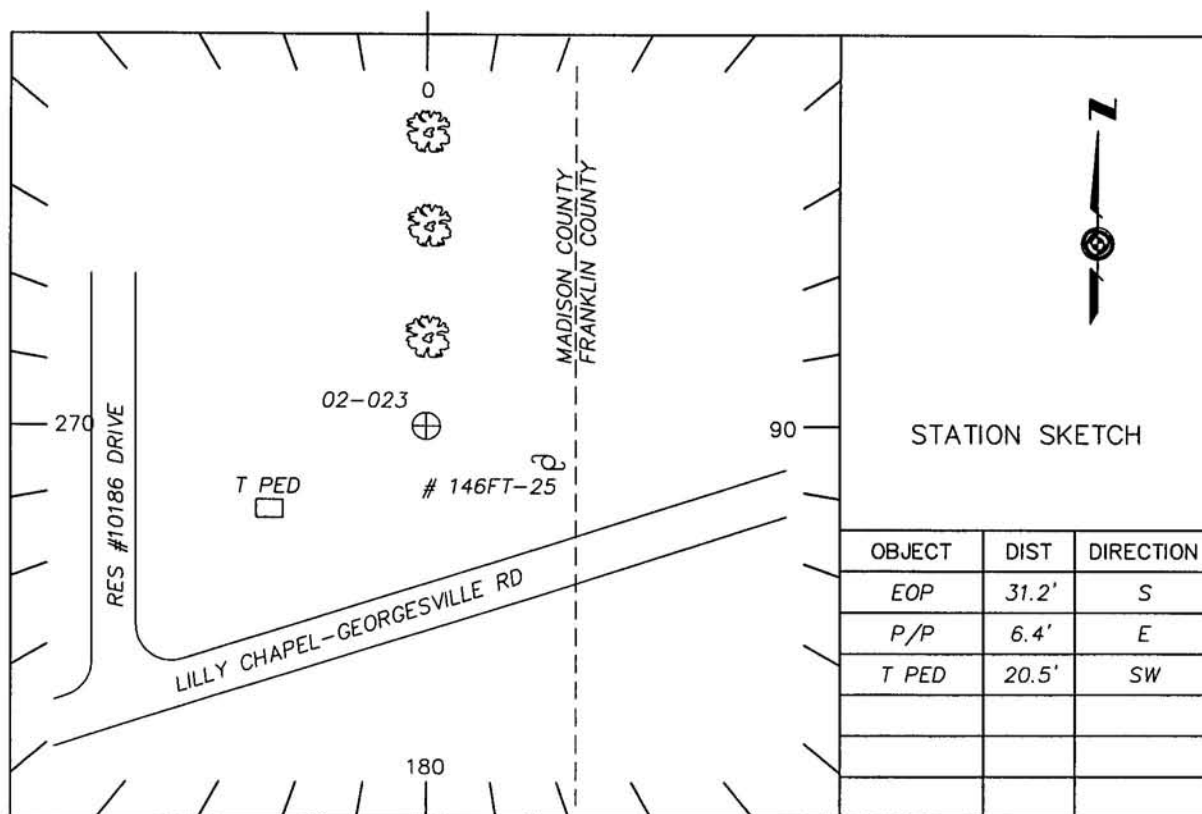



CANTER SURVEYING
GPS SERVICES, INC.

PROJECT: 22010
MADISON CO. ENGINEER
222 GARFIELD AVE
LONDON, OH 43140

REPORT ON ESTABLISHMENT OF SURVEY MARK


DESCRIPTION OF MARK	DATE	QUAD: X	STATE: OHIO
02-024	3-19-02	INDEX:	COUNTY: MADISON
WGS 84		GRID ZONE: OH SOUTH	HEIGHT
LAT: N40°6'36.178318"		N 769686.8194	ELLIPSOID: 264.8199 m
LONG: W83°21'33.610435"		E 1728132.4721	ORTHO: 978.01 FT.
HORIZONTAL DATUM: NAD 83 (95)		PAF: X	GRID METERS
VERTICAL DATUM: NAVD 88		GEOID MODEL: GEOID 99	N 234601.0118
		E 526735.8310	ORTHO: 298.10 m.

NOTE: ALL
ELEVATIONS ARE
BASED ON GPS

DETAILED STATION DESCRIPTION

BRASS TABLET IN POURED IN PLACE MONUMENT.

SURVEY MONUMENT IS 18' EAST OF DEBOLT ROAD, AT THE COUNTY LINE.

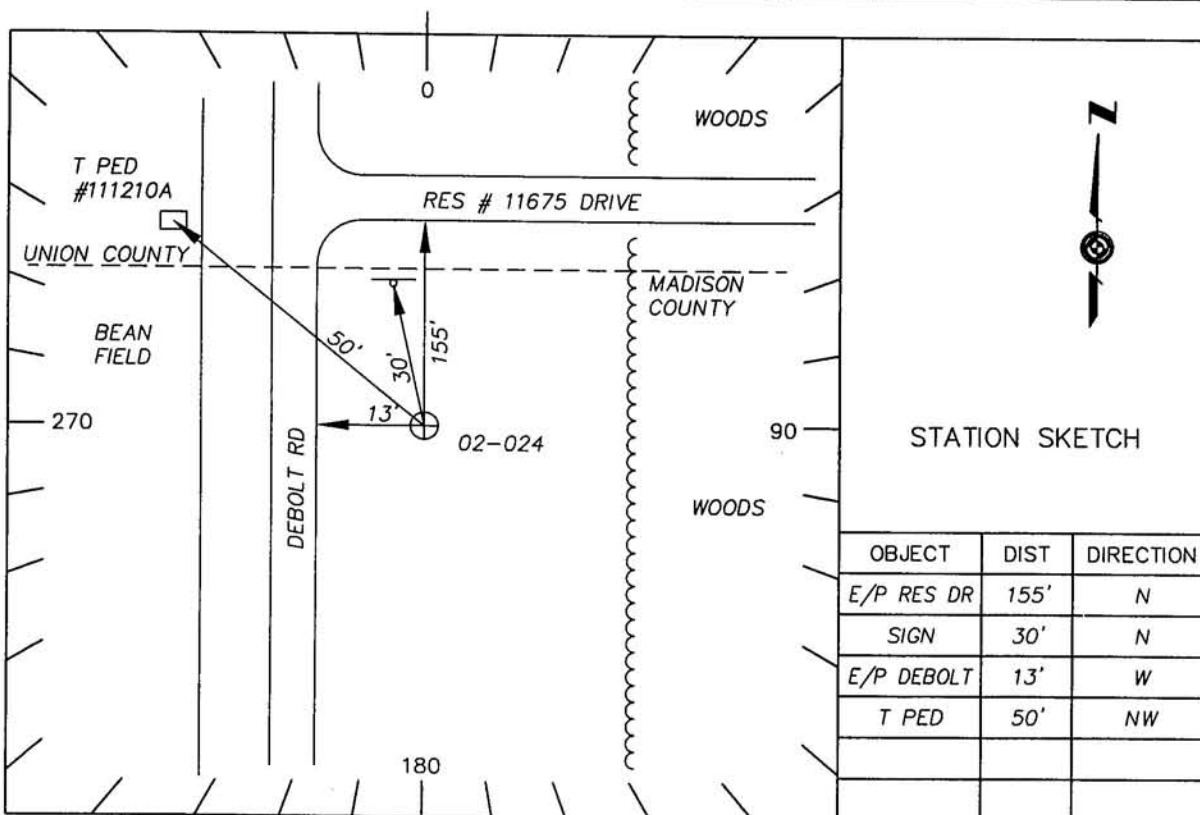



CANTER SURVEYING
GPS SERVICES, INC.

PROJECT: 22010
MADISON CO. ENGINEER
222 GARFIELD AVE
LONDON, OH 43140

REPORT ON ESTABLISHMENT OF SURVEY MARK


DESCRIPTION OF MARK	DATE	QUAD: X	STATE: OHIO
02-025	4-1-02	INDEX:	COUNTY: MADISON
WGS 84		GRID ZONE: OH SOUTH	HEIGHT
LAT: N39°42'8.214858"		N 621287.2628	ELLIPSOID: 270.7356 m
LONG: W83°24'26.698792"		E 1713191.6229	ORTHO: 995.00 FT.
HORIZONTAL DATUM: NAD 83 (95)		PAF: X	GRID METERS
VERTICAL DATUM: NAVD 88		GEOID MODEL: GEOID 99	N 189368.7364
			E 522181.8510
			ORTHO: 303.28 m.

NOTE: ALL
ELEVATIONS ARE
BASED ON GPS

DETAILED STATION DESCRIPTION

BRASS TABLET IN POURED IN PLACE MONUMENT.

SURVEY MONUMENT IS 14.7' EAST OF CL DNAVILLE ROAD, 96.3' SOUTHEAST OF MAILBOX 11137, AND 410' NORTH OF PHONE PEDESTAL 11137.

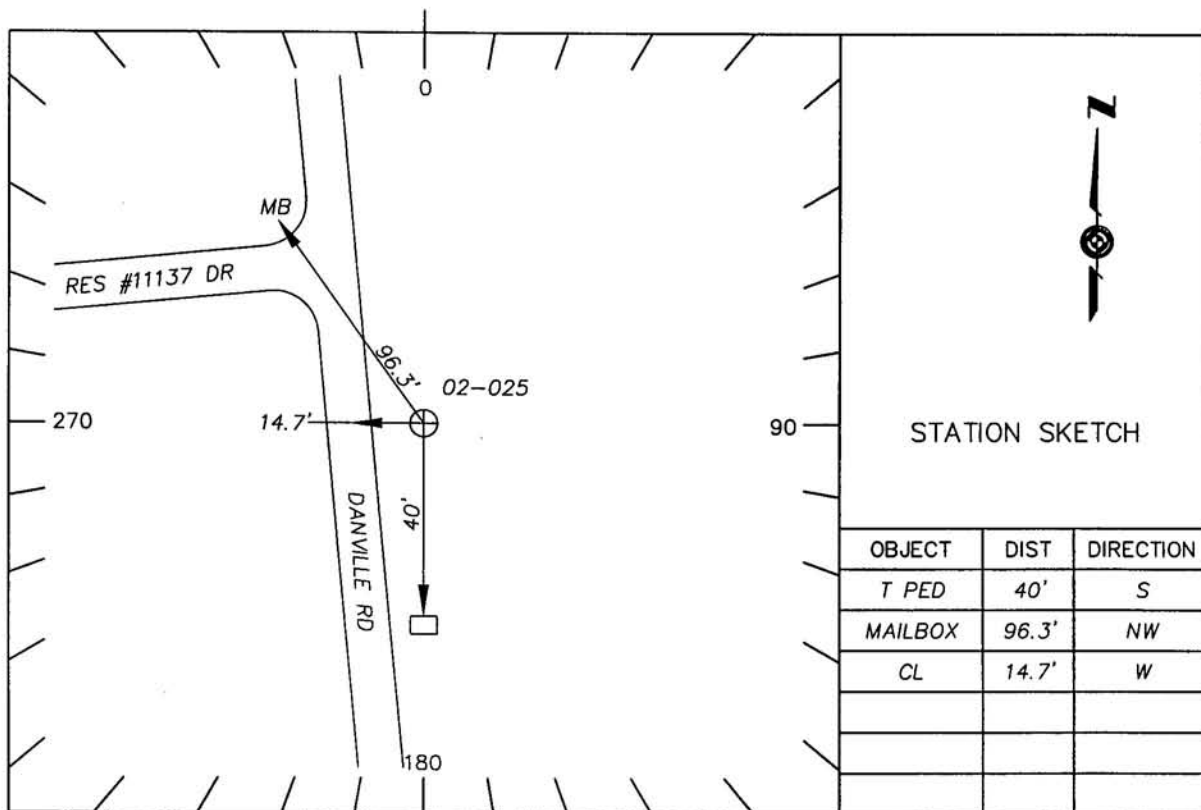



CANTER SURVEYING
GPS SERVICES, INC.


PROJECT: 5036

REPORT ON ESTABLISHMENT OF SURVEY MARK

DESCRIPTION OF MARK	DATE	QUAD:	STATE: OHIO
05-026	03/29/05	INDEX:	COUNTY: MADISON
WGS 84		GRID ZONE: OH SOUTH	HEIGHT
LAT: N39°59'19.533575"	N	725444.9840	ELLIPSOID: 264.204 m
LONG: W083°20'949088"	E	1733989.9967	ORTHO: 975.38 FT.
HORIZONTAL DATUM: NAD 83 (95)	PAF: X	GRID METERS	
VERTICAL DATUM: NAVD 88	GEOID MODEL: GEOID 99	N 221116.0734	
		E 528521.2080	ORTHO: 297.297 m

DETAILED STATION DESCRIPTION

POURED IN PLACE CONCRETE MONUMENT W/ BRASS TABLET STAMPED "MADISON COUNTY ENGINEER 05-026"
MONUMENT IS LOCATED NORTH OF THE INTERSECTION OF U.S. 42 AND C.R. 14,
APPROXIMATELY 4.5 MILES NE ALONG U.S. 42 FROM I-70.

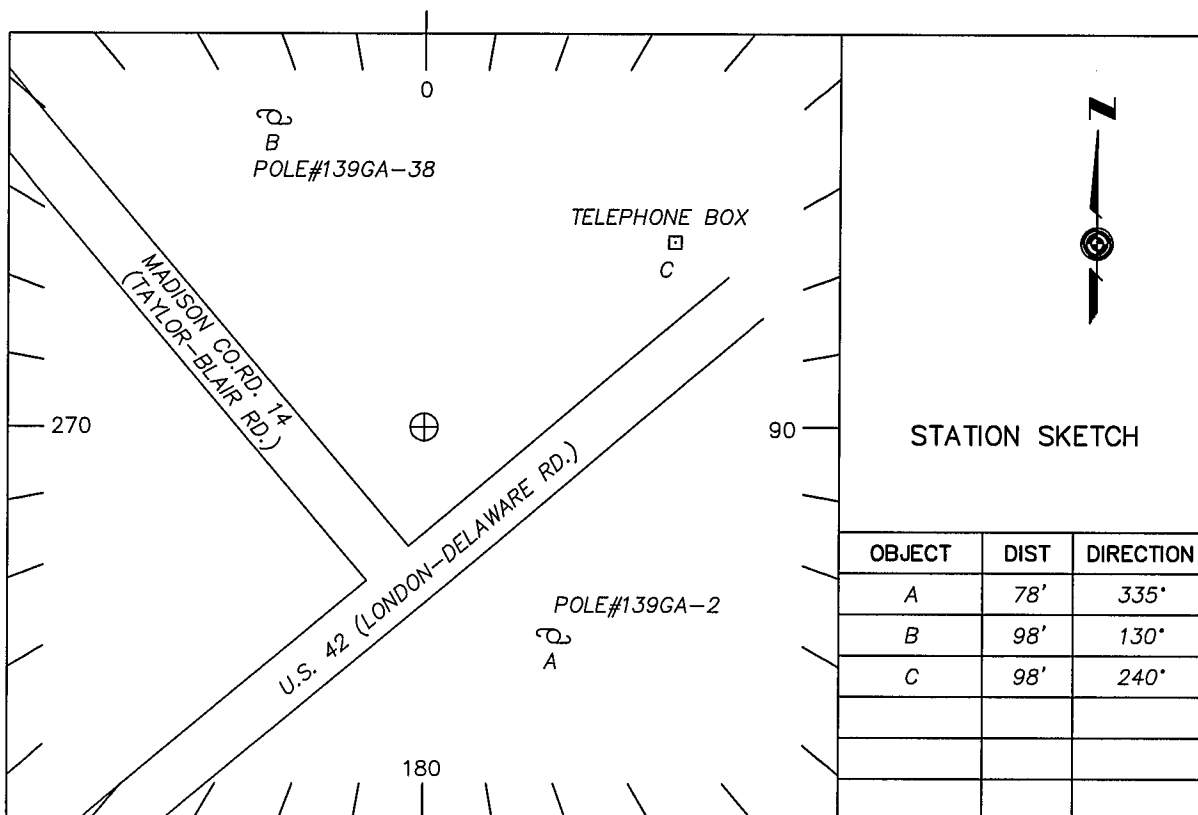



CANTER SURVEYING
GPS SERVICES, INC.


PROJECT: 5036

REPORT ON ESTABLISHMENT OF SURVEY MARK

DESCRIPTION OF MARK	DATE	QUAD:	STATE: OHIO
05-027	03/29/05	INDEX:	COUNTY: MADISON
WGS 84		GRID ZONE: OH SOUTH	HEIGHT
LAT: N40°05'39.688188"	N	763701.2647	ELLIPSOID: 245.248 m
LONG: W083°15'05.003014"	E	1758278.2003	ORTHO: 914.07 FT.
HORIZONTAL DATUM: NAD 83 (95)	PAF: X		GRID METERS
VERTICAL DATUM: NAVD 88	GEOID MODEL: GEOID 99		N 232776.6110
		E 535924.2673	ORTHO: 278.610 m.

DETAILED STATION DESCRIPTION

POURED IN PLACE CONCRETE MONUMENT W/BRASS TABLET STAMPED "MADISON COUNTY ENGINEER 05-027"
MONUMENT IS LOCATED NEAR THE NE SIDE OF FOREST GROVE CEMETERY, SW OF
THE DARBY TWP. BUILDING.
FOREST GROVE CEMETERY IS NE ALONG COUNTRY RD. 34, APPROXIMATELY 0.3 MILES
FROM THE INTERSECTION OF COUNTY RD. 7.

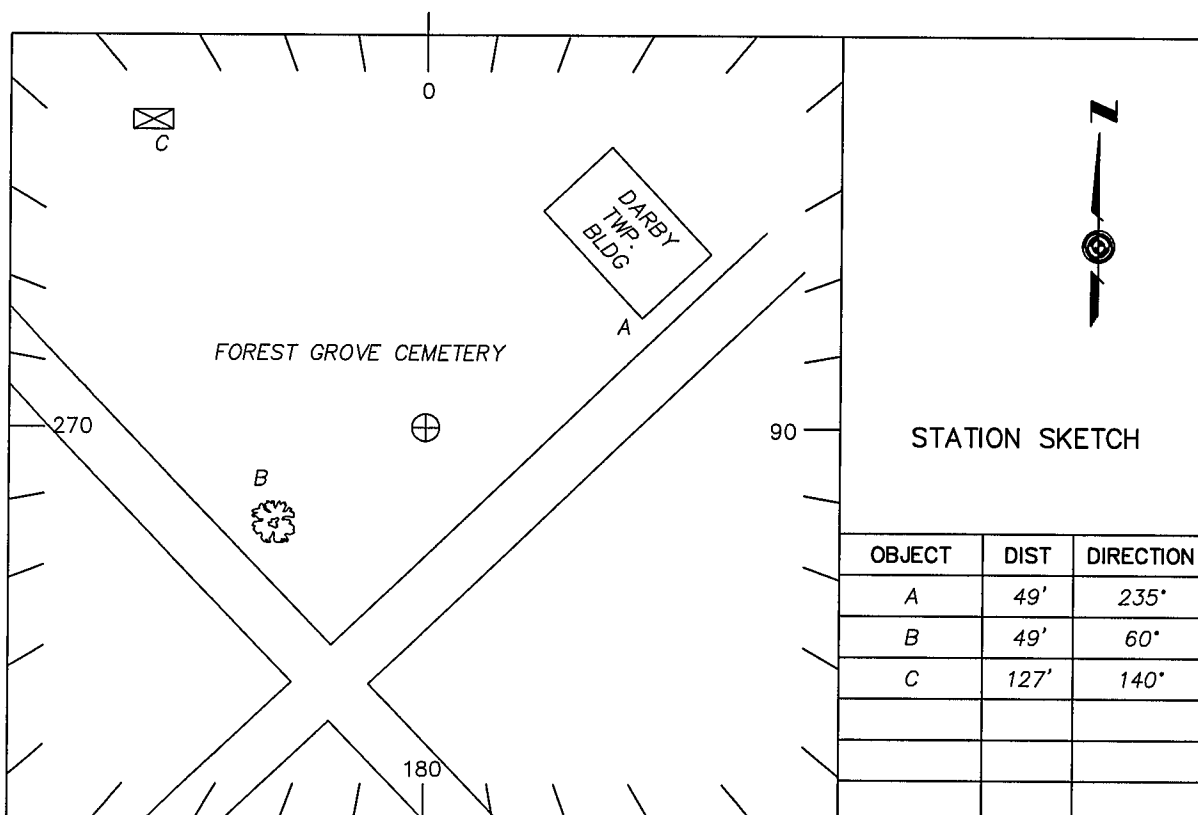



CANTER SURVEYING
GPS SERVICES, INC.


PROJECT: 5036

REPORT ON ESTABLISHMENT OF SURVEY MARK

DESCRIPTION OF MARK	DATE	QUAD:	STATE: OHIO
05-028	03/29/05	INDEX:	COUNTY: MADISON
WGS 84		GRID ZONE: OH SOUTH	HEIGHT
LAT: N40°05'56.997115"	N	765509.2181	ELLIPSOID: 252.163 m
LONG: W083°16'30.951111"	E	1751613.8644	ORTHO: 936.68 FT.
HORIZONTAL DATUM: NAD 83 (95)	PAF: X		GRID METERS
VERTICAL DATUM: NAVD 88	GEOID MODEL: GEOID 99	N 233327.6763	
		E 533892.9737	ORTHO: 285.500 m.

DETAILED STATION DESCRIPTION

POURED IN PLACE CONCRETE MONUMENT W/BRASS TABLET STAMPED "MADISON COUNTY ENGINEER 05-028".
MONUMENT IS LOCATED EAST OF THE INTERSECTION OF BUCKBOARD LANE &
HAWTHORNE DRIVE IN PLAIN CITY.

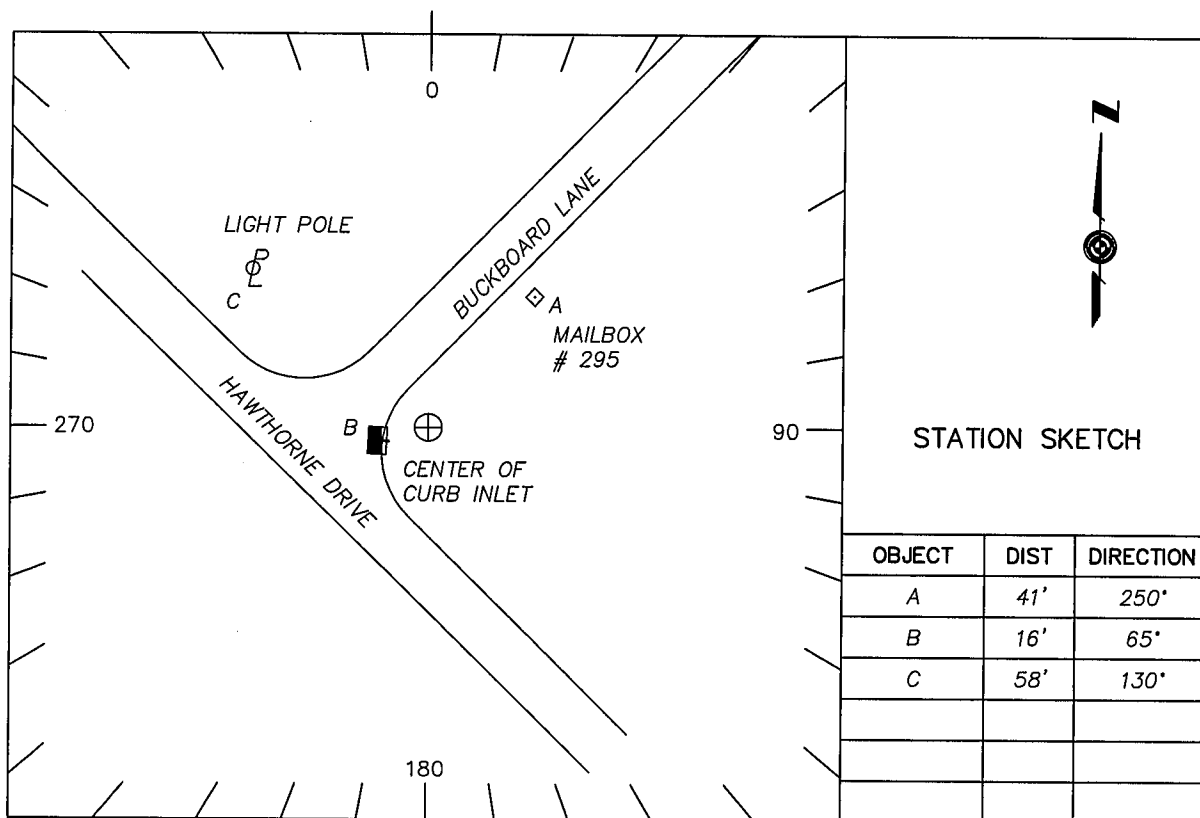



CANTER SURVEYING
GPS SERVICES, INC.


PROJECT: 5036

REPORT ON ESTABLISHMENT OF SURVEY MARK

DESCRIPTION OF MARK	DATE	QUAD:	STATE: OHIO
05-029	03/29/05	INDEX:	COUNTY: MADISON
WGS 84		GRID ZONE: OH SOUTH	HEIGHT
LAT: N40°06'21.915798"	N	768063.4698	ELLIPSOID: 255.275 m
LONG: W083°17'19.584336"	E	1747856.6754	ORTHO: 946.87 FT.
HORIZONTAL DATUM: NAD 83 (95)	PAF: X		GRID METERS
VERTICAL DATUM: NAVD 88	GEOID MODEL: GEOID 99		N 234106.2138
		E 532747.7802	ORTHO: 288.606 m.

DETAILED STATION DESCRIPTION

POURED IN PLACE CONCRETE MONUMENT W/BRASS TABLET STAMPED "MADISON COUNTY ENGINEER 05-029".
MONUMENT IS LOCATED EAST OF THE INTERSECTION OF C.R. 40 AND C.R. 5
AT THE WEST EDGE OF PLAIN CITY.

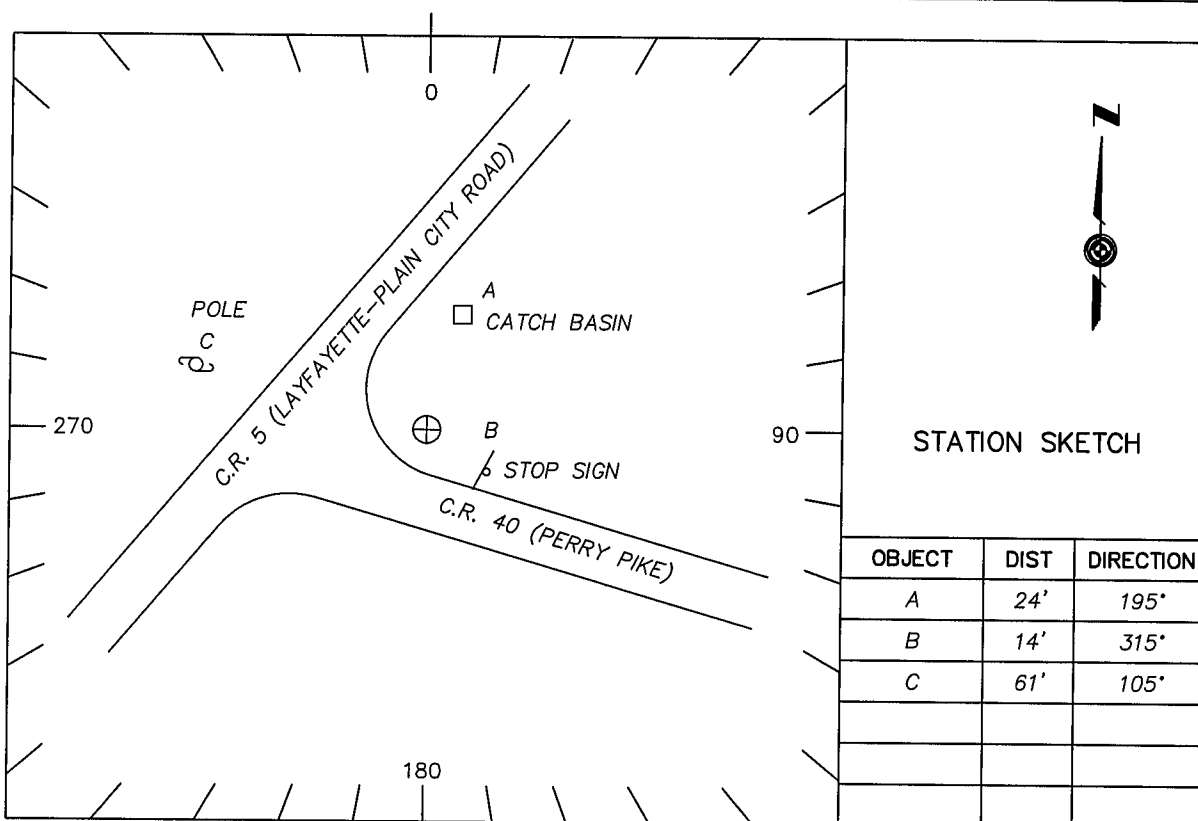



CANTER SURVEYING
GPS SERVICES, INC.


PROJECT: 5036


REPORT ON ESTABLISHMENT OF SURVEY MARK

DESCRIPTION OF MARK	DATE	QUAD:	STATE: OHIO
05-030	03/29/05	INDEX:	COUNTY: MADISON
WGS 84		GRID ZONE: OH SOUTH	HEIGHT
LAT: N40°00'24.862901"	N	732460.3594	ELLIPSOID: 293.684 m
LONG: W083°28'50.106975"	E	1693810.7616	ORTHO: 1072.16 FT.
HORIZONTAL DATUM: NAD 83 (95)	PAF: X	GRID METERS	
VERTICAL DATUM: NAVD 88	GEOID MODEL: GEOID 99	N 223254.3641	
		E 516274.5527	ORTHO: 326.796 m.

DETAILED STATION DESCRIPTION

POURED IN PLACE CONCRETE MONUMENT W/BRASS TABLET STAMPED "MADISON COUNTY ENGINEER 05-030".
MONUMENT IS ON C.R. 113 BETWEEN S.R. 29 AND S.R. 187,
AT THE INTERSECTION OF C.R. 112.

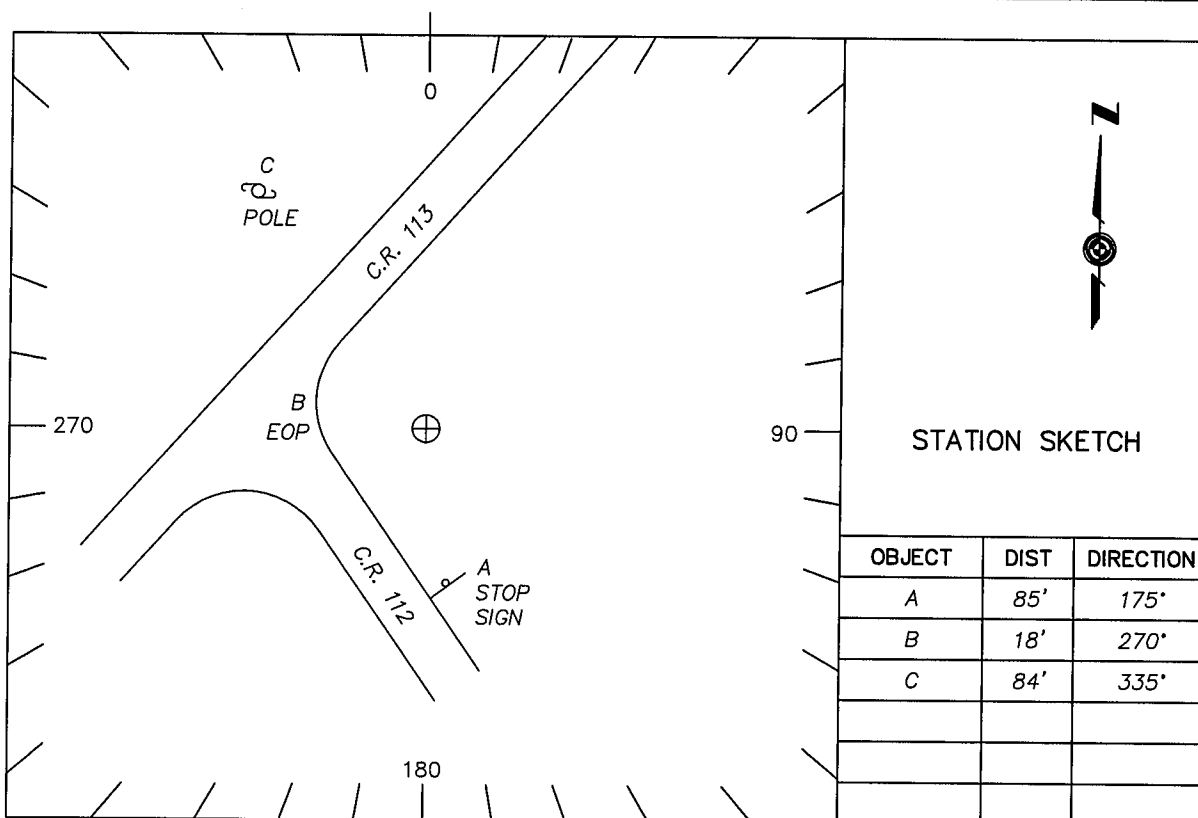



CANTER SURVEYING
GPS SERVICES, INC.


PROJECT: 5036

REPORT ON ESTABLISHMENT OF SURVEY MARK

DESCRIPTION OF MARK	DATE	QUAD:	STATE: OHIO
05-031	03/29/05	INDEX:	COUNTY: MADISON
WGS 84		GRID ZONE: OH SOUTH	HEIGHT
LAT: N39°57'23.446265"	N	714135.6292	ELLIPSOID: 291.896 m
LONG: W083°29'27.287430"	E	1690716.2967	ORTHO: 1065.93 FT.
HORIZONTAL DATUM: NAD 83 (95)	PAF: X		GRID METERS
VERTICAL DATUM: NAVD 88	GEOID MODEL: GEOID 99	N 217668.9751	
		E 515331.3579	ORTHO: 324.895 m

DETAILED STATION DESCRIPTION

POURED IN PLACE CONCRETE MONUMENT W/BRASS TABLET STAMPED "MADISON COUNTY ENGINEER 05-031".
MONUMENT IS LOCATED AT CHOCTAW LAKE ON ONEIDA DR. APPROXIMATELY 350 FEET EAST
OF CHICASAW DR.

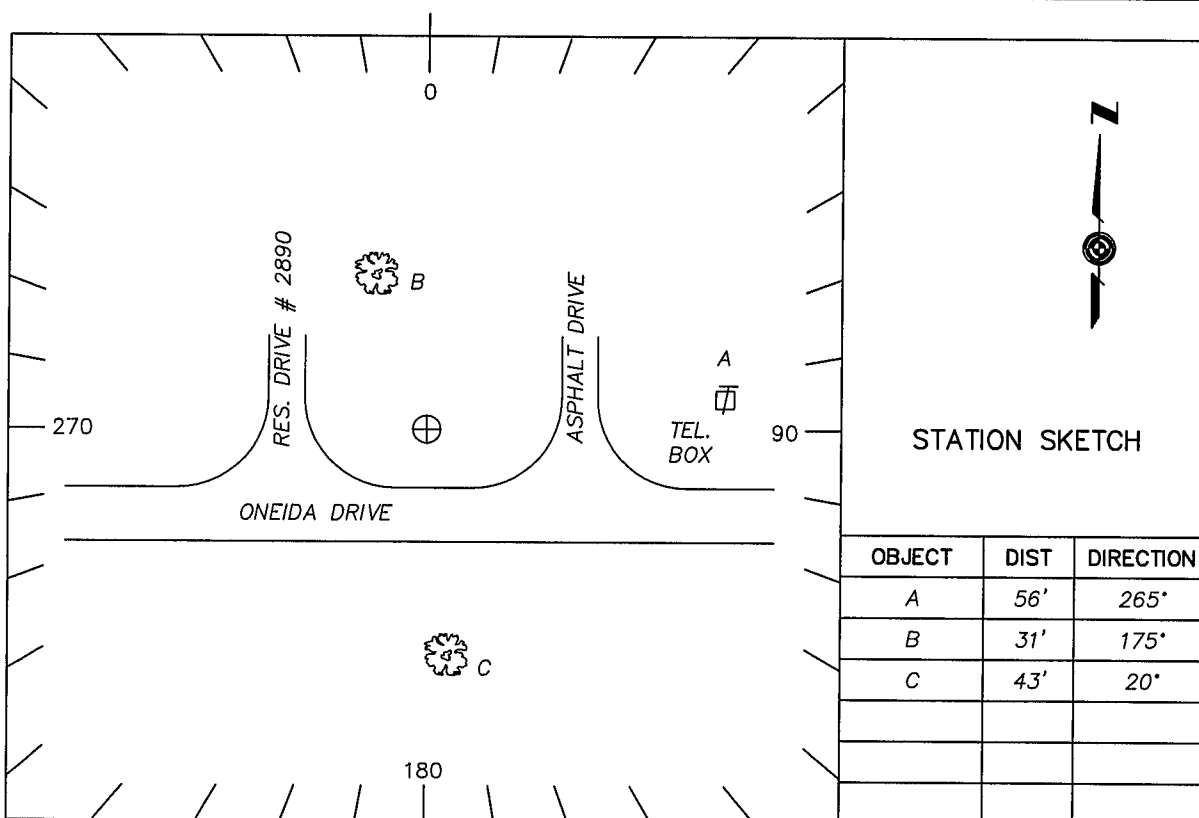



CANTER SURVEYING
GPS SERVICES, INC.


PROJECT: 5036

REPORT ON ESTABLISHMENT OF SURVEY MARK

DESCRIPTION OF MARK	DATE	QUAD:	STATE: OHIO
05-032	03/29/05	INDEX:	COUNTY: MADISON
WGS 84		GRID ZONE: OH SOUTH	HEIGHT
LAT: N39°47'56.939458"	N	657009.0868	ELLIPSOID: 303.894 m
LONG: W083°33'05.293486"	E	1673073.4958	ORTHO: 1104.51 FT.
HORIZONTAL DATUM: NAD 83 (95)	PAF: X		GRID METERS
VERTICAL DATUM: NAVD 88	GEOID MODEL: GEOID 99		N 200256.7702
		E 509953.8214	ORTHO: 336.654 m

DETAILED STATION DESCRIPTION

POURED IN PLACE CONCRETE MONUMENT W/BRASS TABLET STAMPED "MADISON COUNTY ENGINEER 05-032".
THE MONUMENT IS LOCATED NORTH OF THE INTERSECTION OF LINSON ROAD AND SELNOR ROAD,
10' NORTH OF THE NORTH EDGE OF PAVEMENT OF LINSON ROAD.

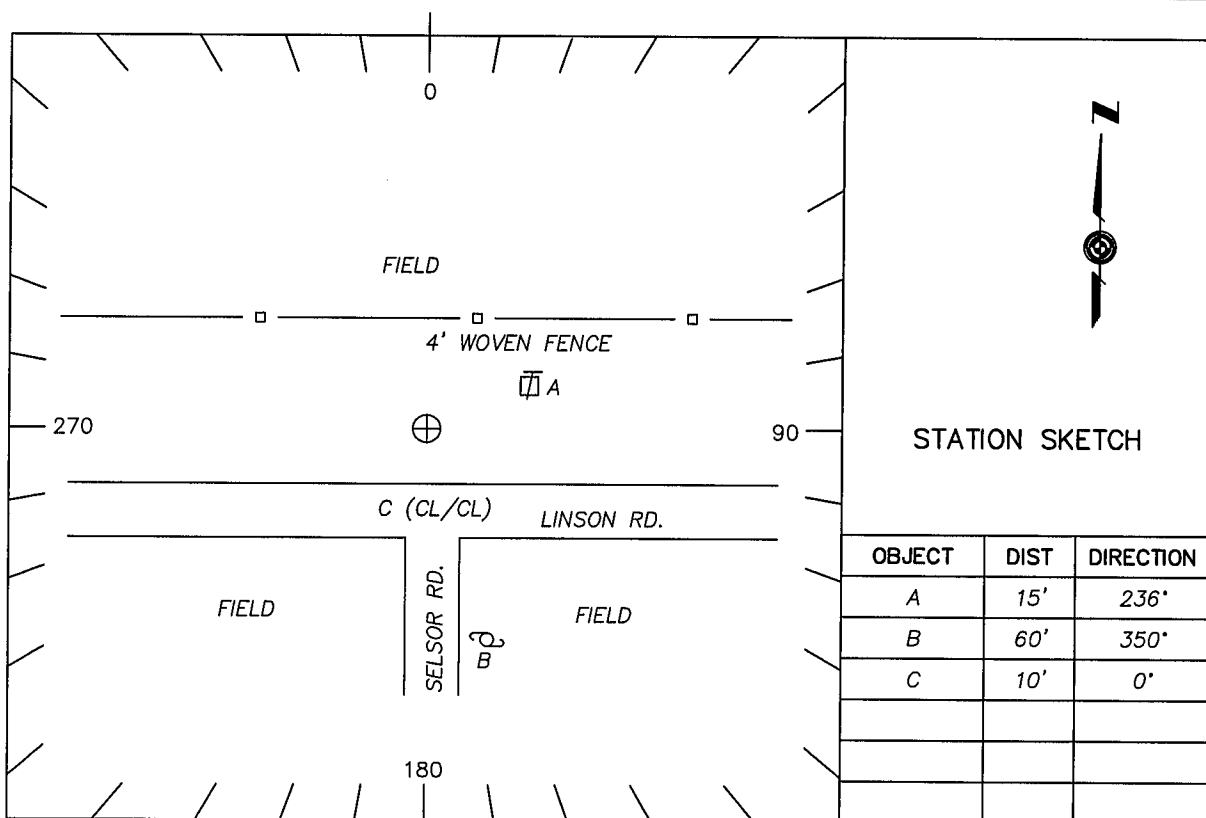



CANTER SURVEYING
GPS SERVICES, INC.


PROJECT: 5036


REPORT ON ESTABLISHMENT OF SURVEY MARK

DESCRIPTION OF MARK	DATE	QUAD:	STATE: OHIO
05-033	03/29/05	INDEX:	COUNTY: MADISON
WGS 84		GRID ZONE: OH SOUTH	HEIGHT
LAT: N39°43'49.524557" N		631918.2925	ELLIPSOID: 295.402 m
LONG: W083°32'00.427802 E		1677849.2656	ORTHO: 1076.35 FT.
HORIZONTAL DATUM: NAD 83 (95)		PAF: X	GRID METERS
VERTICAL DATUM: NAVD 88		GEOID MODEL: GEOID 99	N 192609.0808
		E 511409.4790	ORTHO: 328.071 m

DETAILED STATION DESCRIPTION

POURED IN PLACE CONCRETE MONUMENT W/BRASS TABLET STAMPED "MADISON COUNTY ENGINEER 05-033".
THE MONUMENT IS LOCATED 19' SOUTH OF THE CL/CL INTERSECTION OF S.R. 323
AND FRALICK ROAD.

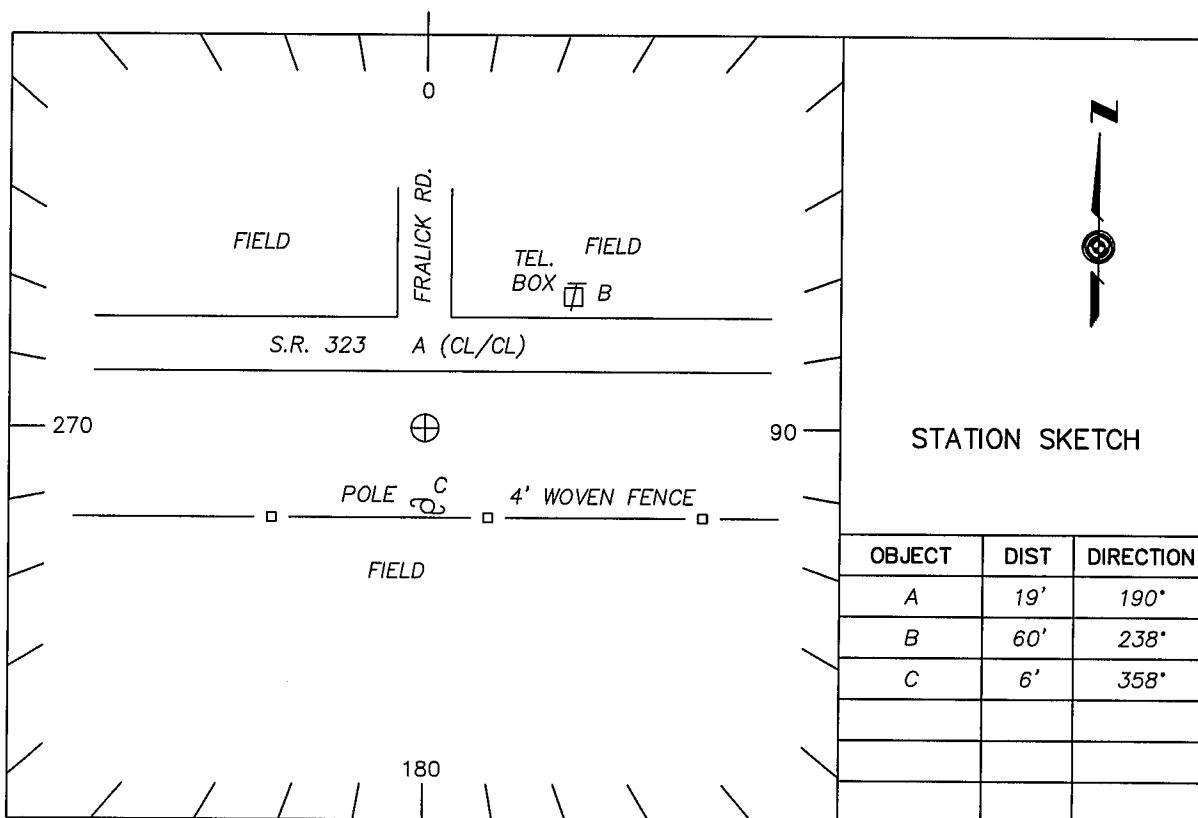



CANTER SURVEYING
GPS SERVICES, INC.


PROJECT: 5036


REPORT ON ESTABLISHMENT OF SURVEY MARK

DESCRIPTION OF MARK	DATE	QUAD:	STATE: OHIO
05-034	03/29/05	INDEX:	COUNTY: MADISON
WGS 84		GRID ZONE: OH SOUTH	HEIGHT
LAT: N39°46'42.356855"	N	649001.0369	ELLIPSOID: 269.226 m
LONG: W083°23'57.341024"	E	1715762.2333	ORTHO: 990.35 FT.
HORIZONTAL DATUM: NAD 83 (95)	PAF: X		GRID METERS
VERTICAL DATUM: NAVD 88	GEOID MODEL: GEOID 99		N 197815.9117
		E 522965.3747	ORTHO: 301.859 m

DETAILED STATION DESCRIPTION

POURED IN PLACE CONCRETE MONUMENT W/BRASS TABLET STAMPED "MADISON COUNTY ENGINEER 05-034".
THE MONUMENT IS LOCATED AT THE INTERSECTION OF MOORMAN ROAD AND
YANKEETOWN-CHENOWETH ROAD.

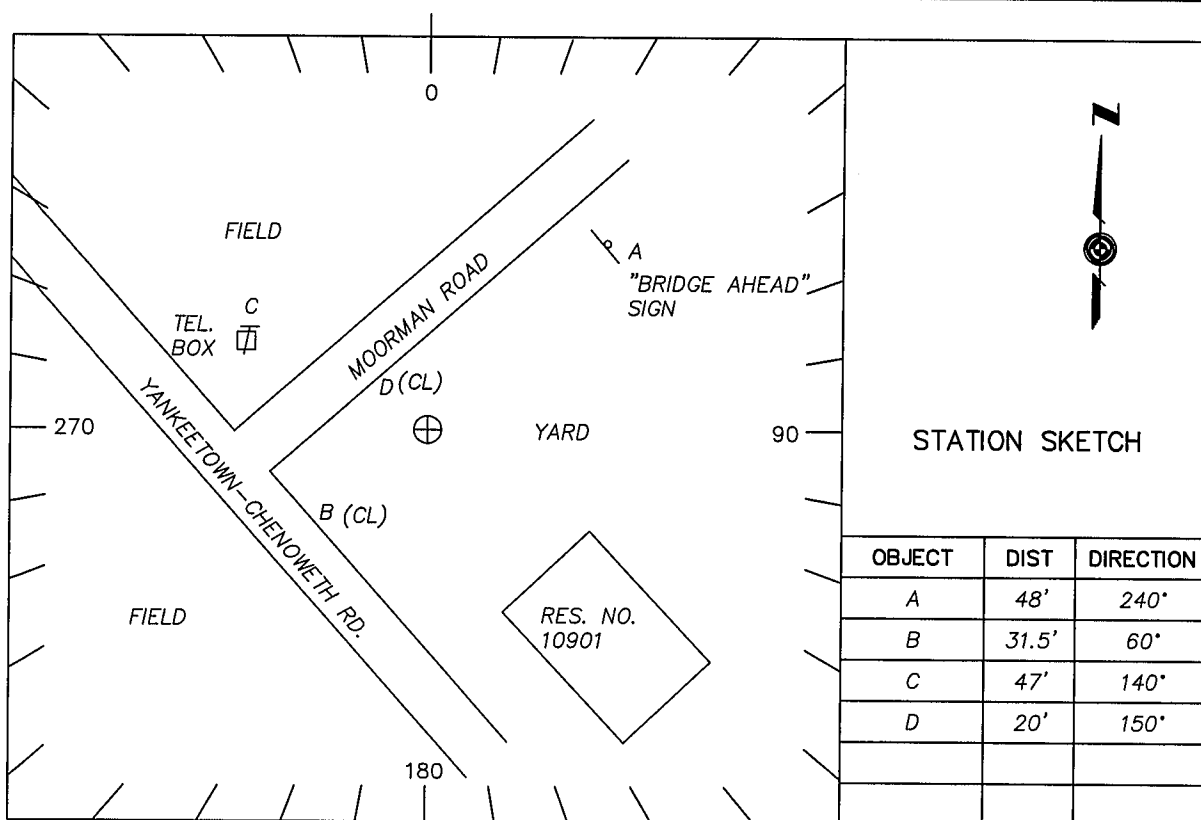



CANTER SURVEYING
GPS SERVICES, INC.

PROJECT: 5036

REPORT ON ESTABLISHMENT OF SURVEY MARK


DESCRIPTION OF MARK	DATE	QUAD:	STATE: OHIO
05-035	03/29/05	INDEX:	COUNTY: MADISON
WGS 84		GRID ZONE: OH SOUTH	HEIGHT
LAT: N39°47'09.103304"		N 651377.0915	ELLIPSOID: 252.476 m
LONG: W083°16'20.499906"		E 1751449.8218	ORTHO: 935.89 FT.
HORIZONTAL DATUM: NAD 83 (95)		PAF: X	GRID METERS
VERTICAL DATUM: NAVD 88		GEOID MODEL: GEOID 99	N 198540.1346
		E 533842.9734	ORTHO: 285.259 m

DETAILED STATION DESCRIPTION

POURED IN PLACE CONCRETE MONUMENT W/BRASS TABLET STAMPED "MADISON COUNTY ENGINEER 05-035"

THE MONUMENT IS LOCATED AT THE INTERSECTION OF NIOGA-TOOPS AND McKENDREE ROADS,

17 FEET SOUTH OF THE CL OF McKENDREE AND 30 FEET EAST OF THE CL OF NIOGA-TOOPS.

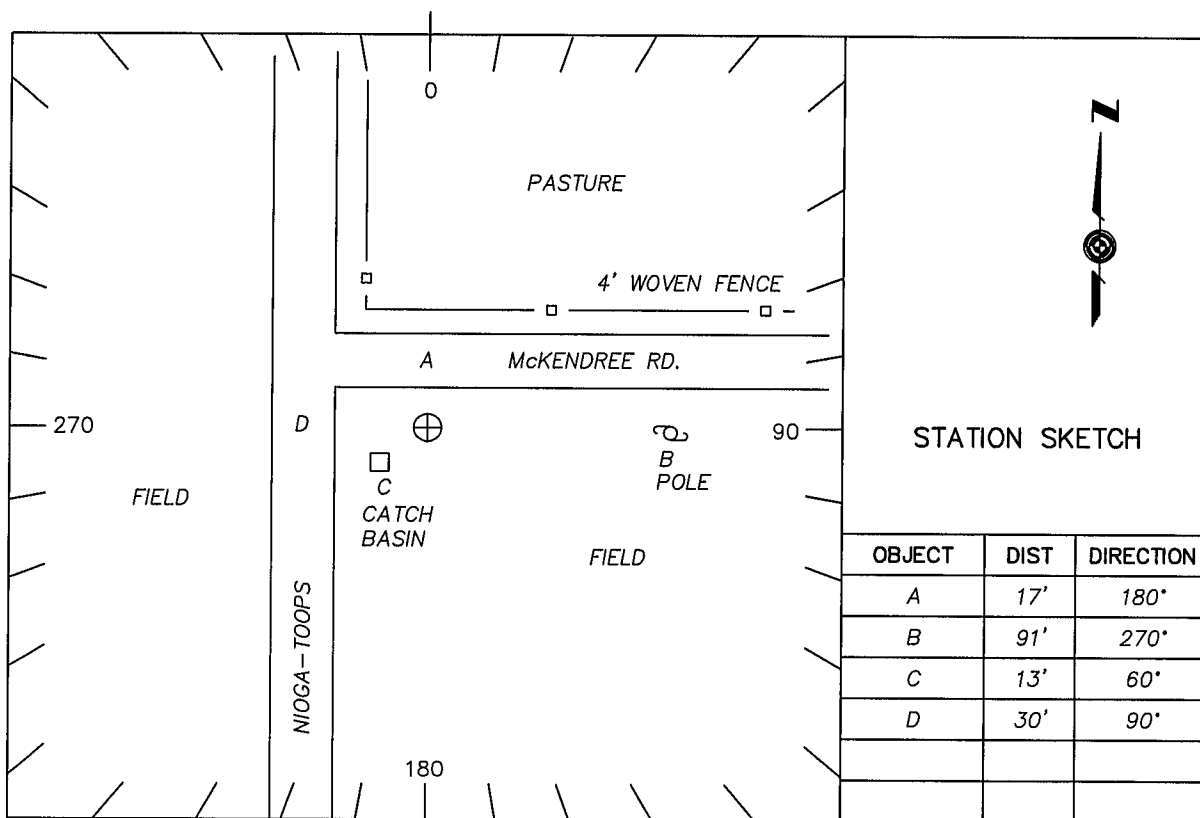



CANTER SURVEYING
GPS SERVICES, INC.


PROJECT: 5036

REPORT ON ESTABLISHMENT OF SURVEY MARK

DESCRIPTION OF MARK	DATE	QUAD:	STATE: OHIO
05-036	03/29/05	INDEX:	COUNTY: MADISON
WGS 84		GRID ZONE: OH SOUTH	HEIGHT
LAT: N39°53'12.926813"	N	688492.1515	ELLIPSOID: 274.193 m
LONG: W083°23'23.064912"	E	1718827.4621	ORTHO: 1007.28 FT.
HORIZONTAL DATUM: NAD 83 (95)	PAF: X		GRID METERS
VERTICAL DATUM: NAVD 88	GEOID MODEL: GEOID 99		N 209852.8275
		E 523899.6583	ORTHO: 307.021 m

DETAILED STATION DESCRIPTION

POURED IN PLACE CONCRETE MONUMENT W/BRASS TABLET STAMPED "MADISON COUNTY ENGINEER 05-036".
THE MONUMENT IS LOCATED AT THE INTERSECTION OF S.R. 665 AND SPRING VALLEY RD.,
25 FEET WEST OF THE CL OF SPRING VALLEY RD. AND 29 FEET NORTH OF THE CL OF S.R. 665.

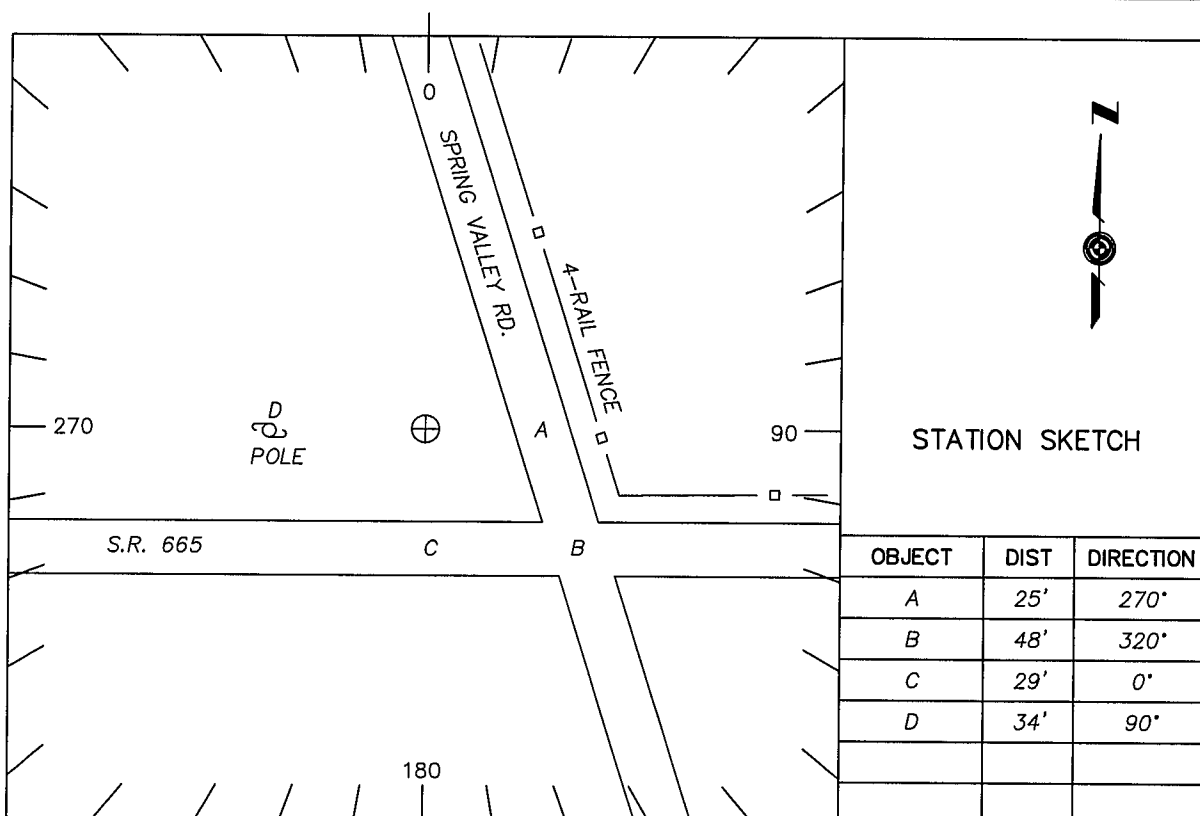



COTTRILL SURVEYING, LLC
8256 S.R. 207 N.E. MT. STERLING, OHIO 43143
PH. (740) 869-3811

PROJECT: S120305(A)
MADISON CO. ENGINEER
LONDON, OH. 43140

REPORT ON ESTABLISHMENT OF SURVEY MARK


DESCRIPTION OF MARK	DATE	QUAD:	STATE: OHIO
12-37	5/8/12	INDEX:	COUNTY: MADISON
WGS 84		GRID ZONE: OH SOUTH	HEIGHT
LAT: N 39°42'44.06067"		N 624727.087 (FT.)	ELLIPSOID: 253.573(M)
LONG.: W 83°20'19.33679"		E 1732557.273 (FT.)	ORTHO: 938.82 FT.
HORIZONTAL DATUM: NAD 83(96)		PAF:	GRID METERS
			N 190417.197 (M)
VERTICAL DATUM: NAD 88		GEOID MODEL: 09	E 528084.513 (M)
			ORTHO: 286.153(M)

NOTE: ALL
ELEVATIONS ARE
BASED ON GPS

DETAILED STATION DESCRIPTION:

APPROX. 1' DIAMETER REINFORCED CONCRETE MONUMENT WITH BRASS TABLET STAMPED "12-37"

MONUMENT IS 20.6' EAST OF THE O'DAY HARRISON AND BRAGG ROAD INTERSECTION &
9' OFF OF THE EDGE OF PAVEMENT

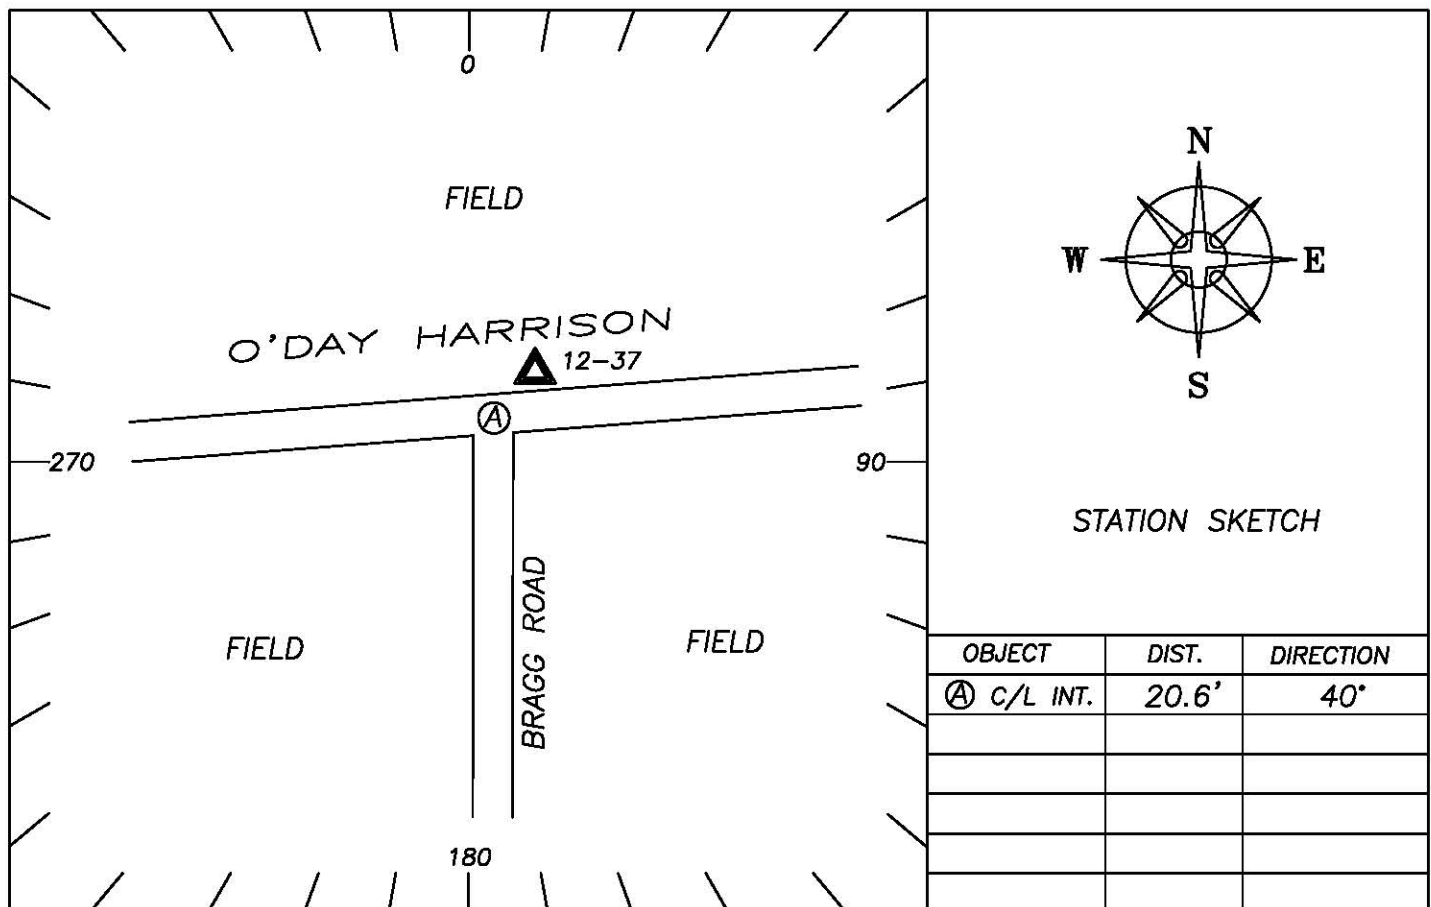



COTTRILL SURVEYING, LLC
8256 S.R. 207 N.E. MT. STERLING, OHIO 43143
PH. (740) 869-3811

PROJECT: S120305(B)
MADISON CO. ENGINEER
LONDON, OH. 43140

REPORT ON ESTABLISHMENT OF SURVEY MARK


DESCRIPTION OF MARK	DATE	QUAD:	STATE: OHIO	NOTE: ALL ELEVATIONS BASED ON
12-38	5/22/12	INDEX:	COUNTY: MADISON	
WGS 84		GRID ZONE: OH SOUTH	HEIGHT	
LAT: N 39°48'33.77259"		N 660117.1837 (FT.)	ELLIPSOID: 259.343(M)	
LONG.: W 83°20'29.02750"		E 1732129.7345 (FT.)	ORTHO: 958.08 FT.	
HORIZONTAL DATUM: NAD 83(96)		PAF:	GRID METERS	
VERTICAL DATUM: NAD 88		GEOID MODEL: 09	N 201204.120 (M)	
			E 527954.199 (M)	
				ORTHO: 292.023(M)

NOTE: ALL
ELEVATIONS ARE
BASED ON GPS

DETAILED STATION DESCRIPTION:

APPROX. 1' DIAMETER REINFORCED CONCRETE MONUMENT WITH BRASS TABLET STAMPED "12-38"

MONUMENT IS APPROX. 1 MILE SOUTH OF MOORMAN ROAD, 25.5' FROM THE CENTERLINE OF
STATE ROUTE 56 & 4.5' SOUTH OF 18" CONCRETE FENCE POST

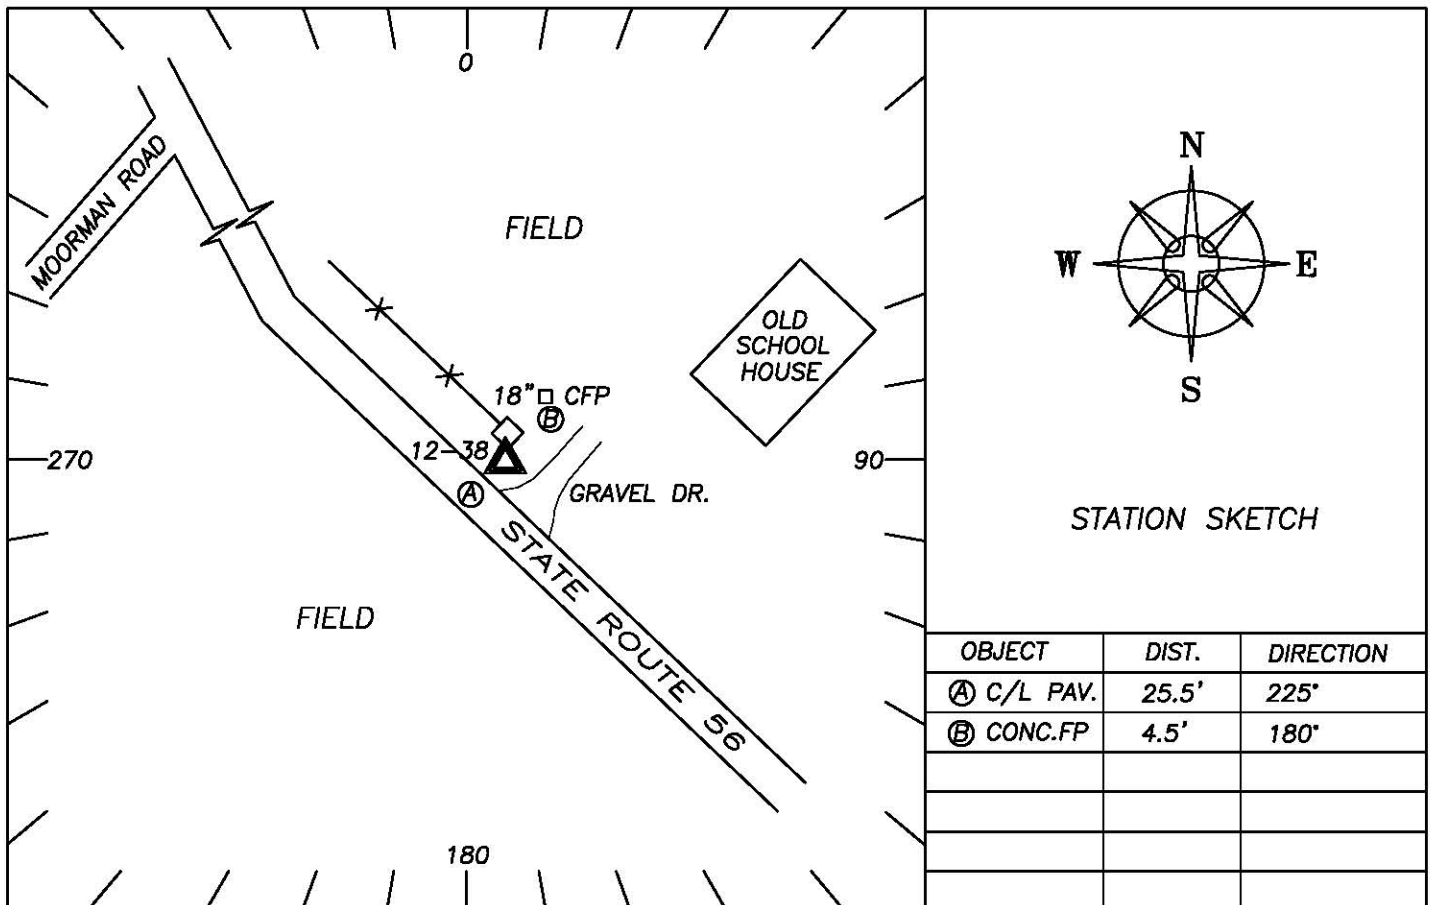



COTTRILL SURVEYING, LLC
8256 S.R. 207 N.E. MT. STERLING, OHIO 43143
PH. (740) 869-3811

PROJECT: S120305G
MADISON CO. ENGINEER
LONDON, OH. 43140

REPORT ON ESTABLISHMENT OF SURVEY MARK


DESCRIPTION OF MARK	DATE	QUAD:	STATE: OHIO
12-39		INDEX:	COUNTY: MADISON
WGS 84		GRID ZONE: OH SOUTH	HEIGHT
LAT: N39°53'51.21919"		N 692175.1839 (FT.)	ELLIPSOID: 266.175 (M)
LONG.: W83°19'03.23571"		E 1739115.1339 (FT.)	ORTHO: 981.18 (FT.)
HORIZONTAL DATUM: NAD 83(96)		PAF:	GRID METERS
			N 210975.418 (M)
VERTICAL DATUM: NAD 88		GEOID MODEL: 09	E 530083.353 (M)
			ORTHO: 299.065 (M)

NOTE: ALL ELEVATIONS ARE BASED ON GPS

DETAILED STATION DESCRIPTION:

APPROX. 1' DIAMETER REINFORCED CONCRETE MONUMENT WITH BRASS TABLET STAMPED "12-39"

FROM THE INTERSECTION OF STATE ROUTE 142 AND GLADE RUN ROAD GO SOUTH ON GLADE RUN ROAD 1.4 MILES TO SPARLING ROAD, THEN GO EAST ON SPARLING ROAD 1.9 MILES. MONUMENT IS ON THE NORTH SIDE OF ROAD. 2736 FEET WEST OF WILSON ROAD.

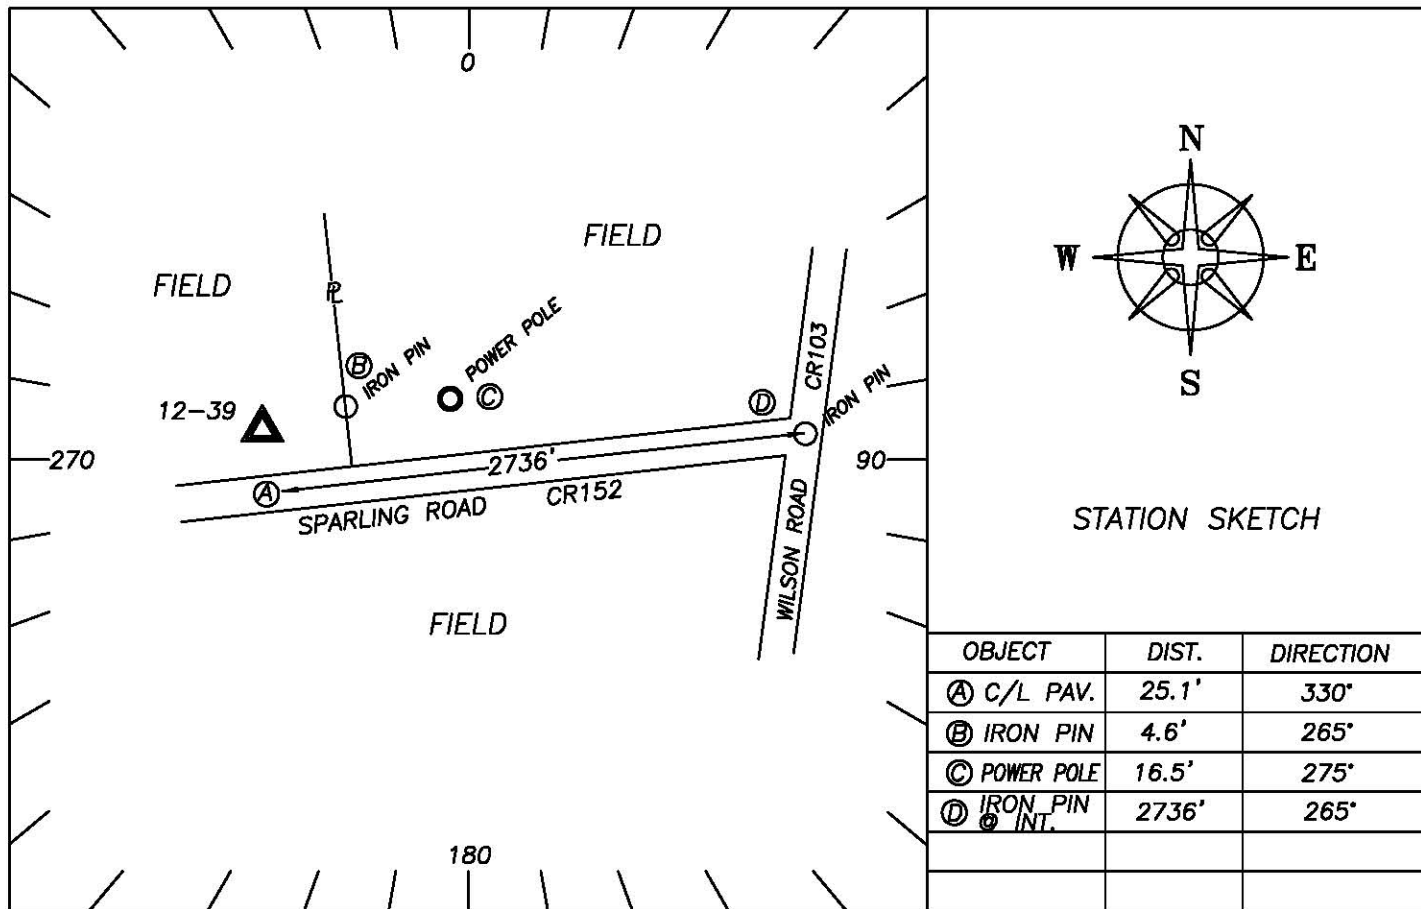



COTTRILL SURVEYING, LLC
8256 S.R. 207 N.E. MT. STERLING, OHIO 43143
PH. (740) 869-3811

PROJECT: S120305I
MADISON CO. ENGINEER
LONDON, OH. 43140

REPORT ON ESTABLISHMENT OF SURVEY MARK


DESCRIPTION OF MARK	DATE	QUAD:	STATE: OHIO
12-40		INDEX:	COUNTY: MADISON
WGS 84		GRID ZONE: OH SOUTH	HEIGHT
LAT: N39°59'52.88984"		N 728639.3564 (FT.)	ELLIPSOID: 247.275 (M)
LONG.: W83°15'50.90964"		E 1754413.6401 (FT.)	ORTHO: 920.28 (FT.)
HORIZONTAL DATUM: NAD 83(96)		PAF:	GRID METERS
			N 222089.720 (M)
VERTICAL DATUM: NAD 88		GEOID MODEL: 09	E 534746.347 (M)
			ORTHO: 280.502 (M)

NOTE: ALL ELEVATIONS ARE BASED ON GPS

DETAILED STATION DESCRIPTION:

APPROX. 1' DIAMETER REINFORCED CONCRETE MONUMENT WITH BRASS TABLET STAMPED "12-40"

FROM THE INTERSECTION OF US 40 AND PLAINCITY-GEORGESVILLE ROAD, JUST EAST OF THE VILLAGE OF WEST JEFFERSVILLE, GO NORTH ON PLAINCITY-GEORGESVILLE ROAD 3.7 MILES TO MORGAN ROAD, TRUN LEFT ON MORGAN ROAD MONUMENT IS ON THE SOUTH SIDE OF MORGAN ROAD, 67 FEET FROM INTERSECTION.

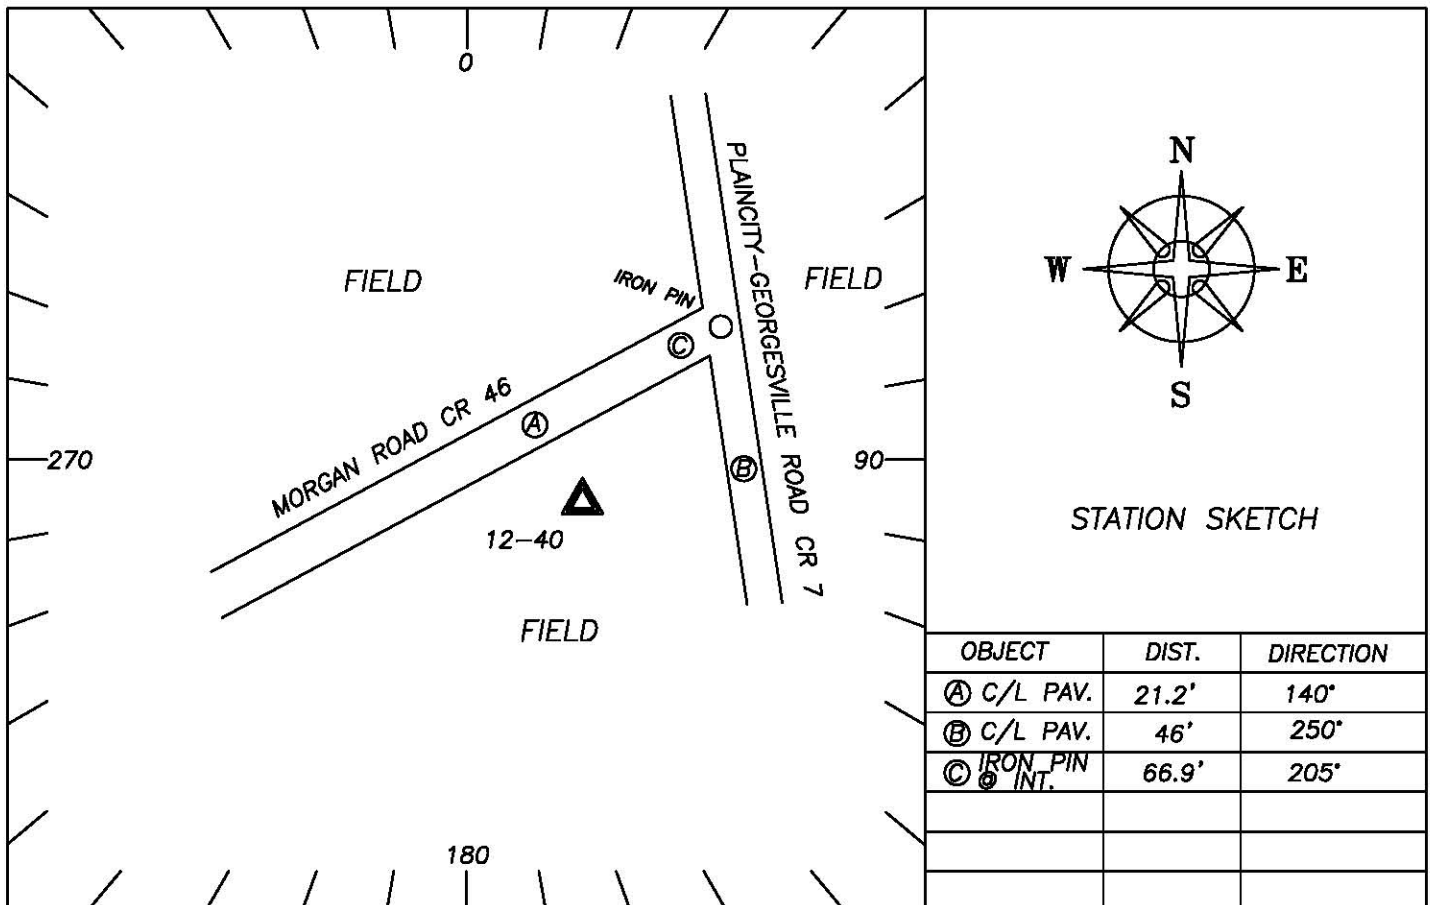



COTTRILL SURVEYING, LLC
8256 S.R. 207 N.E. MT. STERLING, OHIO 43143
PH. (740) 869-3811

PROJECT: S120305H
MADISON CO. ENGINEER
LONDON, OH. 43140

REPORT ON ESTABLISHMENT OF SURVEY MARK


DESCRIPTION OF MARK	DATE	QUAD:	STATE: OHIO
12-41		INDEX:	COUNTY: MADISON
WGS 84		GRID ZONE: OH SOUTH	HEIGHT
LAT: N40°00'32.57102"		N 732649.9487 (FT.)	ELLIPSOID: 245.959 (M)
LONG.: W83°15'43.90932"		E 1754992.3102 (FT.)	ORTHO: 916.04 (FT.)
HORIZONTAL DATUM: NAD 83(96)		PAF:	GRID METERS
			N 223312.151 (M)
VERTICAL DATUM: NAD 88		GEOID MODEL: 09	E 534922.726 (M)
			ORTHO: 279.210(M)

NOTE: ALL
ELEVATIONS ARE
BASED ON GPS

DETAILED STATION DESCRIPTION:

APPROX. 1' DIAMETER REINFORCED CONCRETE MONUMENT WITH BRASS TABLET STAMPED "12-41"

FROM THE INTERSECTION OF US 40 AND PLAINCITY-GEORGESVILLE ROAD, JUST EAST OF THE VILLAGE OF WEST JEFFERSVILLE, GO NORTH ON PLAINCITY-GEORGESVILLE ROAD 4.5 MILES TO LUCAS ROAD, TURN LEFT ON LUCAS ROAD, MONUMENT IS ON THE NORTH SIDE OF LUCAS ROAD, 40 FEET FROM INTERSECTION.

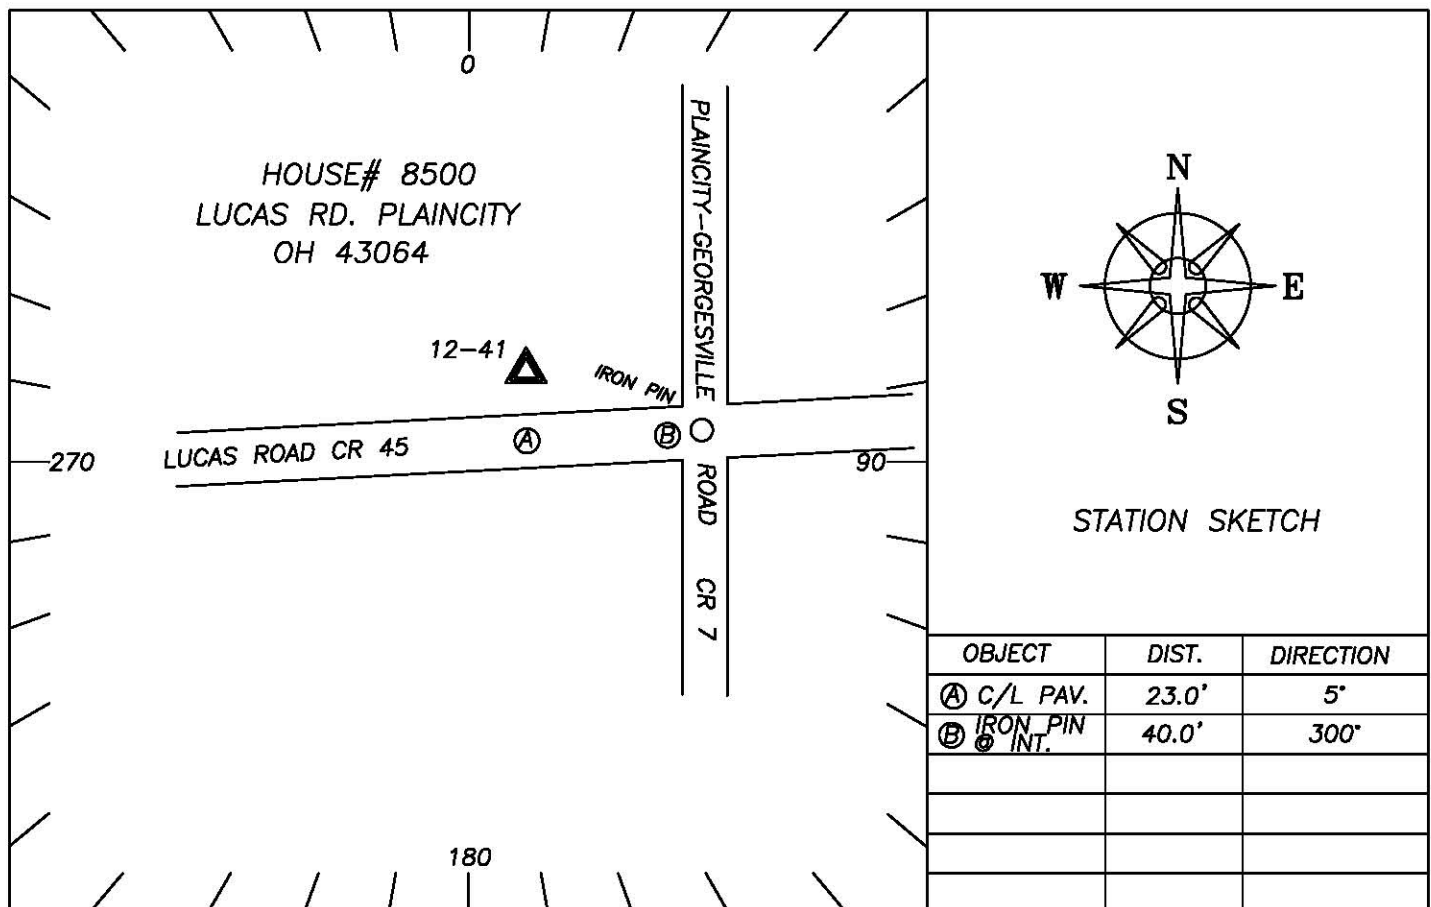



COTTRILL SURVEYING, LLC
8256 S.R. 207 N.E. MT. STERLING, OHIO 43143
PH. (740) 869-3811

PROJECT: S120305(C)
MADISON CO. ENGINEER
LONDON, OH. 43140

REPORT ON ESTABLISHMENT OF SURVEY MARK


DESCRIPTION OF MARK	DATE	QUAD:	STATE: OHIO
12-42	5/09/12	INDEX:	COUNTY: MADISON
WGS 84		GRID ZONE: OH SOUTH	HEIGHT
LAT: N 40°02'34.91471"		N 745034.058 (FT.)	ELLIPSOID: 250.131(M)
LONG.: W 83°15'50.72453"		E 1754566.780 (FT.)	ORTHO: 929.92 FT.
HORIZONTAL DATUM: NAD 83(96)		PAF:	GRID METERS
			N 227086.835 (M)
VERTICAL DATUM: NAD 88		GEOID MODEL: 09	E 534793.024 (M)
			ORTHO: 283.439(M)

NOTE: ALL ELEVATIONS ARE BASED ON GPS

DETAILED STATION DESCRIPTION:

APPROX. 1' DIAMETER REINFORCED CONCRETE MONUMENT WITH BRASS TABLET STAMPED "12-42"

FROM THE INTERSECTION OF US 40 AND PLAINCITY-GEORGESVILLE ROAD, JUST EAST OF THE VILLAGE OF WEST JEFFERSVILLE, GO NORTH ON PLAINCITY-GEORGESVILLE ROAD 6.8 MILES TO PRICE HILLIARDS ROAD, TRUN LEFT ON PRICE HILLIARDS ROAD, MONUMENT IS ON THE NORTH SIDE OF ROAD APPROX. 59.5' WEST OF THE CENTERLINE INT. AND 22 FEET NORTH OF THE C/L PAVEMENT OF PRICE-HILLARDS RD.

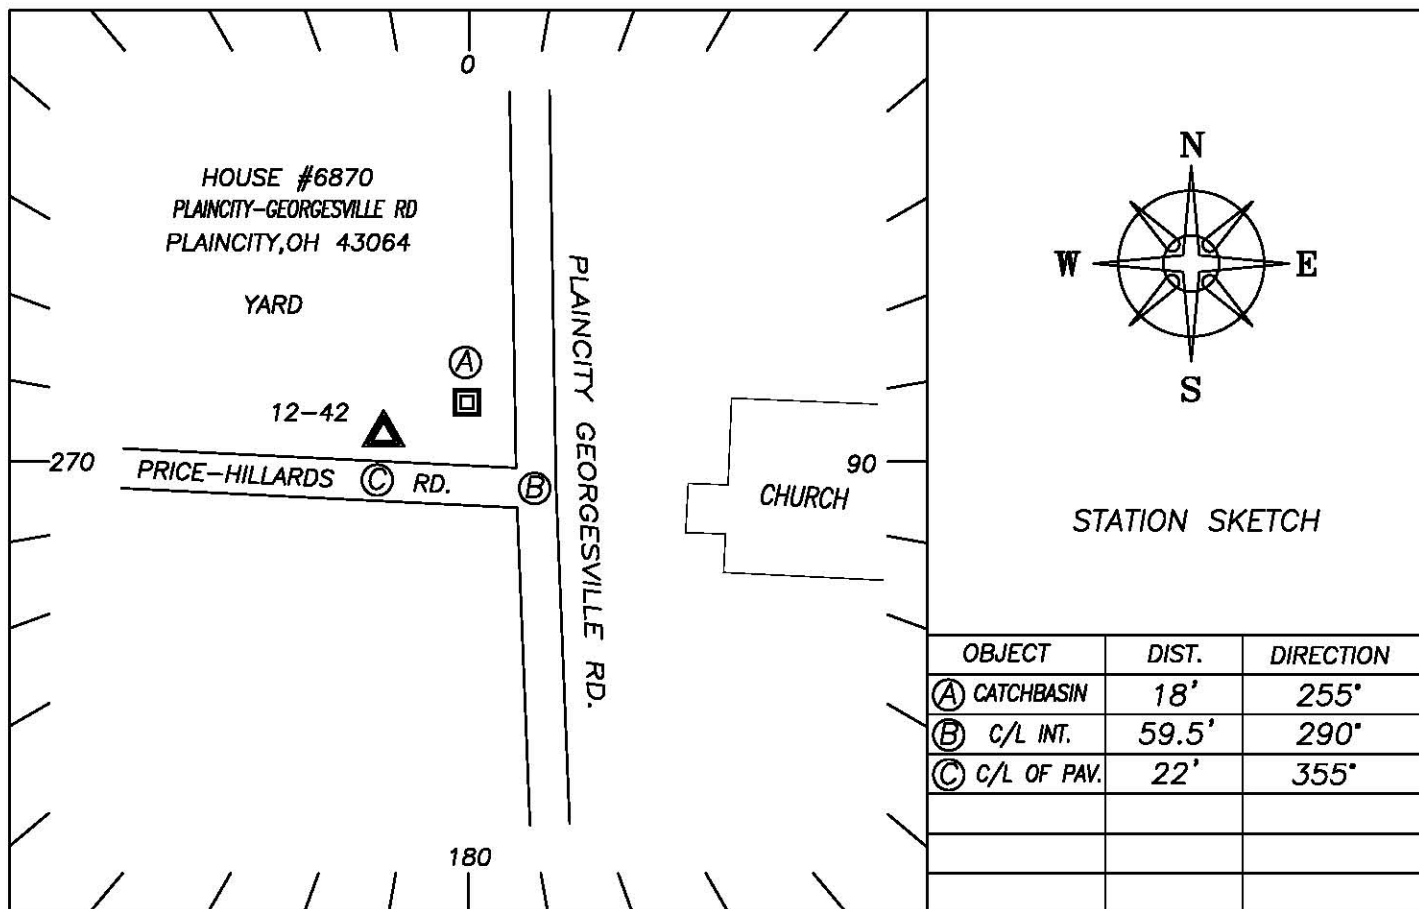



COTTRILL SURVEYING, LLC
8256 S.R. 207 N.E. MT. STERLING, OHIO 43143
PH. (740) 869-3811

PROJECT: S120305E
MADISON CO. ENGINEER
LONDON, OH. 43140

REPORT ON ESTABLISHMENT OF SURVEY MARK


DESCRIPTION OF MARK	DATE	QUAD:	STATE: OHIO
12-43		INDEX:	COUNTY: MADISON
WGS 84		GRID ZONE: OH SOUTH	HEIGHT
LAT: N39°53'45.98213"		N 692188.1465 (FT.)	ELLIPSOID: 309.127 (M)
LONG.: W83°30'31.95509"		E 1685435.0051 (FT.)	ORTHO: 1122.05 (FT.)
HORIZONTAL DATUM: NAD 83(96)		PAF:	GRID METERS
			N 210979.369 (M)
VERTICAL DATUM: NAD 88		GEOID MODEL: 09	E 513721.617 (M)
			ORTHO: 342.003(M)

NOTE: ALL ELEVATIONS ARE BASED ON GPS

DETAILED STATION DESCRIPTION:

APPROX. 1' DIAMETER REINFORCED CONCRETE MONUMENT WITH BRASS TABLET STAMPED "12-43"

FROM THE INTERSECTION OF STATE ROUTE 56 WITH OLD SPRINGFIELD ROAD, IN THE CITY OF LONDON, GO WEST ON OLD SPRINGFIELD ROAD 2.9 MILES TO ROBERTS MILL ROAD, TURN RIGHT ON ROBERTS MILL ROAD, MONUMENT IS ON THE EAST SIDE OF ROAD, 65 FEET NORTH OF INTERSECTION.

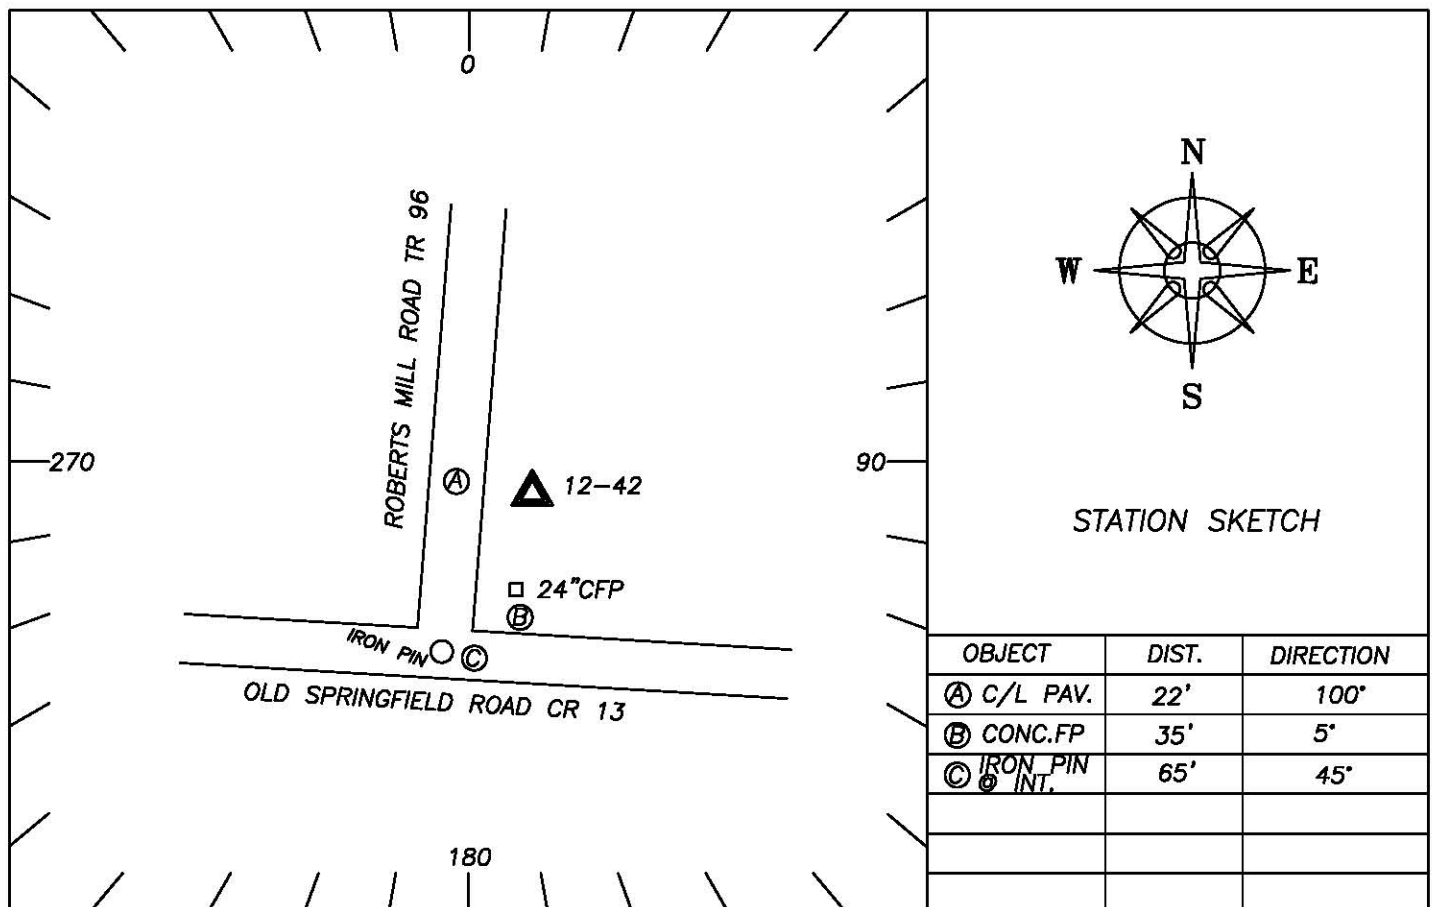



COTTRILL SURVEYING, LLC
8256 S.R. 207 N.E. MT. STERLING, OHIO 43143
PH. (740) 869-3811

PROJECT: S120305F
MADISON CO. ENGINEER
LONDON, OH. 43140

REPORT ON ESTABLISHMENT OF SURVEY MARK


DESCRIPTION OF MARK	DATE	QUAD:	STATE: OHIO
12-44		INDEX:	COUNTY: MADISON
WGS 84		GRID ZONE: OH SOUTH	HEIGHT
LAT: N 40°00'29.10872"		N 732698.5182 (FT.)	ELLIPSOID: 273.980 (M)
LONG.: W 83°24'55.75773"		E 1712049.9552 (FT.)	ORTHO: 1007.66 (FT.)
HORIZONTAL DATUM: NAD 83(96)		PAF:	GRID METERS
			N 223326.955 (M)
VERTICAL DATUM: NAD 88		GEOID MODEL: 09	E 521833.870 (M)
			ORTHO: 307.136(M)

NOTE: ALL
ELEVATIONS ARE
BASED ON GPS

DETAILED STATION DESCRIPTION:

APPROX. 1' DIAMETER REINFORCED CONCRETE MONUMENT WITH BRASS TABLET STAMPED "12-44"

FROM THE INTERSECTION OF STATE ROUTE 38 AND ARTHUR BRADLEY ROAD, IN THE VILLAGE OF PLUMWOOD,
THE MONUMENT IS 45 FEET NORTH.

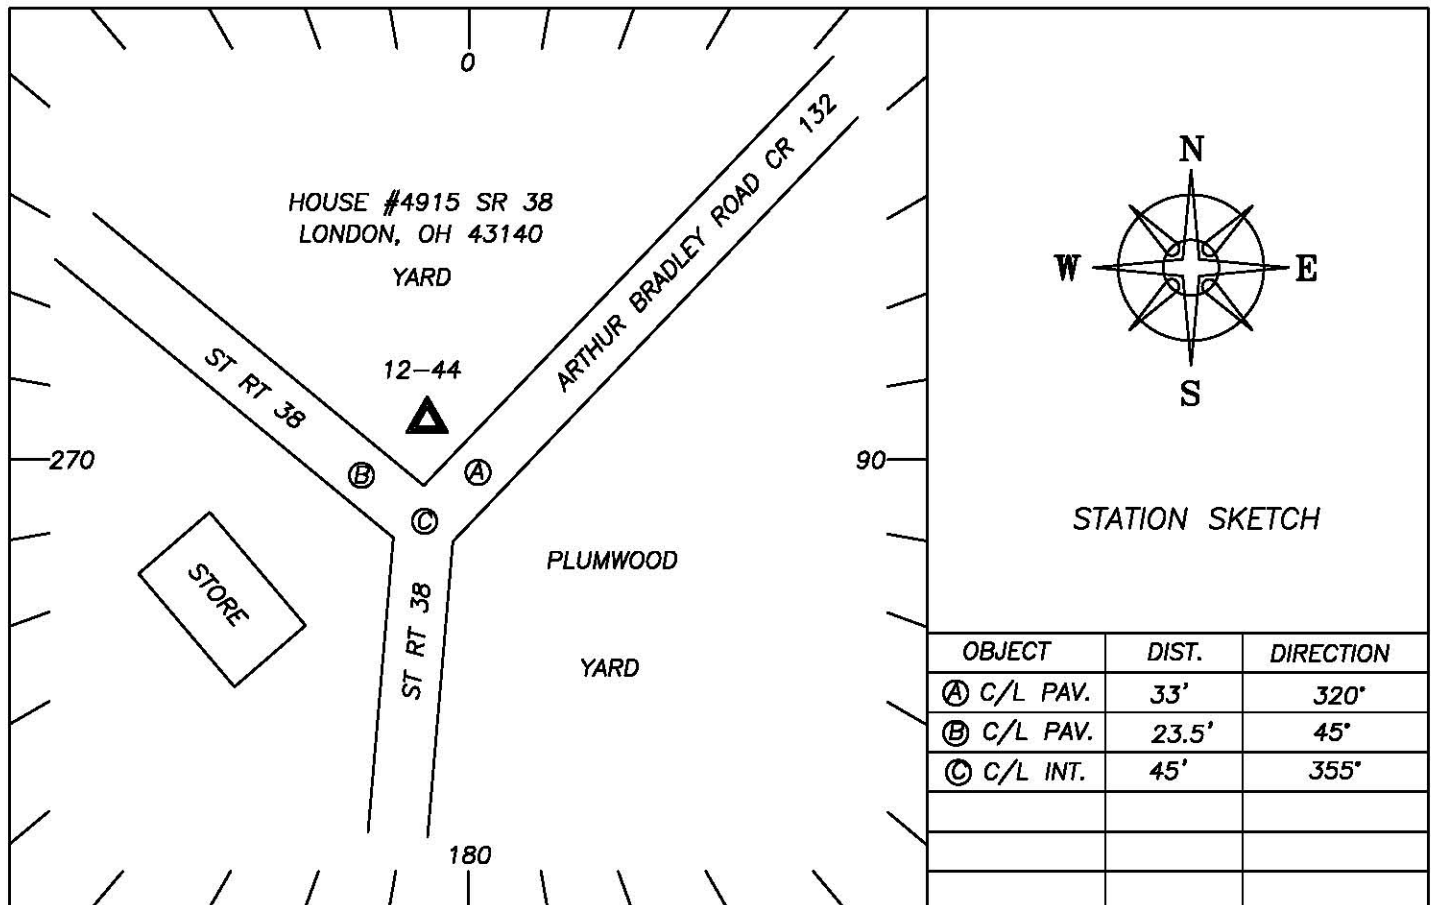



COTTRILL SURVEYING, LLC
8256 S.R. 207 N.E. MT. STERLING, OHIO 43143
PH. (740) 869-3811

PROJECT: S120305D
MADISON CO. ENGINEER
LONDON, OH. 43140

REPORT ON ESTABLISHMENT OF SURVEY MARK


DESCRIPTION OF MARK	DATE	QUAD:	STATE: OHIO
12-45		INDEX:	COUNTY: MADISON
WGS 84		GRID ZONE: OH SOUTH	HEIGHT
LAT: N 40°04'25.66244"		N 756609.913 (FT.)	ELLIPSOID: 264.945(M)
LONG.: W 83°24'24.40846"		E 1714729.605 (FT.)	ORTHO: 978.35 FT.
HORIZONTAL DATUM: NAD 83(96)		PAF:	GRID METERS
			N 230615.163 (M)
VERTICAL DATUM: NAD 88		GEOID MODEL: 09	E 522650.629 (M)
			ORTHO: 298.201(M)

NOTE: ALL ELEVATIONS ARE BASED ON GPS

DETAILED STATION DESCRIPTION:

APPROX. 1' DIAMETER REINFORCED CONCRETE MONUMENT WITH BRASS TABLET STAMPED "12-45"

FROM THE INTERSECTION OF STATE ROUTE 38 AND ROSEDALE-PLAINCITY ROAD GO WEST ON ROSEDALE-PLAINCITY ROAD 83 FEET, MONUMENT IS ON THE NORTH SIDE OF ROAD.

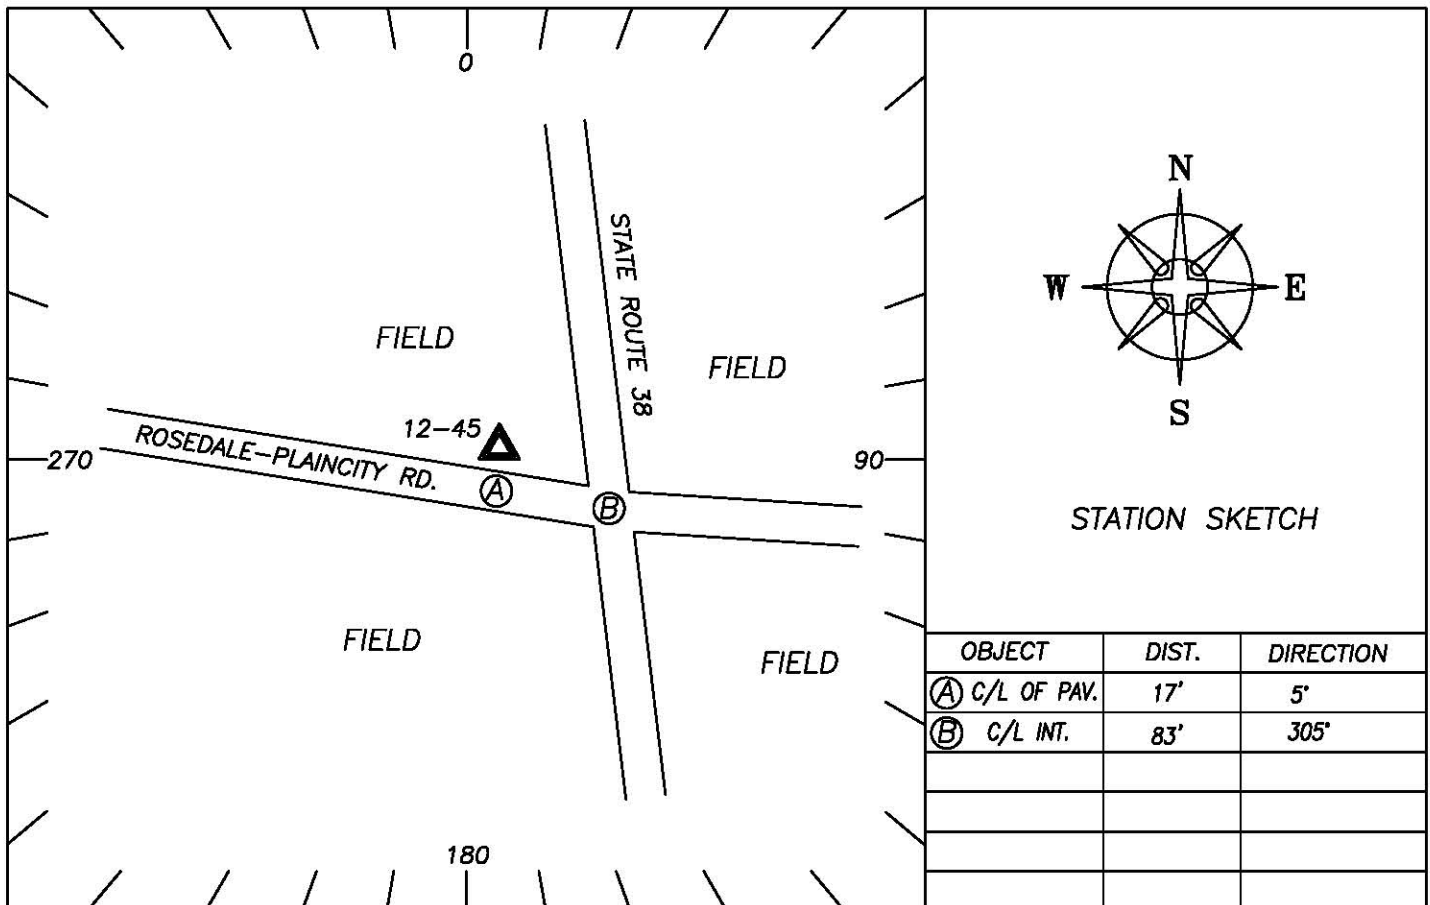



CANTER SURVEYING
GPS SERVICES, INC.

PROJECT: 22010
MADISON CO. ENGINEER
222 GARFIELD AVE
LONDON, OH 43140

REPORT ON ESTABLISHMENT OF SURVEY MARK


DESCRIPTION OF MARK	DATE	QUAD: X	STATE: OHIO
DEAN	3-20-02	INDEX:	COUNTY: MADISON
WGS 84		GRID ZONE: OH SOUTH	HEIGHT
LAT: N39°56'28.272331"		N 708426.5008	ELLIPSOID: 289.4501 m
LONG: W83°26'56.058476"		E 1702433.3432	ORTHO: 1057.79 FT.
HORIZONTAL DATUM: NAD 83 (95)		PAF: X	GRID METERS
VERTICAL DATUM: NAVD 88		GEOID MODEL: GEOID 99	N 215928.8293
		E 518902.7208	ORTHO: 322.42 m.

NOTE: ALL
ELEVATIONS ARE
BASED ON GPS

DETAILED STATION DESCRIPTION

BRASS TABLET IN POURED IN PLACE MONUMENT.

SURVEY MONUMENT IS ON EAST SIDE OF SR 38, AND SOUTH OF I-70.

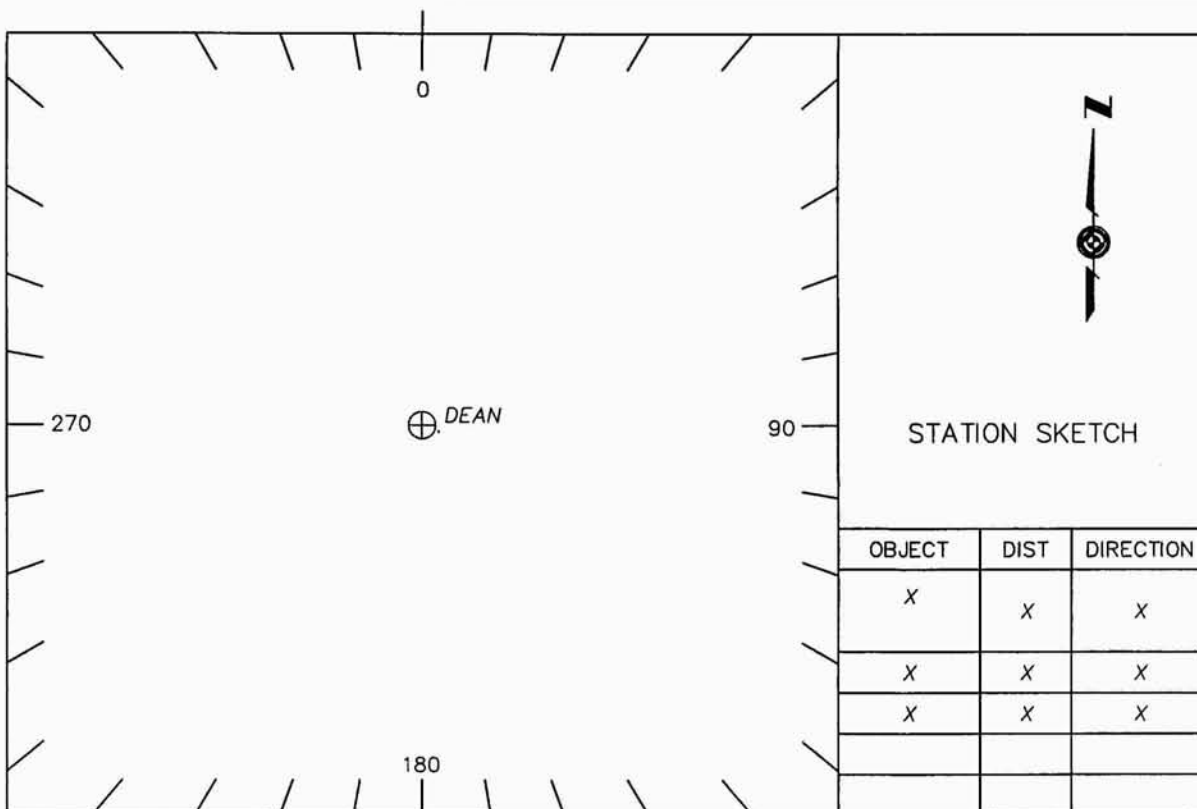



CANTER SURVEYING
GPS SERVICES, INC.

PROJECT: 22010
MADISON CO. ENGINEER
222 GARFIELD AVE
LONDON, OH 43140

REPORT ON ESTABLISHMENT OF SURVEY MARK


DESCRIPTION OF MARK	DATE	QUAD: X	STATE: OHIO
IVY	3-20-02	INDEX:	COUNTY: MADISON
WGS 84		GRID ZONE: OH SOUTH	HEIGHT
LAT: N39°56'43.814816"		N 709925.1176	ELLIPSOID: 275.6775 m
LONG: W83°25'24.402322'		E 1709588.0000	ORTHO: 1012.64 FT.
HORIZONTAL DATUM: NAD 83 (95)		PAF: X	GRID METERS
VERTICAL DATUM: NAVD 88		GEOID MODEL: GEOID 99	N 216385.6086
		E 521083.4646	ORTHO: 308.65 m.

NOTE: ALL
ELEVATIONS ARE
BASED ON GPS

DETAILED STATION DESCRIPTION

BRASS TABLET IN POURED IN PLACE MONUMENT.

SURVEY MONUMENT IS EAST OF ROW FENCE, SOUTH OF I-70.

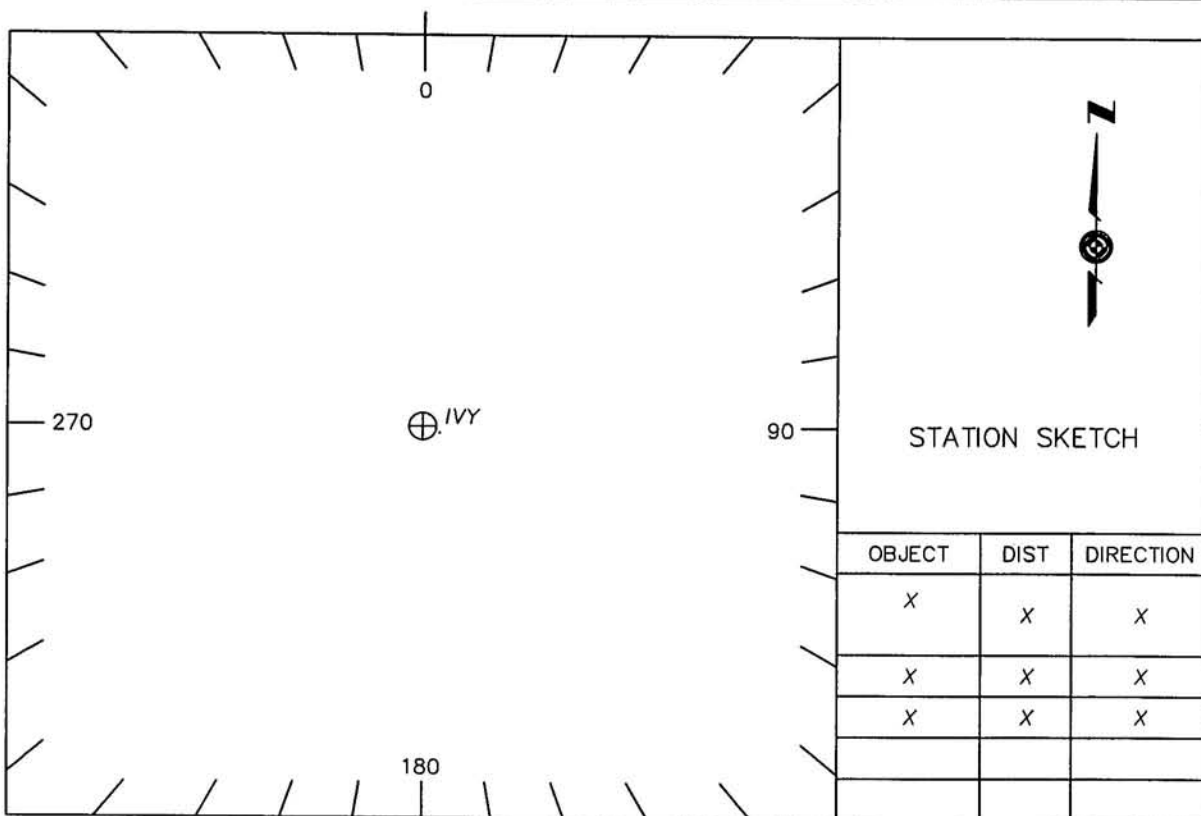



CANTER SURVEYING
GPS SERVICES, INC.

PROJECT: 22010
MADISON CO. ENGINEER
222 GARFIELD AVE
LONDON, OH 43140

REPORT ON ESTABLISHMENT OF SURVEY MARK


DESCRIPTION OF MARK	DATE	QUAD: X	STATE: OHIO
M-4	3-20-02	INDEX:	COUNTY: MADISON
WGS 84		GRID ZONE: OH SOUTH	HEIGHT
LAT: N39°56'31.420889"	N	708895.4545	ELLIPSOID: 299.8249 m
LONG: W83°29'55.093681"	E	1688492.9002	ORTHO: 1091.83 FT.
HORIZONTAL DATUM: NAD 83 (95)	PAF: X		GRID METERS
VERTICAL DATUM: NAVD 88	GEOID MODEL: GEOID 99		N 216071.7667
		E 514653.6653	ORTHO: 332.79 m.


NOTE: ALL
ELEVATIONS ARE
BASED ON GPS

DETAILED STATION DESCRIPTION

BRASS TABLET IN POURED IN PLACE MONUMENT.

SURVEY MONUMENT IS ON SOUTH SIDE OF EB 1-70, APPROXIMATELY 300' EAST OF SR 56.

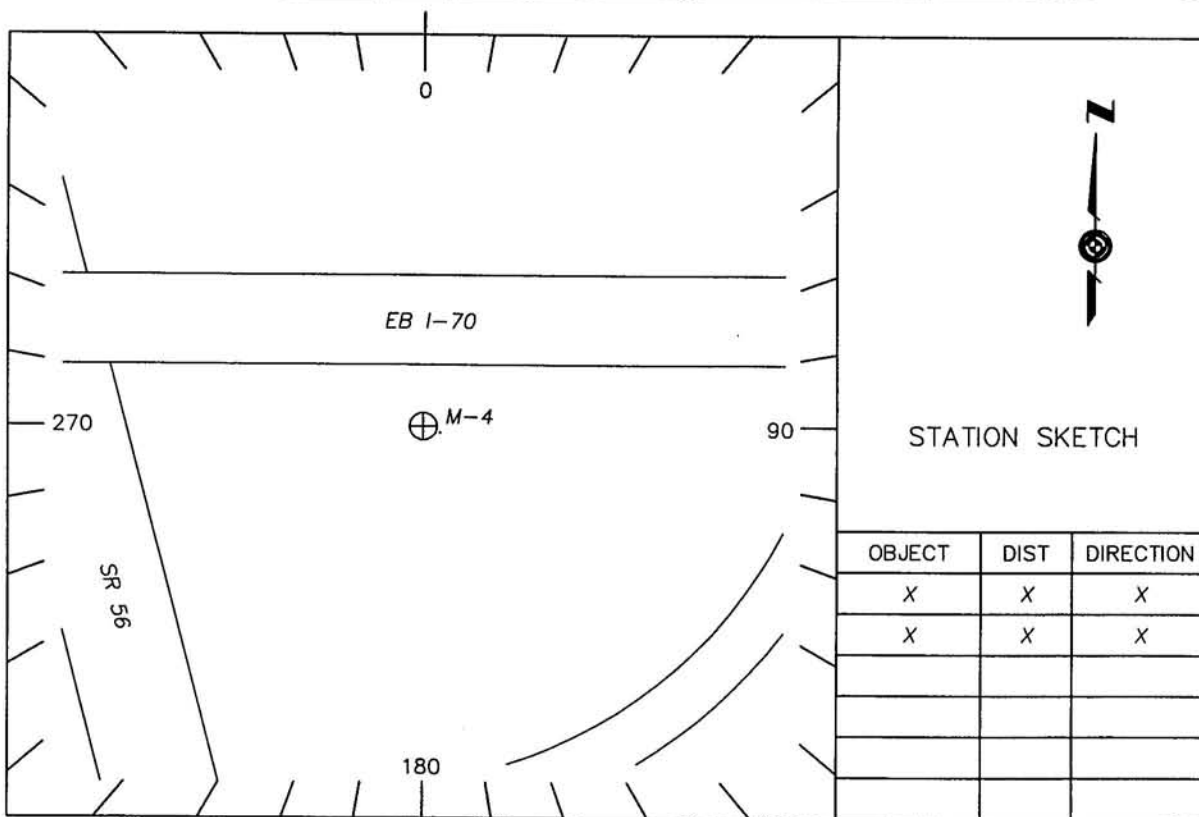



PROJECT: 22010
MADISON CO. ENGINEER
222 GARFIELD AVE
LONDON, OH 43140

REPORT ON ESTABLISHMENT OF SURVEY MARK


DESCRIPTION OF MARK	DATE	QUAD: X	STATE: OHIO	NOTE: ALL ELEVATIONS ARE BASED ON GPS
MAD 1	3-20-02	INDEX:	COUNTY: MADISON	
WGS 84		GRID ZONE: OH SOUTH	HEIGHT	
LAT: N39°56'0.265710"		N 705648.5160	ELLIPSOID: 294.0637 m	
LONG: W83°28'3.540380"		E 1697147.2089	ORTHO: 1072.86 FT.	
HORIZONTAL DATUM: NAD 83 (95)		PAF: X	GRID METERS	
VERTICAL DATUM: NAVD 88		GEOID MODEL: GEOID 99	N 215082.0978	
			E 517291.5039	ORTHO: 327.01 m.

NOTE: ALL
ELEVATIONS ARE
BASED ON GPS

DETAILED STATION DESCRIPTION

BRASS TABLET IN POURED IN PLACE MONUMENT.

SURVEY MONUMENT IS NGS HARN MONUMENT LOCATED AT MADISON COUNTY AIRPORT, IN NORTHWEST QUADRANT IN THE JUNCTION OF THE TAXYWAY AND APRON NEAR THE WEST END OF THE AIRFIELD.

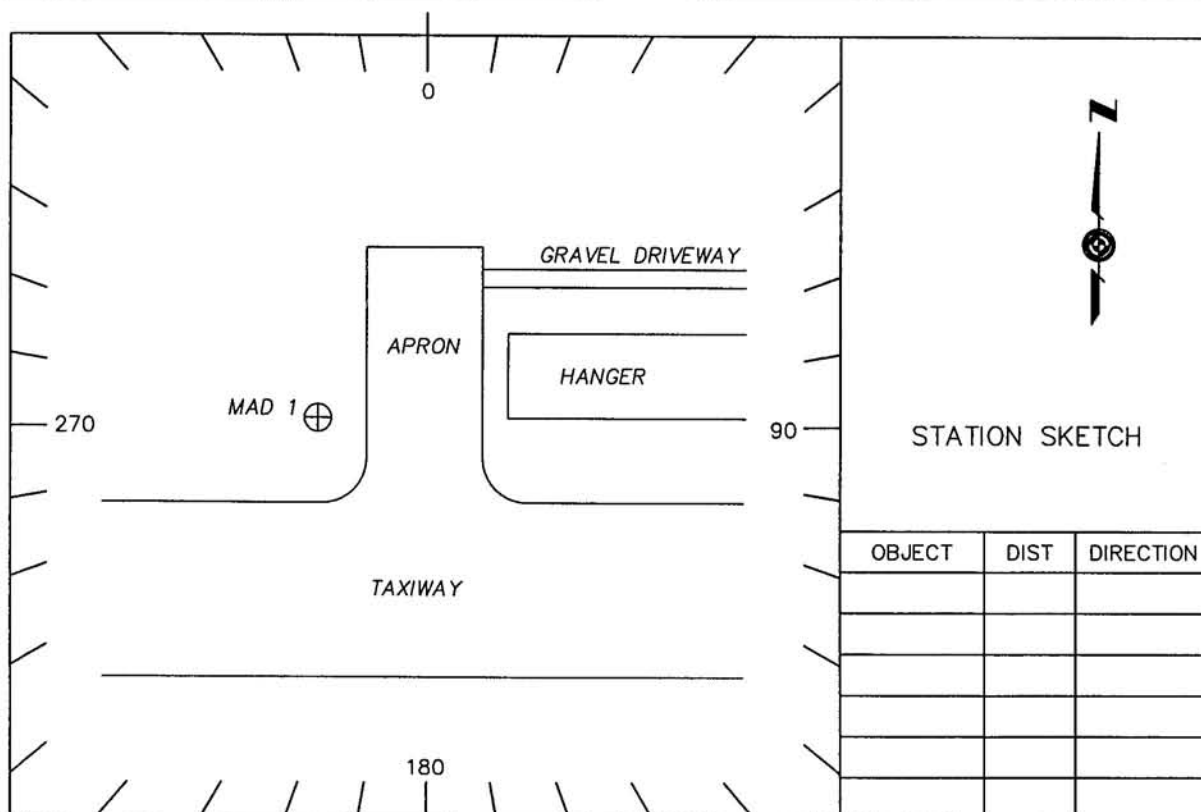



PROJECT: 22010
MADISON CO. ENGINEER
222 GARFIELD AVE
LONDON, OH 43140

REPORT ON ESTABLISHMENT OF SURVEY MARK


DESCRIPTION OF MARK	DATE	QUAD: X	STATE: OHIO	NOTE: ALL ELEVATIONS ARE BASED ON GPS
MOLLY	3-20-02	INDEX:	COUNTY: MADISON	
WGS 84		GRID ZONE: OH SOUTH	HEIGHT	
LAT: N39°56'32.393526"		N 708810.7304	ELLIPSOID: 280.8287 m	
LONG: W83°26'15.792515"		E 1705573.7565	ORTHO: 1029.52 FT.	
HORIZONTAL DATUM: NAD 83 (95)		PAF: X	GRID METERS	
VERTICAL DATUM: NAVD 88		GEOID MODEL: GEOID 99	N 216045.9427	
			E 519859.9207	ORTHO: 313.80 m.

NOTE: ALL
ELEVATIONS ARE
BASED ON GPS

DETAILED STATION DESCRIPTION

BRASS TABLET IN POURED IN PLACE MONUMENT.

SURVEY MONUMENT IS SOUTH OF I-70 AND NORTH OF ROW FENCE.

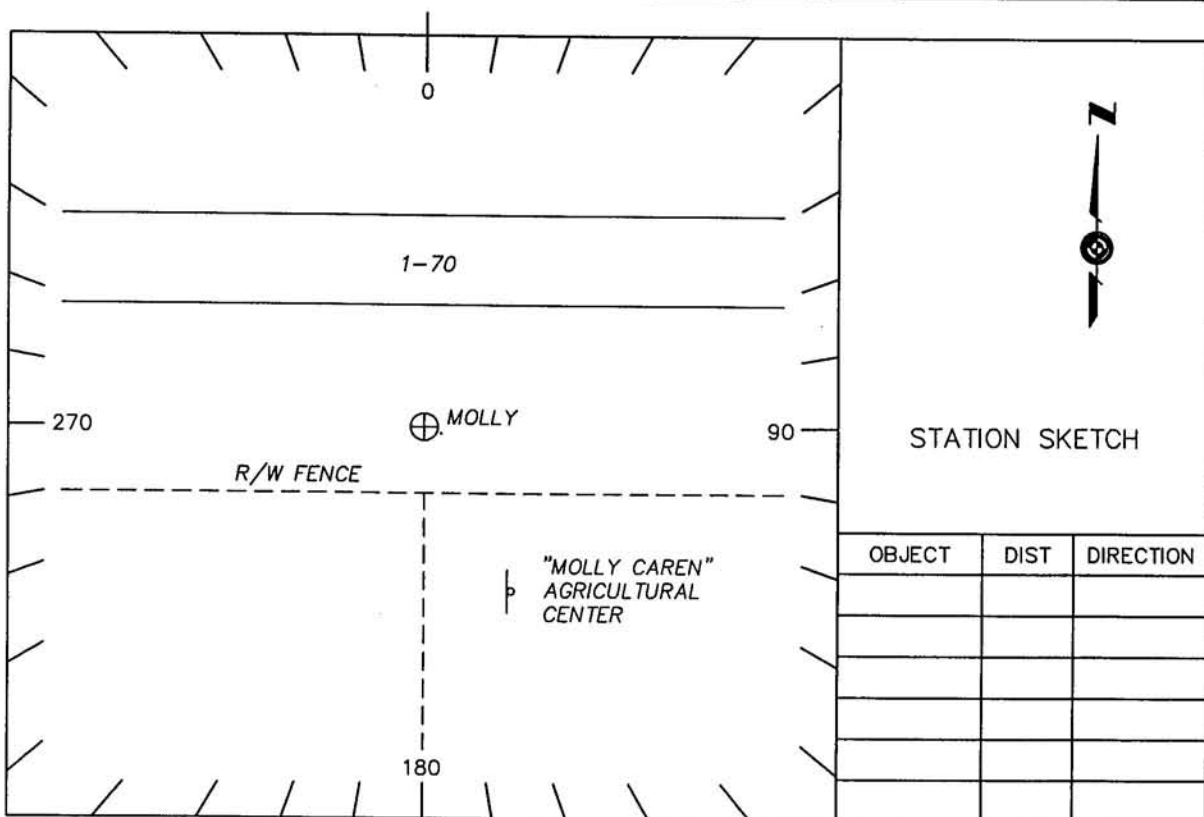



PROJECT: 22010
MADISON CO. ENGINEER
222 GARFIELD AVE
LONDON, OH 43140

REPORT ON ESTABLISHMENT OF SURVEY MARK


DESCRIPTION OF MARK	DATE	QUAD: X	STATE: OHIO	NOTE: ALL ELEVATIONS ARE BASED ON GPS
MOLLY	3-20-02	INDEX:	COUNTY: MADISON	
WGS 84		GRID ZONE: OH SOUTH	HEIGHT	
LAT: N39°56'32.393526"		N 708810.7304	ELLIPSOID: 280.8287 m	
LONG: W83°26'15.792515"		E 1705573.7565	ORTHO: 1029.52 FT.	
HORIZONTAL DATUM: NAD 83 (95)		PAF: X	GRID METERS	
VERTICAL DATUM: NAVD 88		GEOID MODEL: GEOID 99	N 216045.9427	
			E 519859.9207	ORTHO: 313.80 m.


NOTE: ALL
ELEVATIONS ARE
BASED ON GPS

DETAILED STATION DESCRIPTION

BRASS TABLET IN POURED IN PLACE MONUMENT.

SURVEY MONUMENT IS SOUTH OF I-70 AND NORTH OF ROW FENCE.

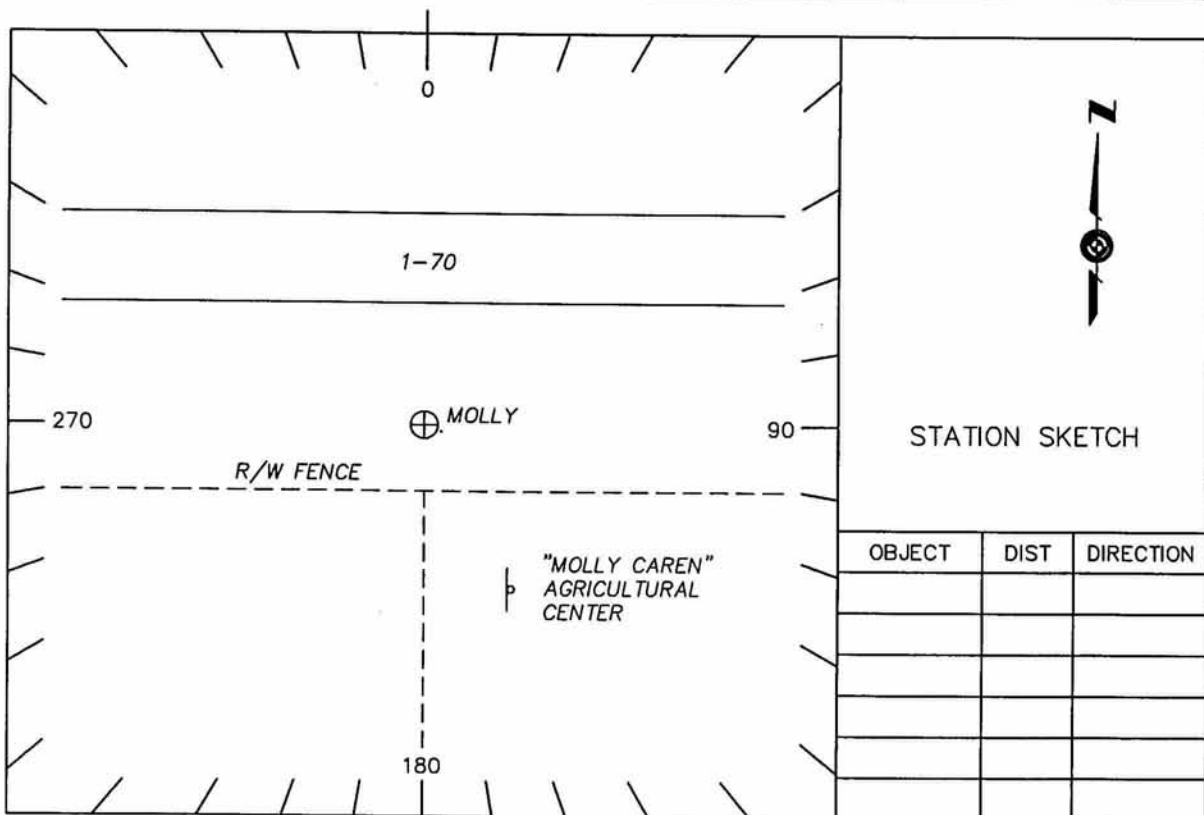



PROJECT: 22010
MADISON CO. ENGINEER
222 GARFIELD AVE
LONDON, OH 43140

REPORT ON ESTABLISHMENT OF SURVEY MARK


DESCRIPTION OF MARK	DATE	QUAD: X	STATE: OHIO	NOTE: ALL ELEVATIONS ARE BASED ON GPS
TWP 107008	3-20-02	INDEX:	COUNTY: MADISON	
WGS 84		GRID ZONE: OH SOUTH	HEIGHT	
LAT: N39°56'30.373318"		N 708870.2161	ELLIPSOID: 319.3091 m	
LONG: W83°31'27.655641"		E 1681282.7317	ORTHO: 1155.77 FT.	
HORIZONTAL DATUM: NAD 83 (95)		PAF: X	GRID METERS	
VERTICAL DATUM: NAVD 88		GEOID MODEL: GEOID 99	N 216064.0740	
			E 512456.0015	ORTHO: 352.28 m.

NOTE: ALL
ELEVATIONS ARE
BASED ON GPS

DETAILED STATION DESCRIPTION

BRASS TABLET IN POURED IN PLACE MONUMENT.

SURVEY MONUMENT IS NORTH OF OVERPASS OF I-70 OVER POTTE ROAD.

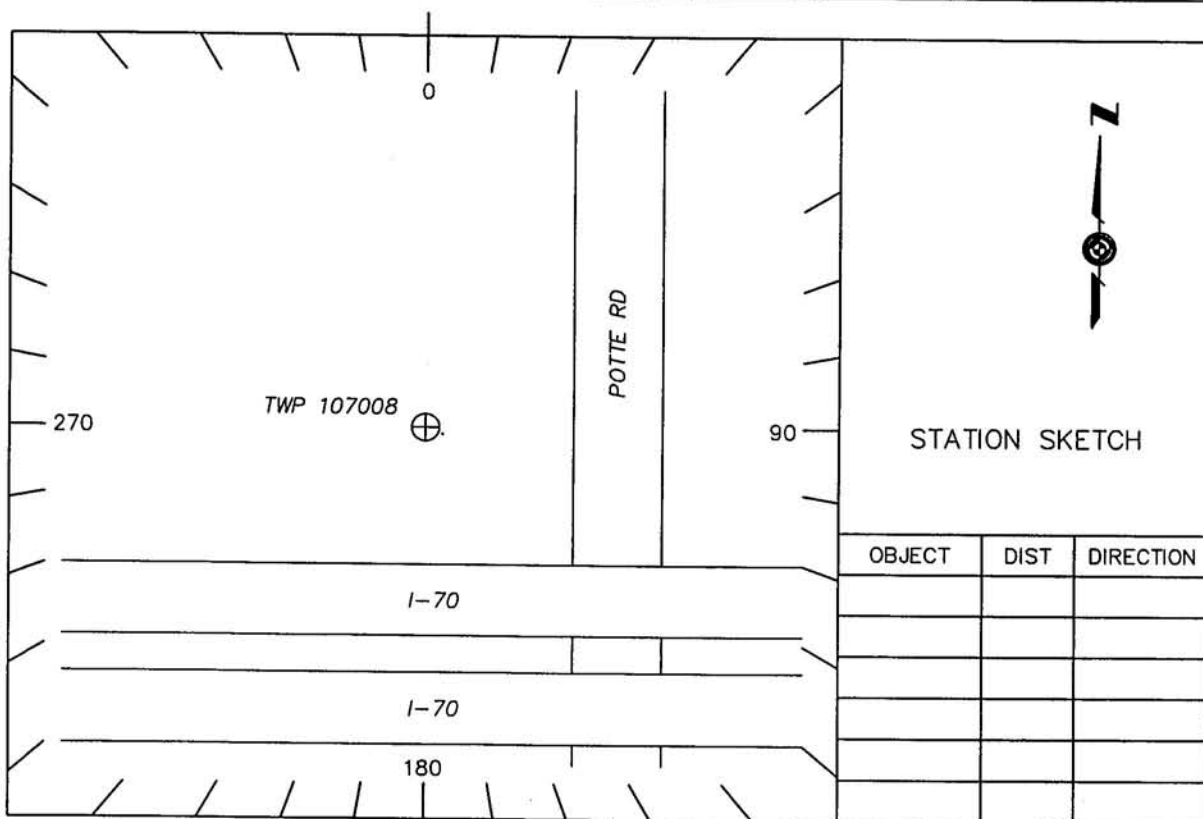



PROJECT: 22010
MADISON CO. ENGINEER
222 GARFIELD AVE
LONDON, OH 43140

REPORT ON ESTABLISHMENT OF SURVEY MARK

DESCRIPTION OF MARK	DATE	QUAD: X	STATE: OHIO	NOTE: ALL ELEVATIONS ARE BASED ON GPS
TWP111 0045	3-20-02	INDEX:	COUNTY: MADISON	
WGS 84		GRID ZONE: OH SOUTH	HEIGHT	
LAT: N39°56'29.644222"		N 708625.9006	ELLIPSOID: 303.0780 m	
LONG: W83°28'21.240225"		E 1695800.5381	ORTHO: 1102.50 FT.	
HORIZONTAL DATUM: NAD 83 (95)		PAF: X	GRID METERS	
VERTICAL DATUM: NAVD 88			N 215992.6545	
		GEOID MODEL: GEOID 99	E 516881.0378	
				ORTHO: 336.04 m.

NOTE: ALL
ELEVATIONS ARE
BASED ON GPS

DETAILED STATION DESCRIPTION

BRASS TABLET IN POURED IN PLACE MONUMENT.

SURVEY MONUMENT IS SOUTH OF OVERPASS OF I-70 OVER GWYNNE ROAD.

